SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F, (H8DG6-F, Opteron 6338P)
AMD Opteron 6338P)

SPECfp®_rate2006 = 342

SPECfp_rate_base2006 = 312

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

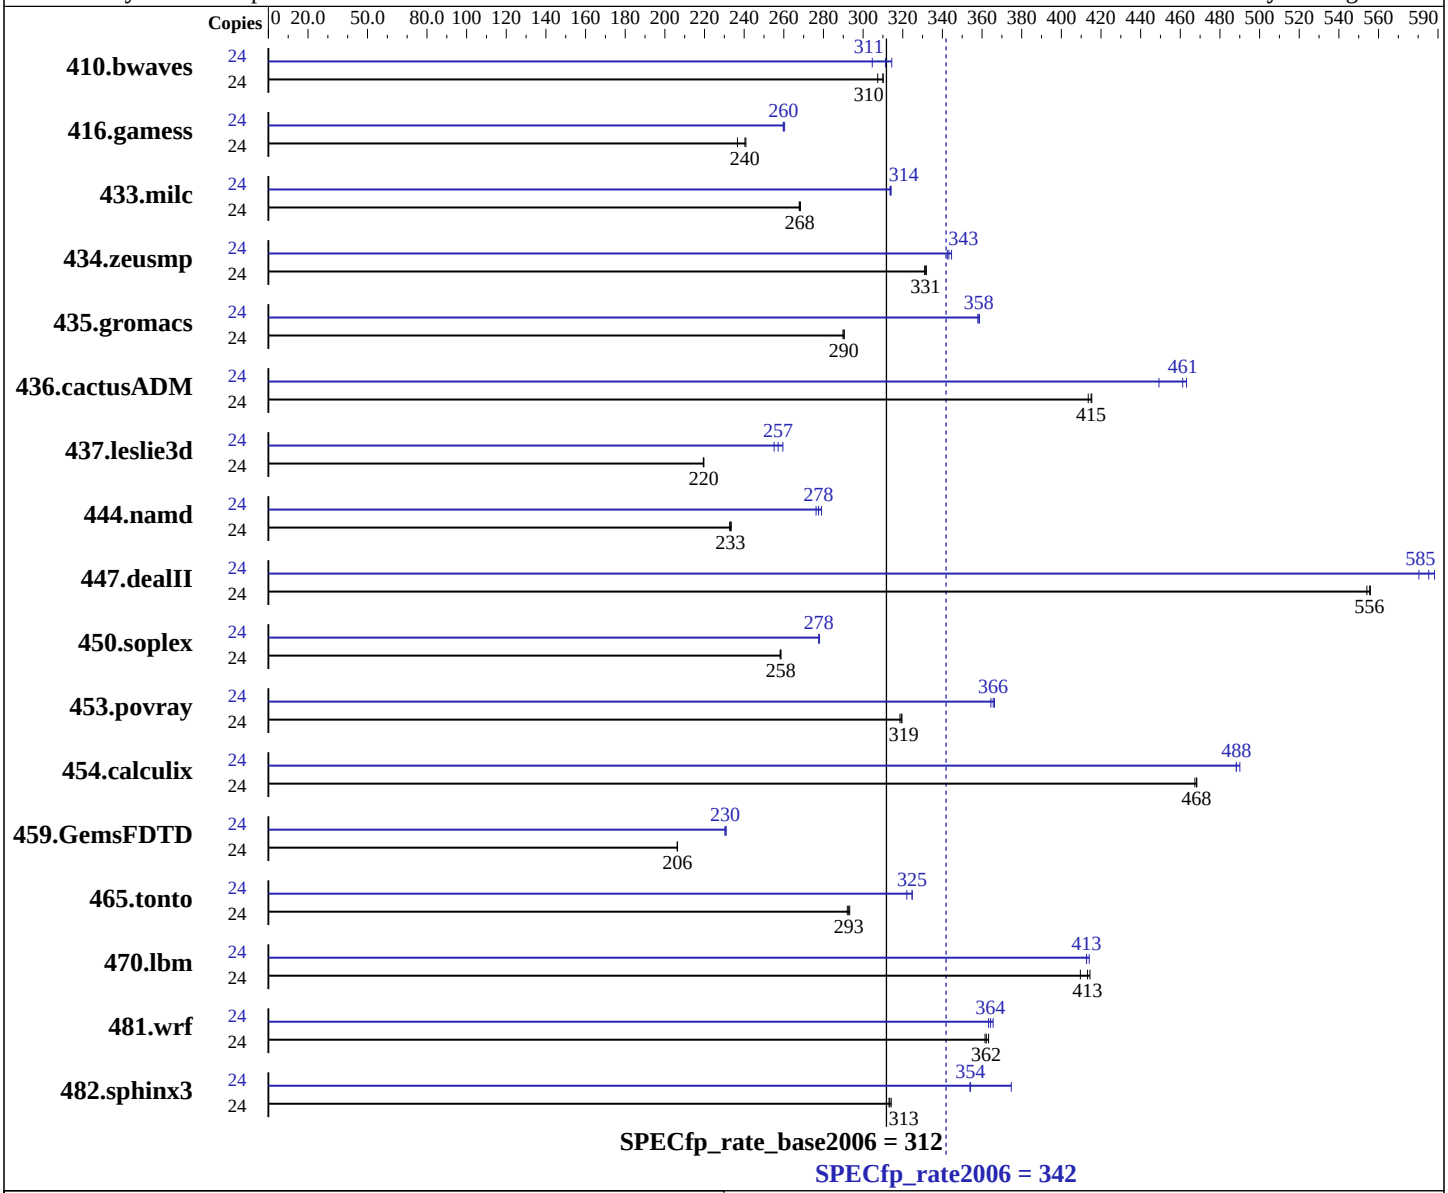

Hardware

CPU Name:	AMD Opteron 6338P
CPU Characteristics:	AMD Turbo CORE technology up to 2.80 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4022G-6F, (H8DG6-F, Opteron 6338P)
AMD Opteron 6338P)

SPECfp_rate2006 = 342

SPECfp_rate_base2006 = 312

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1061	307	**1052**	**310**	1052	310	24	1071	305	**1048**	**311**	1037	314
416.gamess	24	**1955**	**240**	1986	237	1951	241	24	1809	260	**1808**	**260**	1805	260
433.milc	24	823	268	821	268	**822**	**268**	24	**702**	**314**	701	314	703	314
434.zeusmp	24	660	331	658	332	**659**	**331**	24	638	343	634	345	**636**	**343**
435.gromacs	24	591	290	**590**	**290**	590	290	24	478	359	479	358	**478**	**358**
436.cactusADM	24	691	415	693	414	**691**	**415**	24	619	463	**622**	**461**	638	449
437.leslie3d	24	1028	219	**1027**	**220**	1027	220	24	**877**	**257**	869	260	884	255
444.namd	24	824	233	**825**	**233**	827	233	24	**694**	**278**	697	276	690	279
447.dealII	24	**494**	**556**	494	556	495	554	24	473	580	**469**	**585**	467	588
450.soplex	24	**774**	**258**	775	258	774	258	24	721	278	720	278	**721**	**278**
453.povray	24	401	319	399	320	**400**	**319**	24	349	366	**349**	**366**	350	364
454.calculix	24	423	468	424	467	**423**	**468**	24	**405**	**488**	404	490	406	488
459.GemsFDTD	24	**1234**	**206**	1234	206	1235	206	24	1103	231	**1105**	**230**	1105	230
465.tonto	24	809	292	**807**	**293**	805	293	24	733	322	**727**	**325**	727	325
470.lbm	24	**798**	**413**	796	414	805	410	24	**799**	**413**	799	413	796	414
481.wrf	24	**740**	**362**	738	363	742	362	24	738	363	**736**	**364**	733	366
482.sphinx3	24	1489	314	**1492**	**313**	1494	313	24	1322	354	**1320**	**354**	1248	375

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
```

Continued on next page

Operating System Notes (Continued)

```
Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
C State mode set to disabled under Processor & Clock Options in BIOS.
HPC Mode set to enabled under Processor & Clock Options in BIOS.
C1E Support set to disabled under Processor & Clock Options in BIOS.
Power Down Enable set to disabled in Memory Configuration in BIOS.
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-Ofast -OPT:unroll_size=256 -OPT:alias=disjoint -GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m -march=bdver1`

481.wrf: `-Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP -WOPT:sib=on -march=bdver1`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html
http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml
http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:08:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 February 2014.