SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-4042G-6RF, (H8QG6-F, Opteron 6338P)
AMD Opteron 6338P

SPECfp®_rate2006 = 680

SPECfp_rate_base2006 = 619

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

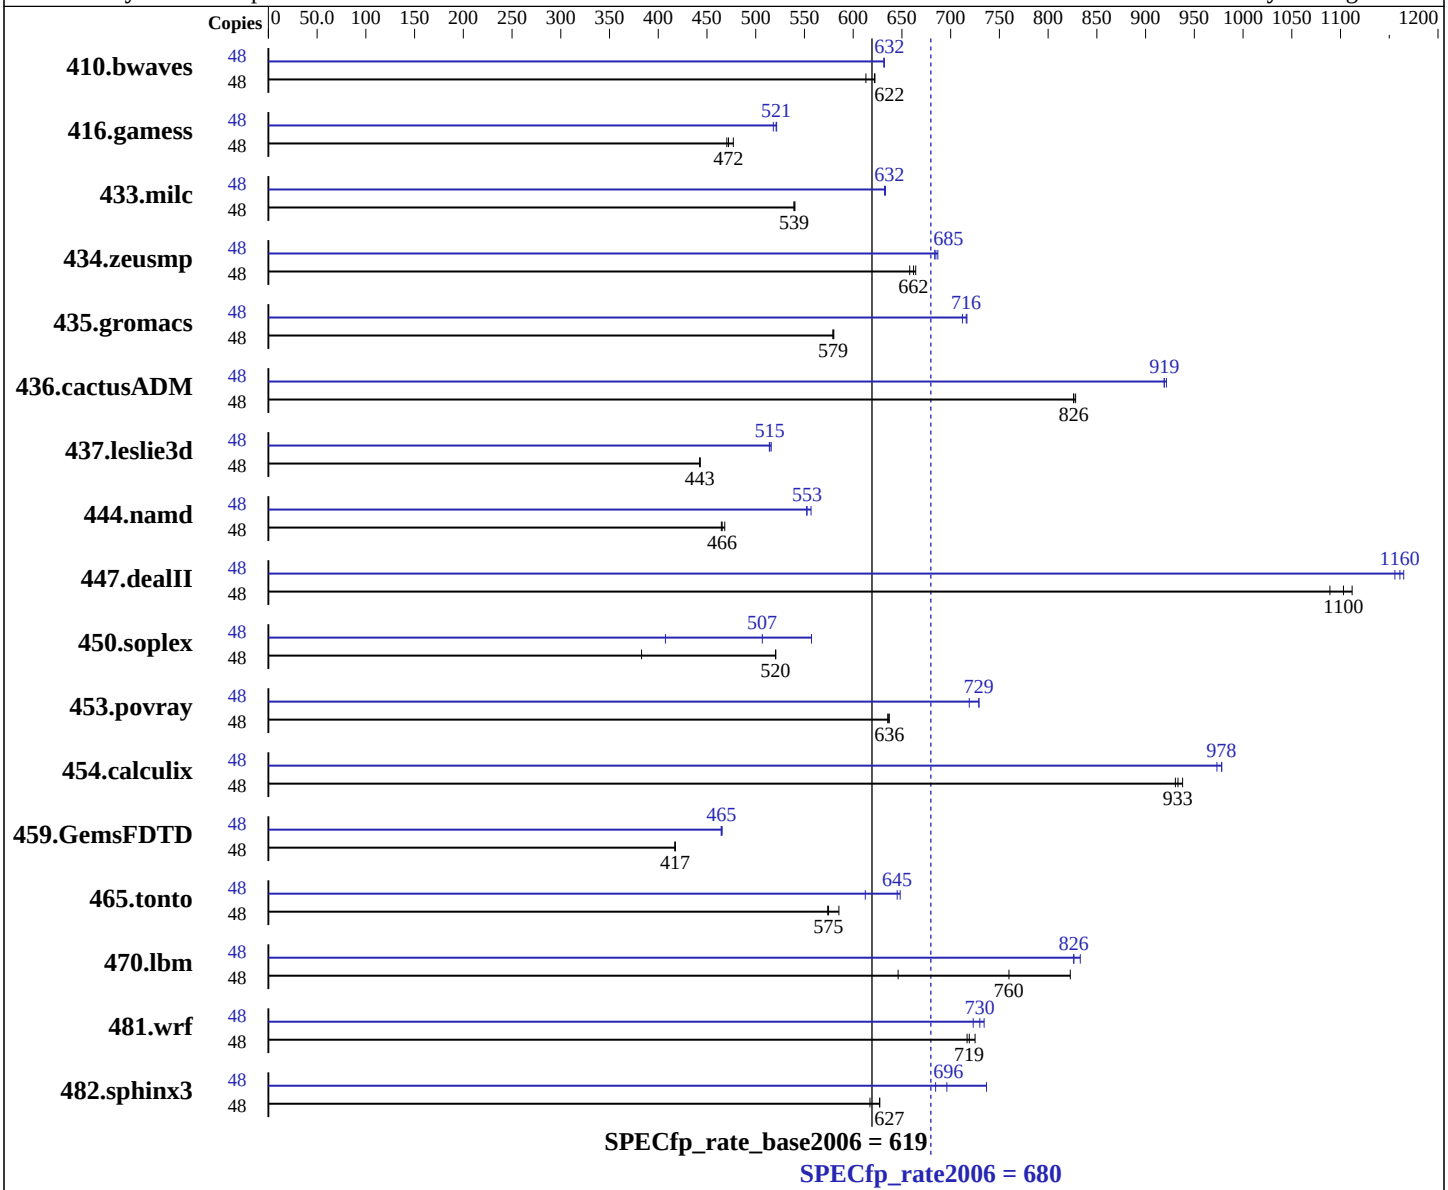

Hardware

CPU Name:	AMD Opteron 6338P
CPU Characteristics:	AMD Turbo CORE technology up to 2.80 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-4042G-6RF, (H8QG6-F, Opteron 6338P)
AMD Opteron 6338P

SPECfp_rate2006 = 680

SPECfp_rate_base2006 = 619

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	**1049**	**622**	1064	613	1048	622	48	1033	632	**1032**	**632**	1032	632
416.gamess	48	**1991**	**472**	1998	470	1970	477	48	**1804**	**521**	1814	518	1802	521
433.milc	48	**817**	**539**	816	540	817	539	48	696	633	697	632	**697**	**632**
434.zeusmp	48	664	658	658	664	**660**	**662**	48	639	684	636	687	**638**	**685**
435.gromacs	48	**591**	**579**	592	579	591	580	48	481	712	**479**	**716**	478	717
436.cactusADM	48	**694**	**826**	694	826	693	828	48	623	921	624	919	**624**	**919**
437.leslie3d	48	**1019**	**443**	1018	443	1020	443	48	**877**	**515**	878	514	875	516
444.namd	48	828	465	**827**	**466**	822	468	48	**697**	**553**	697	552	691	557
447.dealII	48	**498**	**1100**	494	1110	504	1090	48	**473**	**1160**	475	1160	471	1160
450.soplex	48	1046	383	769	521	**769**	**520**	48	983	407	**790**	**507**	718	557
453.povray	48	402	635	**401**	**636**	401	637	48	**350**	**729**	355	719	350	729
454.calculix	48	422	938	426	931	**424**	**933**	48	407	973	**405**	**978**	405	978
459.GemsFDTD	48	**1220**	**417**	1220	417	1221	417	48	1094	466	**1095**	**465**	1096	465
465.tonto	48	**822**	**575**	807	585	823	574	48	771	612	729	648	**732**	**645**
470.lbm	48	802	823	1021	646	**868**	**760**	48	798	826	792	833	**798**	**826**
481.wrf	48	748	717	**746**	**719**	739	725	48	741	723	730	734	**735**	**730**
482.sphinx3	48	1516	617	**1492**	**627**	1491	627	48	1367	685	1270	737	**1344**	**696**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
```

Continued on next page

Operating System Notes (Continued)

```
Set vm/nr_hugepages=43008 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
C State mode set to disabled under Processor & Clock Options in BIOS.
HPC Mode set to enabled under Processor & Clock Options in BIOS.
C1E Support set to disabled under Processor & Clock Options in BIOS.
Power Down Enable set to disabled in Memory Configuration in BIOS.
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-Ofast -OPT:unroll_size=256 -OPT:alias=disjoint -GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m -march=bdver1`

481.wrf: `-Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP -WOPT:sib=on -march=bdver1`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html
http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml
http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:11:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 February 2014.