SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp®_rate2006 = 252

SPECfp_rate_base2006 = 245

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

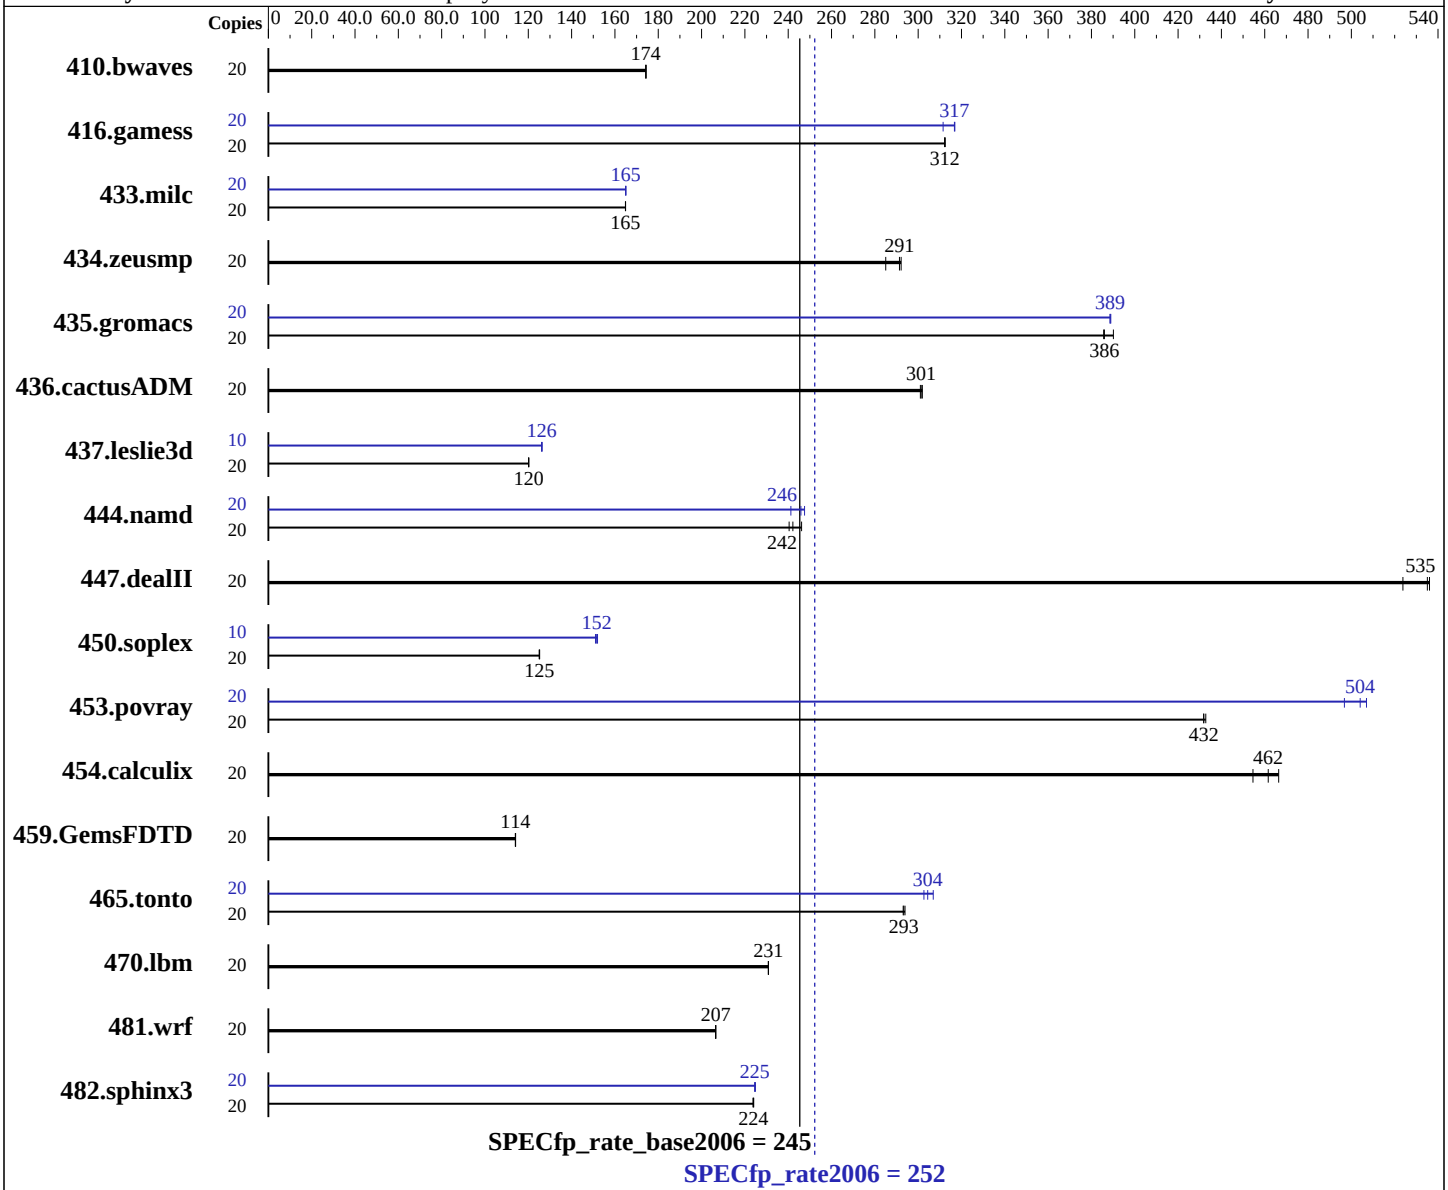

Hardware

CPU Name:	Intel Xeon E5-2470 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	10 cores, 1 chip, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP3 Kernel 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate2006 = 252

SPECfp_rate_base2006 = 245

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB 15 K SAS, RAID 1
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	20	1559	174	1560	174	**1559**	**174**	20	1559	174	1560	174	**1559**	**174**
416.gamess	20	1253	312	1254	312	**1254**	**312**	20	1236	317	**1236**	**317**	1257	312
433.milc	20	**1113**	**165**	1113	165	1114	165	20	**1113**	**165**	1113	165	1113	165
434.zeusmp	20	**625**	**291**	639	285	623	292	20	**625**	**291**	639	285	623	292
435.gromacs	20	**370**	**386**	370	386	366	390	20	**367**	**389**	367	389	367	389
436.cactusADM	20	794	301	**793**	**301**	792	302	20	794	301	**793**	**301**	792	302
437.leslie3d	20	1563	120	**1564**	**120**	1565	120	10	**745**	**126**	744	126	745	126
444.namd	20	**662**	**242**	652	246	667	240	20	648	248	665	241	**652**	**246**
447.dealII	20	437	524	427	536	**428**	**535**	20	437	524	427	536	**428**	**535**
450.soplex	20	**1332**	**125**	1334	125	1332	125	10	549	152	552	151	**550**	**152**
453.povray	20	**246**	**432**	246	433	246	432	20	210	507	214	497	**211**	**504**
454.calculix	20	354	466	363	455	**357**	**462**	20	354	466	363	455	**357**	**462**
459.GemsFDTD	20	1859	114	1861	114	**1860**	**114**	20	1859	114	1861	114	**1860**	**114**
465.tonto	20	670	294	**671**	**293**	671	293	20	**647**	**304**	650	303	641	307
470.lbm	20	**1190**	**231**	1190	231	1190	231	20	**1190**	**231**	1190	231	1190	231
481.wrf	20	**1082**	**207**	1081	207	1082	206	20	**1082**	**207**	1081	207	1082	206
482.sphinx3	20	**1741**	**224**	1742	224	1740	224	20	1736	225	1734	225	**1736**	**225**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 HP Power Regulator was set to HP Static High Performance Mode
 HP Power Profile was set to Maximum Performance
 Memory Refresh Rate was set to 1x Refresh
Sysinfo program /home/cpu2006/config/sysinfo.rev6874.hp
$Rev: 6874 $ $Date:: 2013-11-20 #$ e05b96ddac6c3d74bfe176502a0a2391
running on dl360egen8rwen Mon Jan 20 10:33:23 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2470 v2 @ 2.40GHz
      1 "physical id"s (chips)
      20 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       49260212 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 11 (x86_64)
      VERSION = 11
      PATCHLEVEL = 3

uname -a:
   Linux dl360egen8rwen 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
   (ccab990) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 19 22:08 last=S

SPEC is set to: /home/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext3  549G   27G  521G   5% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
```

Continued on next page

Platform Notes (Continued)

```
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP P73 11/12/2013
    Memory:
     6x HP 689911-071 8 GB 1600 MHz
     6x UNKNOWN NOT AVAILABLE

  (End of data from sysinfo program)
  Regarding the sysinfo display about the memory installed, the correct amount of
  memory is 48 GB and the dmidecode description should have one line reading as:
     6x HP 689911-071 8 GB 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:36:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 February 2014.