



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 60.1

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint_base2006 = 56.4

CPU2006 license: 3


Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

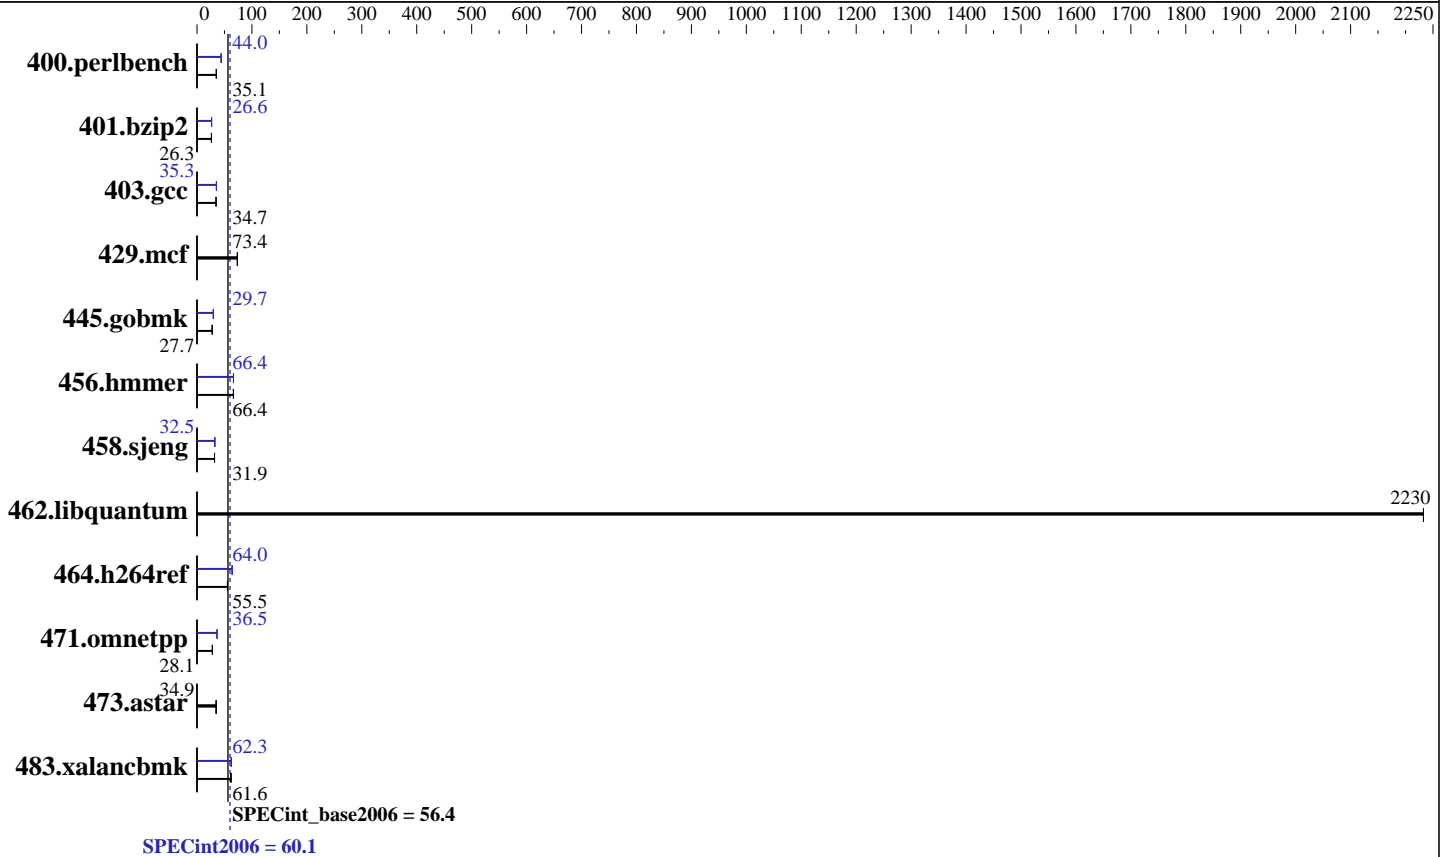

Hardware

CPU Name: Intel Xeon E5-2637 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 146 GB 15 K SAS, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
 Kernel 3.0.76-0.11-default
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **60.1**

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint_base2006 = **56.4**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	278	35.1	278	35.2	<u>278</u>	<u>35.1</u>	222	44.0	222	44.0	<u>222</u>	<u>44.0</u>
401.bzip2	367	26.3	367	26.3	<u>367</u>	<u>26.3</u>	363	26.6	363	26.6	<u>363</u>	<u>26.6</u>
403.gcc	233	34.6	232	34.8	<u>232</u>	<u>34.7</u>	228	35.3	<u>228</u>	<u>35.3</u>	228	35.3
429.mcf	124	73.6	<u>124</u>	<u>73.4</u>	124	73.3	124	73.6	<u>124</u>	<u>73.4</u>	124	73.3
445.gobmk	380	27.6	<u>379</u>	<u>27.7</u>	379	27.7	<u>353</u>	<u>29.7</u>	353	29.7	353	29.7
456.hmmr	140	66.4	141	66.1	<u>141</u>	<u>66.4</u>	140	66.4	<u>141</u>	<u>66.4</u>	141	66.4
458.sjeng	380	31.9	379	31.9	<u>379</u>	<u>31.9</u>	373	32.5	<u>373</u>	<u>32.5</u>	373	32.4
462.libquantum	9.28	2230	9.28	2230	<u>9.28</u>	<u>2230</u>	9.28	2230	9.28	2230	<u>9.28</u>	<u>2230</u>
464.h264ref	400	55.3	<u>399</u>	<u>55.5</u>	398	55.6	<u>346</u>	<u>64.0</u>	346	64.0	346	63.9
471.omnetpp	223	28.1	<u>223</u>	<u>28.1</u>	225	27.8	<u>171</u>	<u>36.5</u>	171	36.5	171	36.5
473.astar	201	34.8	<u>201</u>	<u>34.9</u>	201	34.9	201	34.8	<u>201</u>	<u>34.9</u>	201	34.9
483.xalancbmk	110	62.5	<u>112</u>	<u>61.6</u>	113	61.3	111	62.4	111	62.3	<u>111</u>	<u>62.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
Reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

```
BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Maximum Performance
Minimum Processor Idle Power Core State set to C1E
Minimum Processor Idle Power Package State set to C6 (retention)
Memory Power Savings Mode set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x
```

```
Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date: 2012-07-17 # $ e86d102572650a6e4d596a3cee98f191
running on dl380p-gen8-0s9 Tue Jan 28 20:21:17 2014
```

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 60.1

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint_base2006 = 56.4

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2637 v2 @ 3.50GHz
  2 "physical id"s (chips)
  8 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 4
    siblings  : 4
    physical 0: cores 1 2 3 4
    physical 1: cores 1 2 3 4
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      132130192 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux dl380p-gen8-0s9 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux

```

```
run-level 3 Jan 28 15:27 last=S
```

```

SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  135G   15G  120G  11% /

```

Additional information from dmidecode:

```

BIOS HP P70 12/20/2013
Memory:
16x HP 712382-071 8 GB 1866 MHz
8x UNKNOWN NOT AVAILABLE

```

(End of data from sysinfo program)
 Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:
 16x HP 712382-071 8 GB 1866 MHz



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 60.1

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint_base2006 = 56.4

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 60.1

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint_base2006 = 56.4

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 60.1

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint_base2006 = 56.4

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(3.50 GHz, Intel Xeon E5-2637 v2)

SPECint2006 = 60.1

SPECint_base2006 = 56.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:00:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 February 2014.