



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 100

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECfp_rate_base2006 = 98.3

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

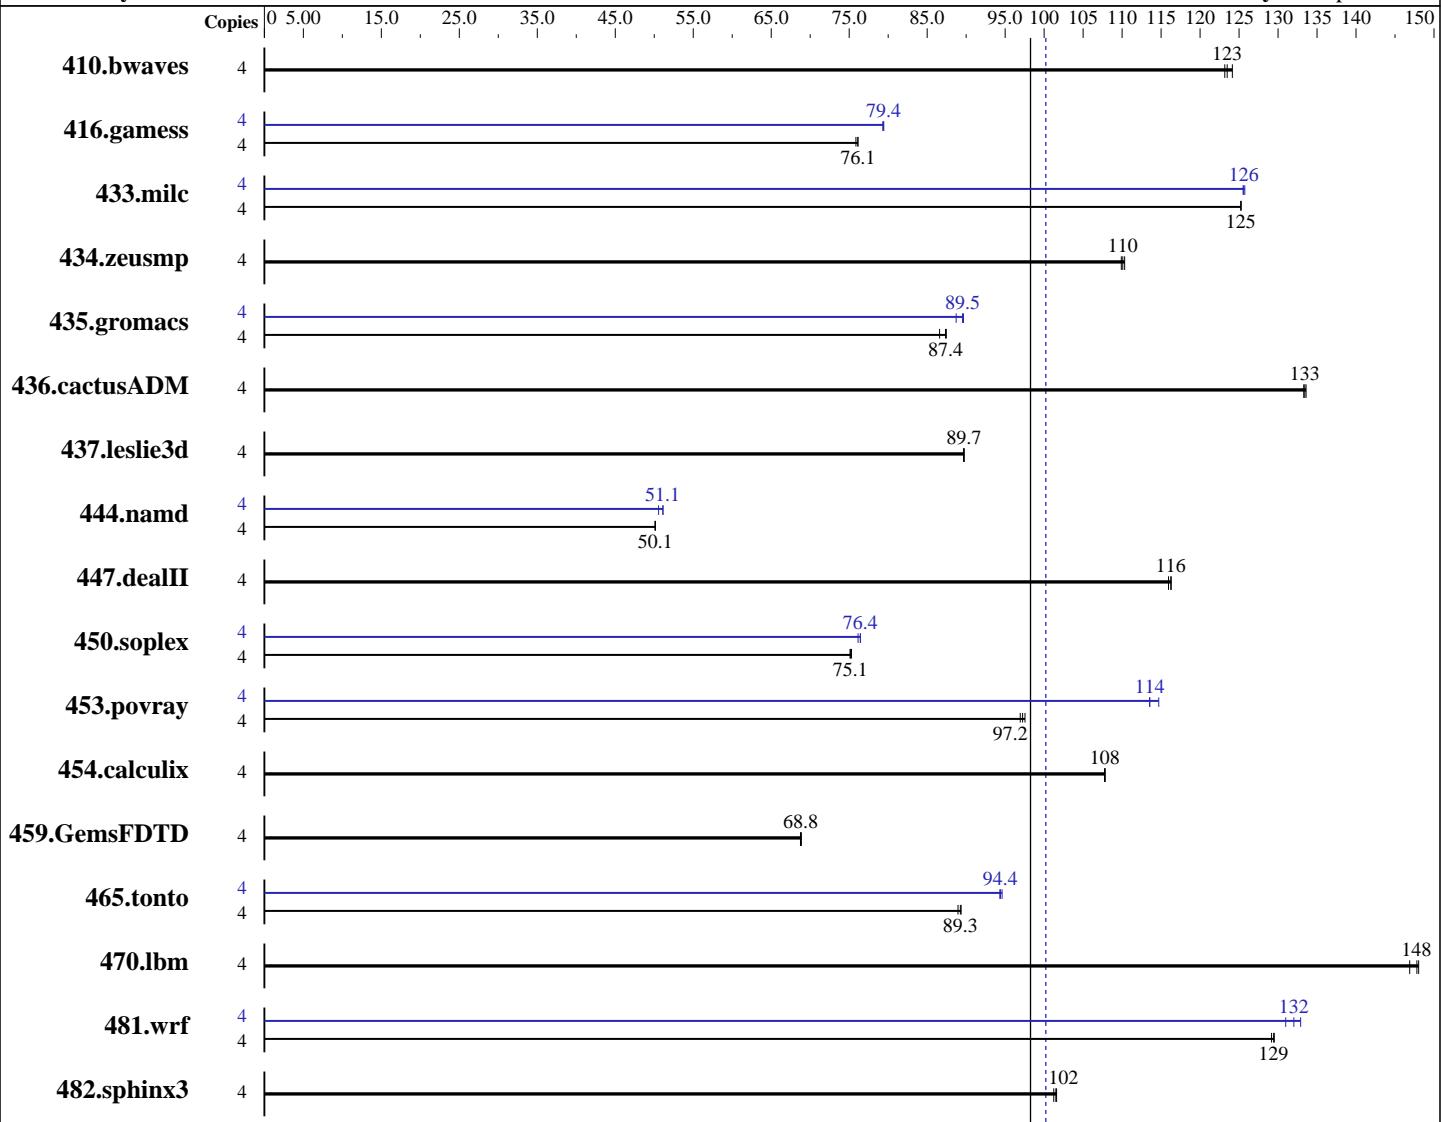

SPECfp_rate_base2006 = 98.3

SPECfp_rate2006 = 100

Hardware

CPU Name: Intel Xeon E5-2403 v2
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 100

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECfp_rate_base2006 = 98.3

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 300 GB 15000 RPM SAS
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	438	124	<u>440</u>	<u>123</u>	441	123	4	438	124	<u>440</u>	<u>123</u>	441	123
416.gamess	4	1032	75.9	<u>1029</u>	<u>76.1</u>	1029	76.1	4	<u>986</u>	<u>79.4</u>	986	79.4	988	79.3
433.milc	4	293	125	293	125	<u>293</u>	<u>125</u>	4	293	126	<u>292</u>	<u>126</u>	292	126
434.zeusmp	4	331	110	330	110	<u>331</u>	<u>110</u>	4	331	110	330	110	<u>331</u>	<u>110</u>
435.gromacs	4	327	87.5	<u>327</u>	<u>87.4</u>	330	86.6	4	319	89.7	<u>319</u>	<u>89.5</u>	322	88.7
436.cactusADM	4	<u>358</u>	<u>133</u>	358	134	359	133	4	<u>358</u>	<u>133</u>	358	134	359	133
437.leslie3d	4	419	89.7	419	89.7	<u>419</u>	<u>89.7</u>	4	419	89.7	419	89.7	<u>419</u>	<u>89.7</u>
444.namd	4	640	50.1	640	50.1	<u>640</u>	<u>50.1</u>	4	<u>628</u>	<u>51.1</u>	635	50.6	627	51.1
447.dealII	4	<u>394</u>	<u>116</u>	393	116	395	116	4	<u>394</u>	<u>116</u>	393	116	395	116
450.soplex	4	444	75.1	443	75.3	<u>444</u>	<u>75.1</u>	4	438	76.1	<u>436</u>	<u>76.4</u>	436	76.4
453.povray	4	218	97.5	<u>219</u>	<u>97.2</u>	220	96.9	4	187	114	<u>187</u>	<u>114</u>	186	115
454.calculix	4	306	108	<u>306</u>	<u>108</u>	306	108	4	306	108	<u>306</u>	<u>108</u>	306	108
459.GemsFDTD	4	616	68.9	<u>617</u>	<u>68.8</u>	617	68.8	4	616	68.9	<u>617</u>	<u>68.8</u>	617	68.8
465.tonto	4	<u>441</u>	<u>89.3</u>	440	89.4	442	89.0	4	417	94.3	<u>417</u>	<u>94.4</u>	416	94.6
470.lbm	4	371	148	374	147	<u>372</u>	<u>148</u>	4	371	148	374	147	<u>372</u>	<u>148</u>
481.wrf	4	<u>345</u>	<u>129</u>	345	130	346	129	4	336	133	<u>338</u>	<u>132</u>	341	131
482.sphinx3	4	767	102	<u>768</u>	<u>102</u>	770	101	4	<u>767</u>	102	<u>768</u>	<u>102</u>	770	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Virtualization Technology disabled
 Execute Disable disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECfp_rate2006 = 100

SPECfp_rate_base2006 = 98.3

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Platform Notes (Continued)

```
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on root Wed Nov  6 20:02:35 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2403 v2 @ 1.80GHz
        1 "physical id"s (chips)
        4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      98991332 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux root 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 6 09:26
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  271G   14G  244G   6%  /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 2.0.21 09/23/2013
Memory:
6x 00AD00B300AD HMT42GR7MFR4A-PB 16 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

SPECfp_rate2006 = 100

SPECfp_rate_base2006 = 98.3

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECfp_rate2006 = 100

SPECfp_rate_base2006 = 98.3

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECfp_rate2006 = 100

SPECfp_rate_base2006 = 98.3

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T320 (Intel Xeon E5-2403 v2, 1.80 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

SPECfp_rate2006 = 100

SPECfp_rate_base2006 = 98.3

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:07:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 February 2014.