SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M1, Intel Xeon E5-2420 v2, 2.20 GHz

SPECfp®_rate2006 = 185

SPECfp_rate_base2006 = 180

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

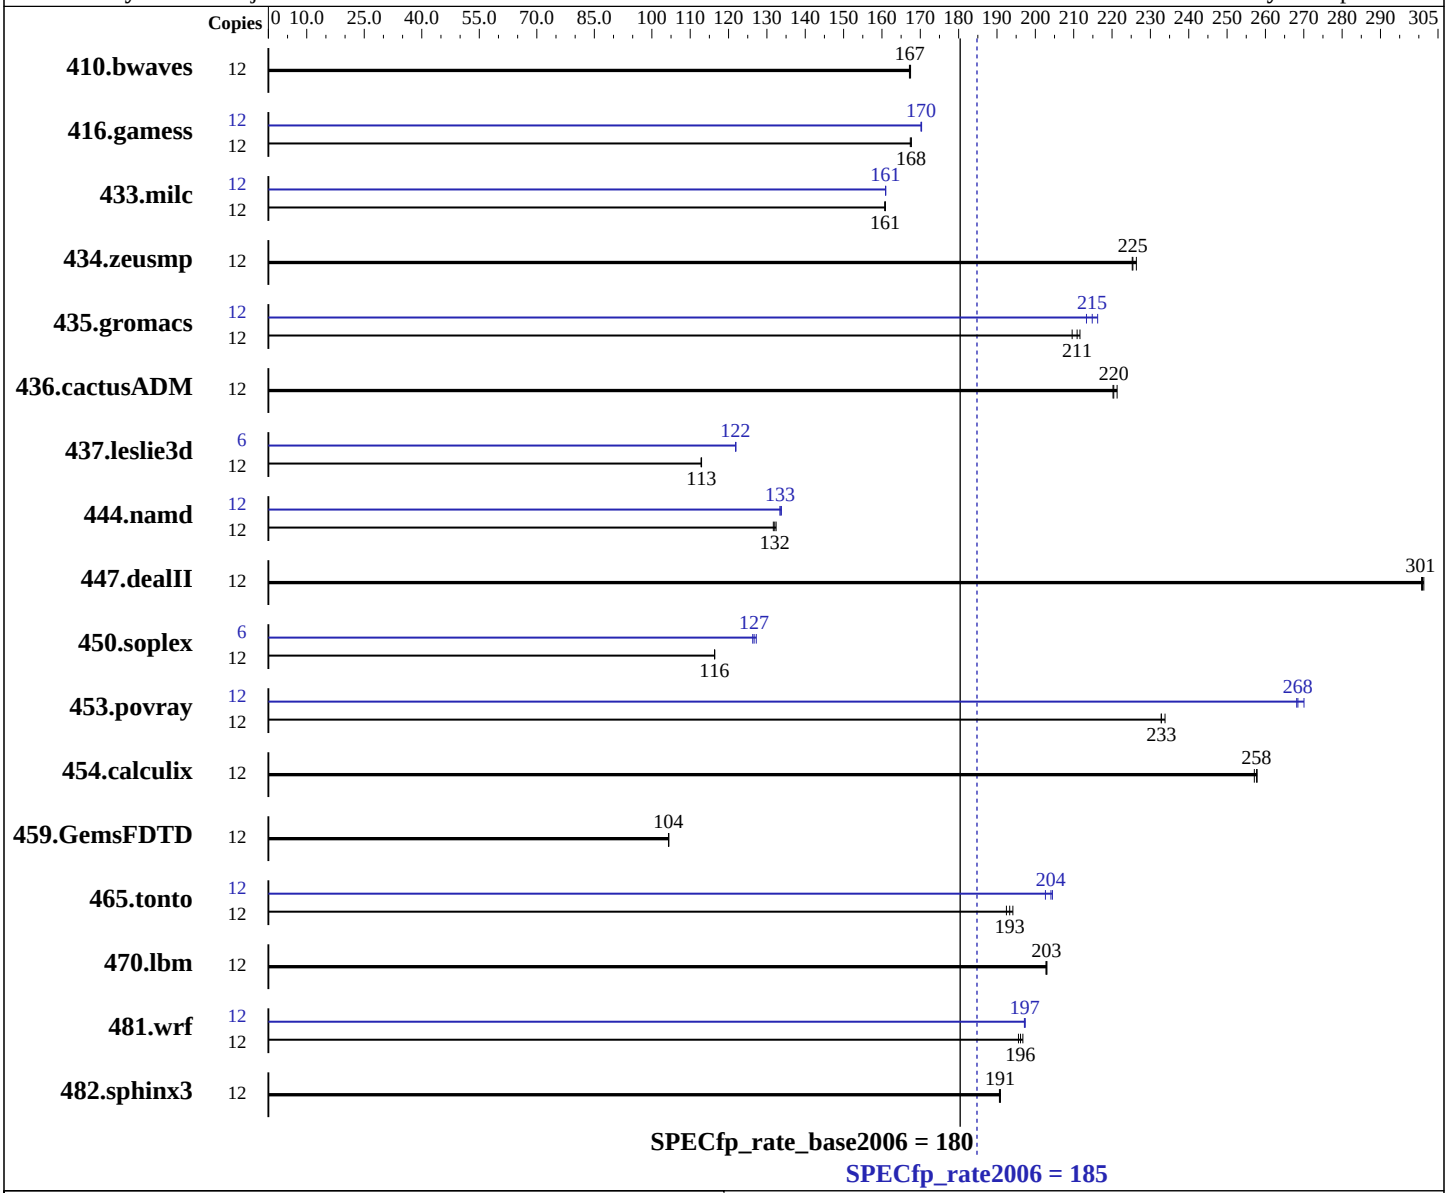

Hardware

CPU Name:	Intel Xeon E5-2420 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.11.1.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M1, Intel Xeon E5-2420 v2, 2.20 GHz

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 180

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (6 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 5 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	976	167	**975**	**167**	974	167	12	976	167	**975**	**167**	974	167
416.gamess	12	1401	168	1404	167	**1402**	**168**	12	1379	170	1380	170	**1380**	**170**
433.milc	12	685	161	685	161	**685**	**161**	12	684	161	684	161	**684**	**161**
434.zeusmp	12	485	225	**484**	**225**	482	226	12	485	225	**484**	**225**	482	226
435.gromacs	12	409	210	**406**	**211**	405	212	12	402	213	**399**	**215**	396	216
436.cactusADM	12	648	221	651	220	**650**	**220**	12	648	221	651	220	**650**	**220**
437.leslie3d	12	999	113	**999**	**113**	1000	113	6	**463**	**122**	463	122	463	122
444.namd	12	731	132	727	132	**729**	**132**	12	719	134	**721**	**133**	721	133
447.dealII	12	457	301	456	301	**456**	**301**	12	457	301	456	301	**456**	**301**
450.soplex	12	860	116	**860**	**116**	860	116	6	396	126	393	127	**395**	**127**
453.povray	12	273	234	**274**	**233**	274	233	12	238	268	236	270	**238**	**268**
454.calculix	12	384	258	**384**	**258**	385	257	12	384	258	**384**	**258**	385	257
459.GemsFDTD	12	1219	104	**1220**	**104**	1220	104	12	1219	104	**1220**	**104**	1220	104
465.tonto	12	608	194	**611**	**193**	614	192	12	**579**	**204**	578	204	583	203
470.lbm	12	812	203	**812**	**203**	813	203	12	812	203	**812**	**203**	813	203
481.wrf	12	681	197	**683**	**196**	685	196	12	**680**	**197**	680	197	679	197
482.sphinx3	12	**1226**	**191**	1227	191	1225	191	12	**1226**	**191**	1227	191	1225	191

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Energy Performance = Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks (except as noted below):
```
icpc  -m64
```

450.soplex: `icpc -m32`

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:35:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.