SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1270 v3, 3.50 GHz)

SPECfp®_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

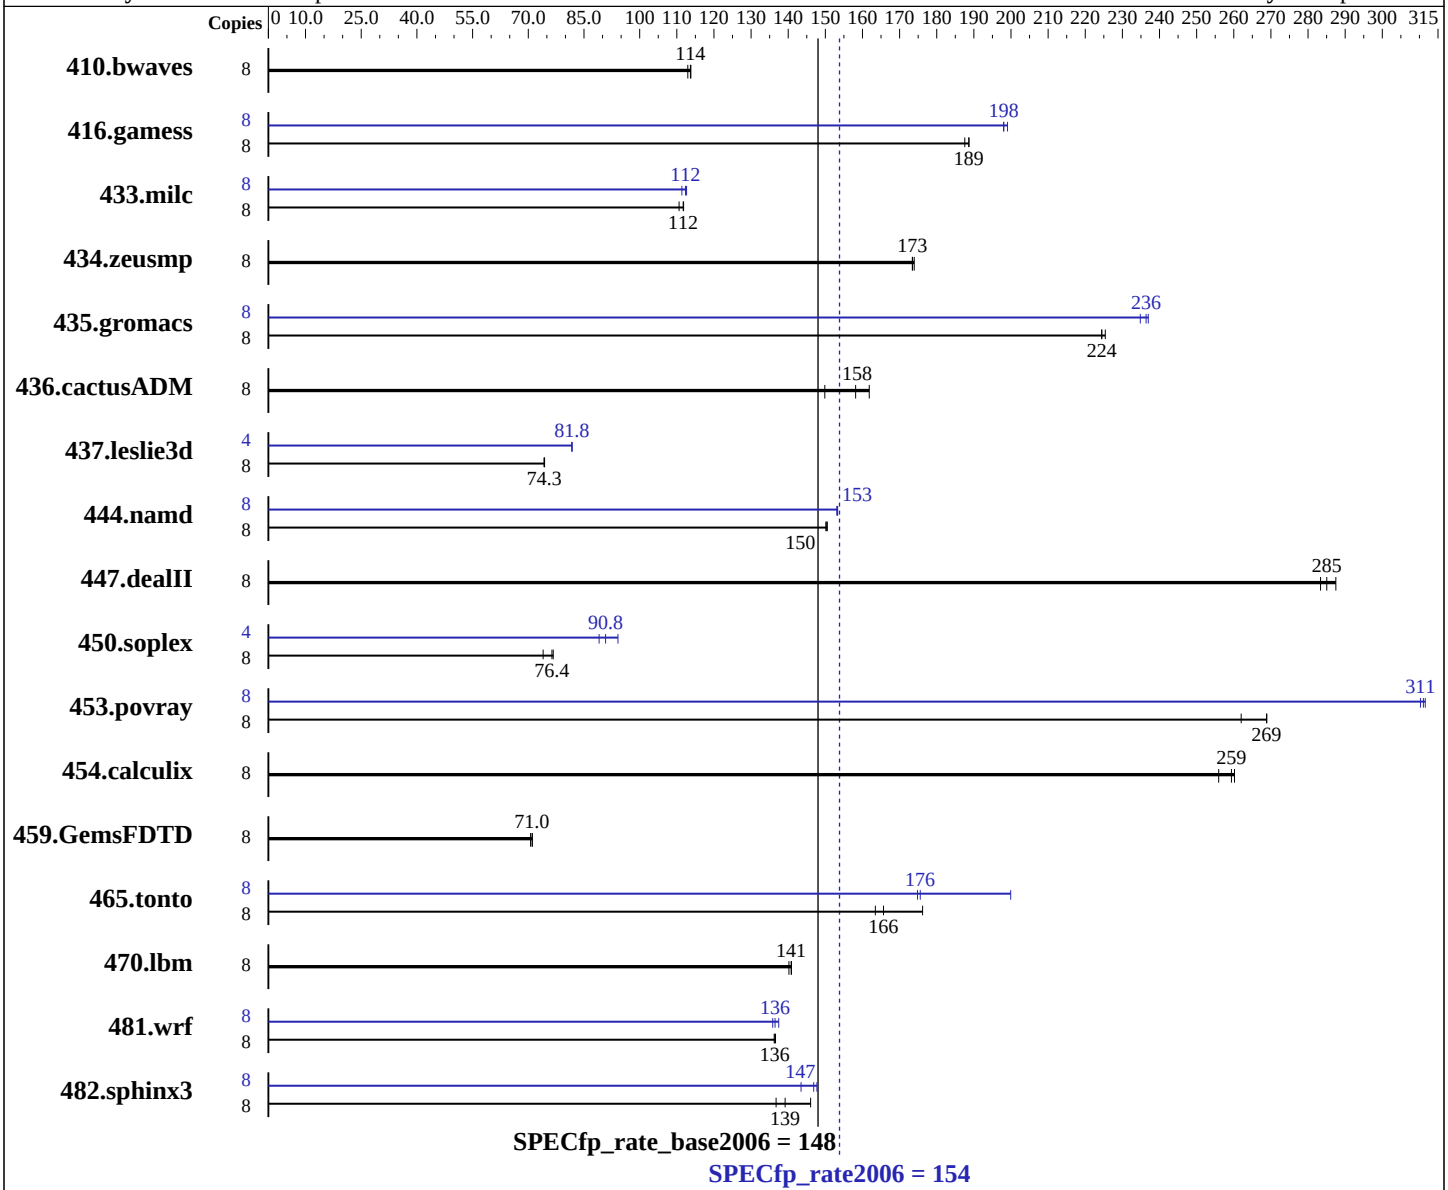

Hardware

CPU Name:	Intel Xeon E3-1270 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1270 v3, 3.50 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	962	113	955	114	**956**	**114**	8	962	113	955	114	**956**	**114**
416.gamess	8	**830**	**189**	830	189	835	188	8	**791**	**198**	787	199	791	198
433.milc	8	**657**	**112**	664	111	657	112	8	652	113	**654**	**112**	659	111
434.zeusmp	8	**420**	**173**	419	174	420	173	8	**420**	**173**	419	174	420	173
435.gromacs	8	253	225	**254**	**224**	255	224	8	241	237	**242**	**236**	243	235
436.cactusADM	8	**604**	**158**	591	162	638	150	8	**604**	**158**	591	162	638	150
437.leslie3d	8	**1012**	**74.3**	1011	74.4	1013	74.3	4	460	81.8	460	81.7	**460**	**81.8**
444.namd	8	426	151	**427**	**150**	427	150	8	419	153	**419**	**153**	418	153
447.dealII	8	**321**	**285**	318	287	323	283	8	**321**	**285**	318	287	323	283
450.soplex	8	**874**	**76.4**	902	74.0	870	76.7	4	375	89.1	**367**	**90.8**	354	94.2
453.povray	8	**158**	**269**	158	269	162	262	8	137	312	**137**	**311**	137	310
454.calculix	8	254	260	258	256	**254**	**259**	8	254	260	258	256	**254**	**259**
459.GemsFDTD	8	1202	70.6	**1195**	**71.0**	1194	71.1	8	1202	70.6	**1195**	**71.0**	1194	71.1
465.tonto	8	447	176	482	163	**475**	**166**	8	**448**	**176**	450	175	394	200
470.lbm	8	784	140	**781**	**141**	780	141	8	784	140	**781**	**141**	780	141
481.wrf	8	654	137	656	136	**655**	**136**	8	**655**	**136**	658	136	650	137
482.sphinx3	8	1140	137	**1120**	**139**	1068	146	8	1055	148	1087	143	**1062**	**147**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818
```

Continued on next page

Platform Notes (Continued)

```
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on x3250M5 Wed Feb 19 00:19:54 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1270 v3 @ 3.50GHz
      1 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 8
      physical 0: cores 0 1 2 3
   cache size : 8192 KB

From /proc/meminfo
   MemTotal:       16299396 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux x3250M5 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 18 15:27

SPEC is set to: /home/SPECcpu-new
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_x3250m5-lv_home
                  ext4    852G   21G  788G   3% /home

Additional information from dmidecode:
  BIOS IBM -[JUE109OUS-1.00]- 11/20/2013
  Memory:
   2x Micron 18KSF1G72AZ-1G6E1 8 GB 1600 MHz 2 rank
   2x Not Specified Not Specified

(End of data from sysinfo program)
"Not Specified" memory information from dmidecode indicates unused DIMM slots.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Sep 22 17:22:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.