



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp®2006 = 51.8**

**SPECfp\_base2006 = 51.3**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

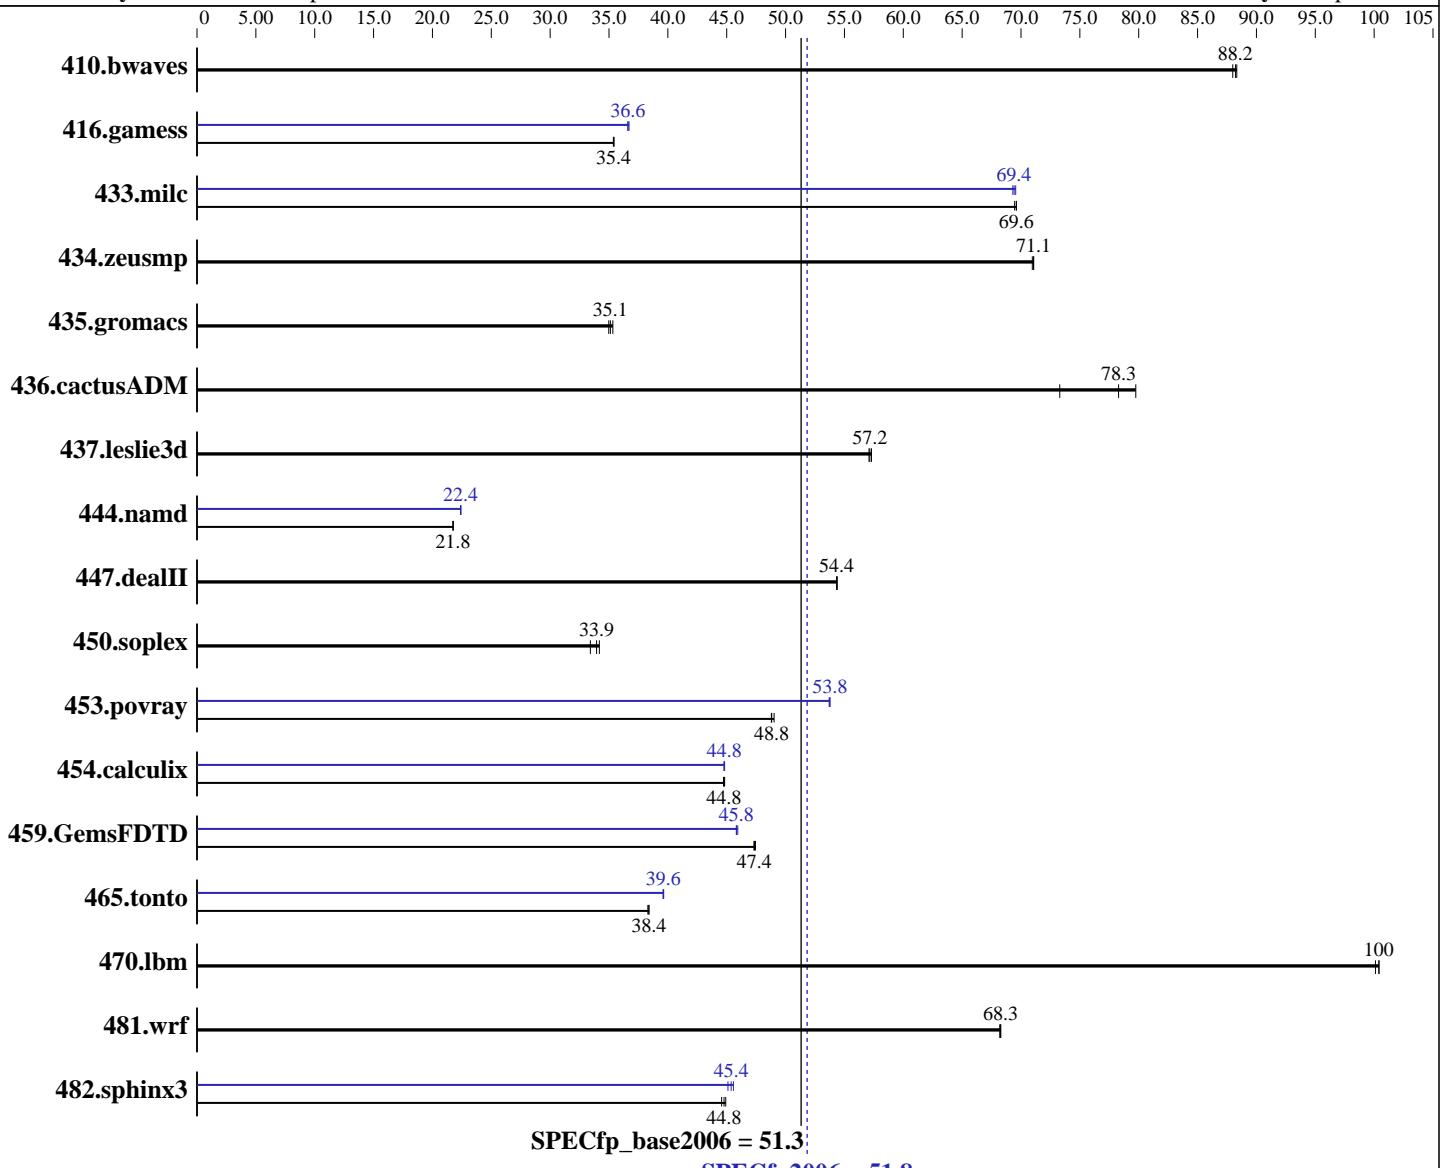

Hardware		Software	
CPU Name:	Intel Pentium G3220	Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago)
CPU Characteristics:	3000		2.6.32-358.el6.x86_64
CPU MHz:	3000	Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
FPU:	Integrated		Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip	Auto Parallel:	Yes
CPU(s) orderable:	1 chip	File System:	ext4
Primary Cache:	32 KB I + 32 KB D on chip per core	<b>Continued on next page</b>	
Secondary Cache:	256 KB I+D on chip per core		

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp2006 = 51.8**

**SPECfp\_base2006 = 51.3**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC, running at 1333 MHz)  
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	154	88.0	<u>154</u>	<u>88.2</u>	154	88.3	154	88.0	<u>154</u>	<u>88.2</u>	154	88.3
416.gamess	553	35.4	<u>553</u>	<u>35.4</u>	554	35.4	535	36.6	533	36.7	<u>535</u>	<u>36.6</u>
433.milc	132	69.6	132	69.5	<u>132</u>	<u>69.6</u>	132	69.5	<u>132</u>	<u>69.4</u>	132	69.3
434.zeusmp	128	71.0	<u>128</u>	<u>71.1</u>	128	71.1	128	71.0	<u>128</u>	<u>71.1</u>	128	71.1
435.gromacs	204	35.0	202	35.3	<u>203</u>	<u>35.1</u>	204	35.0	202	35.3	<u>203</u>	<u>35.1</u>
436.cactusADM	<u>153</u>	<u>78.3</u>	163	73.3	150	79.8	<u>153</u>	<u>78.3</u>	163	73.3	150	79.8
437.leslie3d	165	57.1	164	57.3	<u>164</u>	<u>57.2</u>	165	57.1	164	57.3	<u>164</u>	<u>57.2</u>
444.namd	369	21.8	<u>369</u>	<u>21.8</u>	369	21.8	358	22.4	<u>358</u>	<u>22.4</u>	358	22.4
447.dealII	210	54.4	210	54.4	<u>210</u>	<u>54.4</u>	210	54.4	210	54.4	<u>210</u>	<u>54.4</u>
450.soplex	<u>246</u>	<u>33.9</u>	250	33.4	244	34.2	<u>246</u>	<u>33.9</u>	250	33.4	244	34.2
453.povray	109	49.0	109	48.8	<u>109</u>	<u>48.8</u>	<u>99.0</u>	<u>53.8</u>	99.1	53.7	98.9	53.8
454.calculix	<u>184</u>	<u>44.8</u>	184	44.8	184	44.7	184	44.8	184	44.8	<u>184</u>	<u>44.8</u>
459.GemsFDTD	<u>224</u>	<u>47.4</u>	224	47.4	224	47.3	<u>232</u>	<u>45.8</u>	231	45.9	232	45.8
465.tonto	256	38.4	<u>256</u>	<u>38.4</u>	257	38.3	248	39.6	<u>248</u>	<u>39.6</u>	248	39.6
470.lbm	137	100	<u>137</u>	<u>100</u>	137	100	<u>137</u>	<u>100</u>	<u>137</u>	<u>100</u>	137	100
481.wrf	164	68.2	164	68.3	<u>164</u>	<u>68.3</u>	164	68.2	164	68.3	<u>164</u>	<u>68.3</u>
482.sphinx3	434	44.9	437	44.6	<u>435</u>	<u>44.8</u>	432	45.1	428	45.6	<u>429</u>	<u>45.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191  
running on x3250M5 Mon Mar 31 12:35:12 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp2006 = 51.8**

**SPECfp\_base2006 = 51.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Pentium(R) CPU G3220 @ 3.00GHz
  1 "physical id"s (chips)
  2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 2
  siblings : 2
  physical 0: cores 0 1
cache size : 3072 KB
```

```
From /proc/meminfo
MemTotal:      16299404 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3250M5 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 31 12:14
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type  Size Used Avail Use% Mounted on
/dev/mapper/vg_x3250m5-lv_home
                  ext4   852G  14G  795G   2% /home
```

```
Additional information from dmidecode:
BIOS IBM -[JUE109OUS-1.00]- 11/20/2013
Memory:
 2x Micron 18KSF1G72AZ-1G6E1 8 GB 1333 MHz 2 rank
 2x Not Specified Not Specified
```

(End of data from sysinfo program)  
"Not Specified" memory information from dmidecode indicates unused DIMM slots.

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp2006 = 51.8**

**SPECfp\_base2006 = 51.3**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

## General Notes (Continued)

OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp2006 = 51.8**

**SPECfp\_base2006 = 51.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp2006 = 51.8**

**SPECfp\_base2006 = 51.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
               -inline-level=0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll14
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Pentium G3220, 3.00 GHz)

**SPECfp2006 = 51.8**

**SPECfp\_base2006 = 51.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Sep 22 17:45:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 April 2014.