



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECint\_rate2006 = 902**

**SPECint\_rate\_base2006 = 873**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

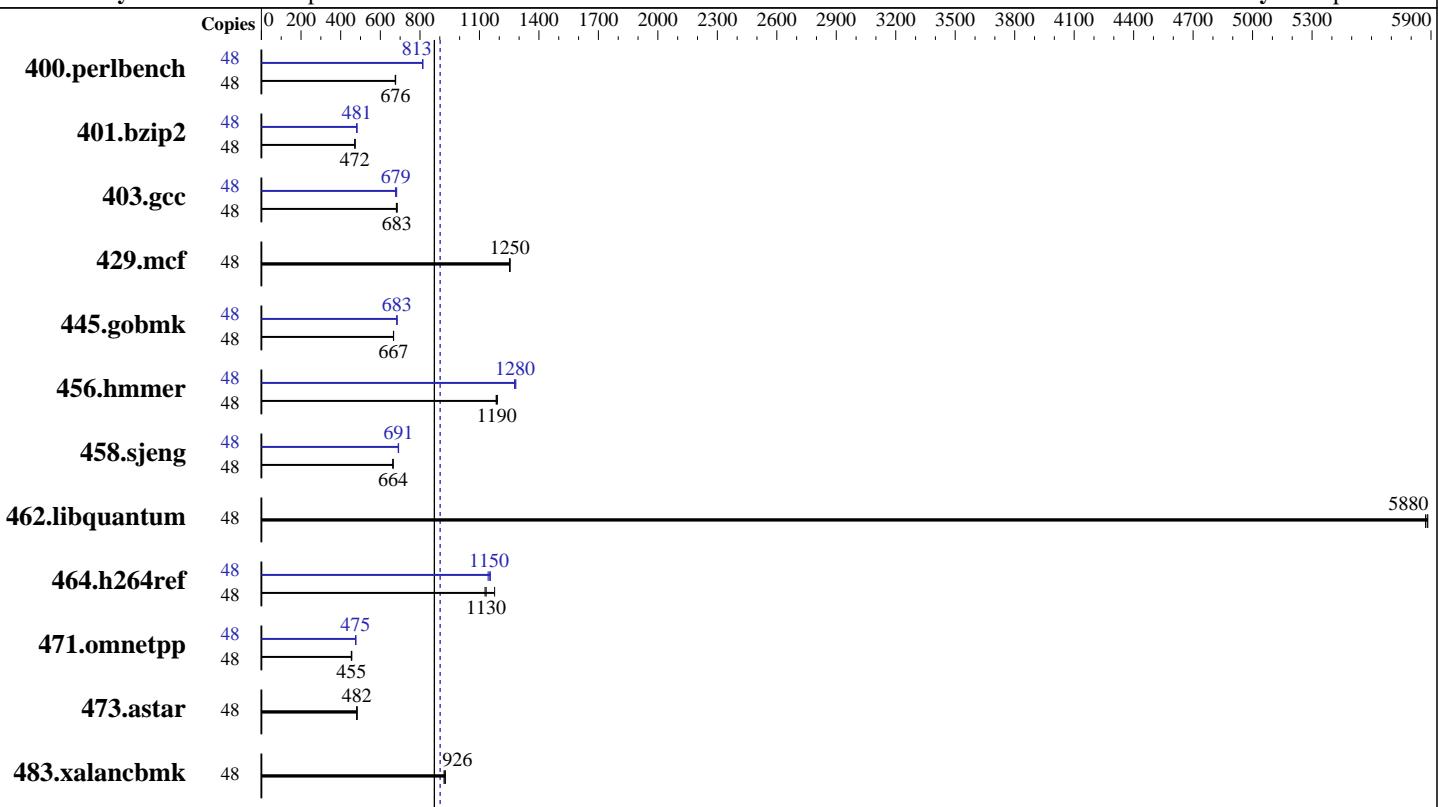

**SPECint\_rate\_base2006 = 873**

**SPECint\_rate2006 = 902**

### Hardware

CPU Name: Intel Xeon E5-2695 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 2 x 250 GB SATA, 7200RPM, RAID 0  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECint\_rate2006 = 902**

**SPECint\_rate\_base2006 = 873**

CPU2006 license: 11

Test date: Mar-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	694	675	<b>693</b>	<b>676</b>	692	677	48	<b>577</b>	<b>813</b>	575	815	<b>577</b>	813
401.bzip2	48	983	471	979	473	<b>982</b>	<b>472</b>	48	961	482	<b>962</b>	<b>481</b>	962	481
403.gcc	48	568	681	<b>566</b>	<b>683</b>	564	685	48	571	677	<b>569</b>	<b>679</b>	566	683
429.mcf	48	<b>349</b>	<b>1250</b>	349	1250	350	1250	48	<b>349</b>	<b>1250</b>	349	1250	350	1250
445.gobmk	48	755	667	756	666	<b>755</b>	<b>667</b>	48	<b>737</b>	<b>683</b>	737	683	736	684
456.hammer	48	378	1180	376	1190	<b>377</b>	<b>1190</b>	48	349	1280	351	1280	<b>350</b>	<b>1280</b>
458.sjeng	48	874	664	<b>874</b>	<b>664</b>	876	663	48	839	692	<b>840</b>	<b>691</b>	841	690
462.libquantum	48	<b>169</b>	<b>5880</b>	169	5880	169	5870	48	<b>169</b>	<b>5880</b>	169	5880	169	5870
464.h264ref	48	942	1130	<b>937</b>	<b>1130</b>	903	1180	48	<b>924</b>	<b>1150</b>	919	1160	929	1140
471.omnetpp	48	661	454	<b>659</b>	<b>455</b>	658	456	48	629	477	<b>632</b>	<b>475</b>	632	475
473.astar	48	701	481	<b>699</b>	<b>482</b>	698	483	48	701	481	<b>699</b>	<b>482</b>	698	483
483.xalancbmk	48	357	928	<b>358</b>	<b>926</b>	359	921	48	357	928	<b>358</b>	<b>926</b>	359	921

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on nx360M4 Mon Mar 17 15:53:18 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2695 v2 @ 2.40GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECint\_rate2006 = 902**

**SPECint\_rate\_base2006 = 873**

**CPU2006 license:** 11

**Test date:** Mar-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Nov-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings   : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB

From /proc/meminfo
MemTotal:      132086172 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 17 15:49

SPEC is set to: /home/SPECcpu-new
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_nx360m4-lv_home
                  ext4  403G  5.2G  378G   2%  /home

Additional information from dmidecode:
BIOS IBM -[FHE105GUS-1.00]- 08/23/2013
Memory:
 8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECint\_rate2006 = 902**

**SPECint\_rate\_base2006 = 873**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

## General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECint\_rate2006 = 902**

**SPECint\_rate\_base2006 = 873**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECint\_rate2006 = 902**

**SPECint\_rate\_base2006 = 873**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 23:30:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 April 2014.