SPEC® CFP2006 Result

Hewlett-Packard Company

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp®_rate2006 = 1140

SPECfp_rate_base2006 = 1110

CPU2006 license: 3		**Test date:**	Mar-2014
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Feb-2014
Tested by:	Hewlett-Packard Company	**Software Availability:**	Nov-2013

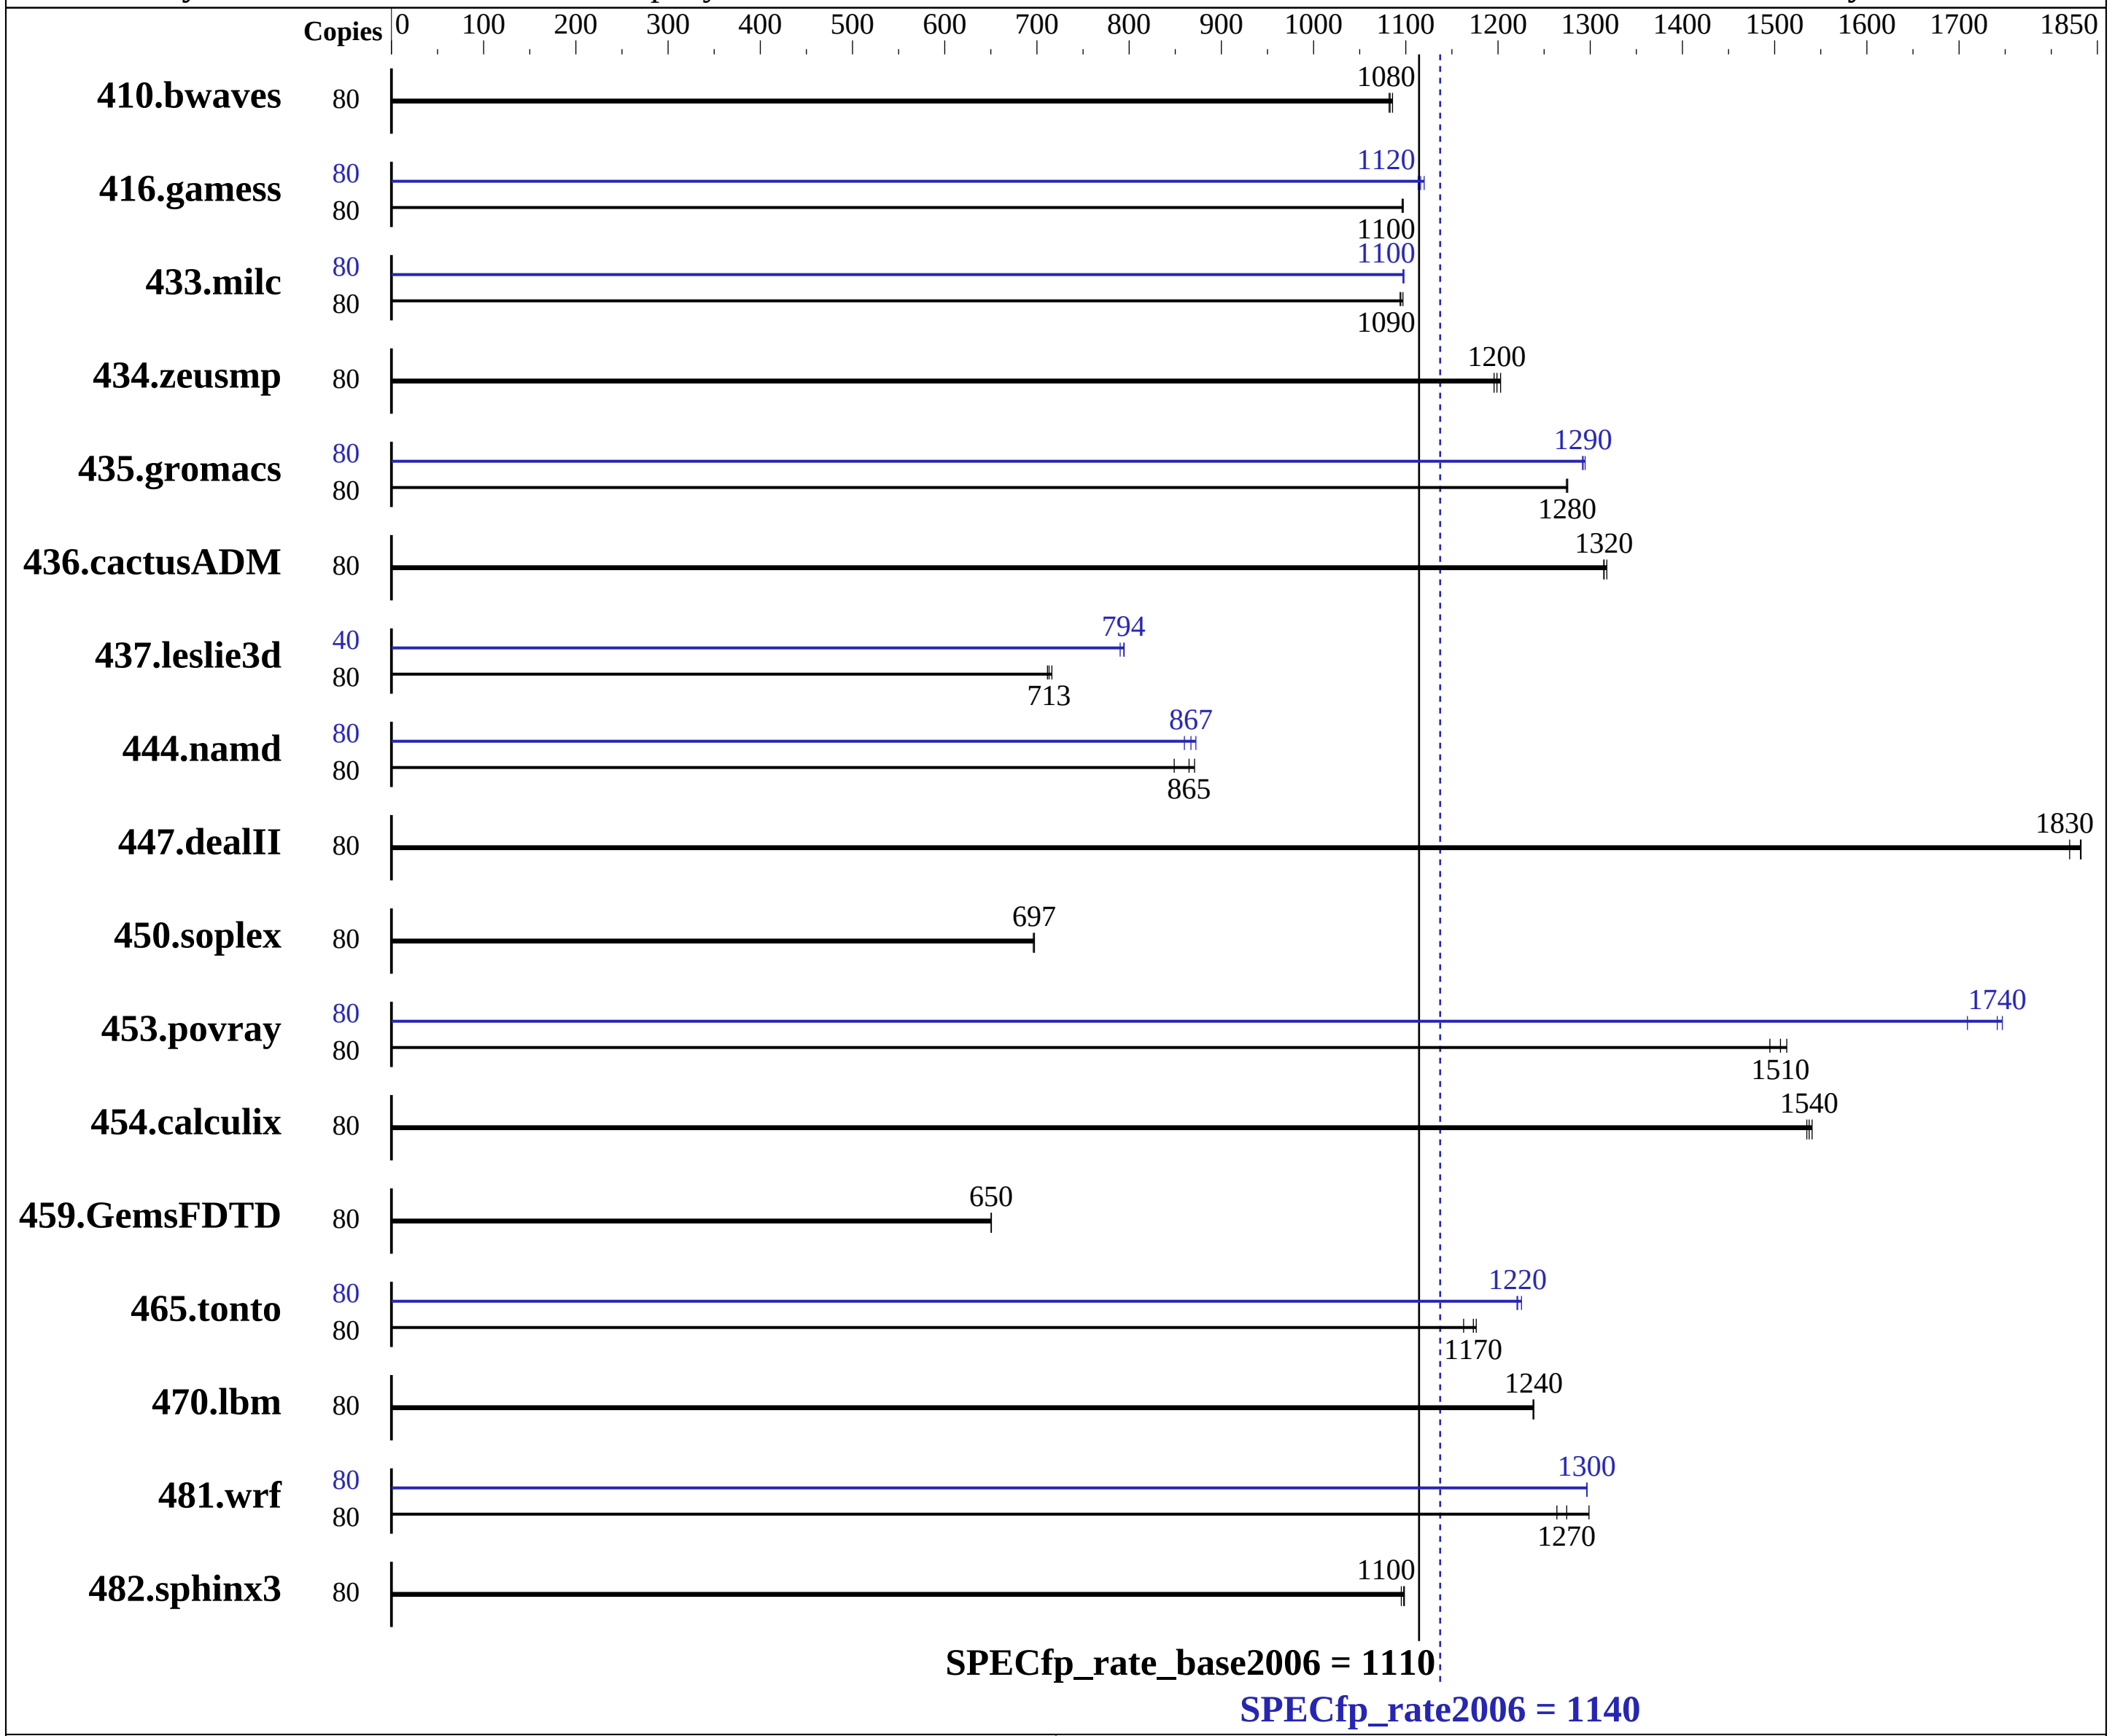

Hardware

CPU Name:	Intel Xeon E7-4830 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) Kernel 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

Hewlett-Packard Company

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp_rate2006 = 1140

SPECfp_rate_base2006 = 1110

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Mar-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)
Disk Subsystem: 1 x 400 GB SSD SAS, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1005	1080	**1004**	**1080**	1001	1090	80	1005	1080	**1004**	**1080**	1001	1090
416.gamess	80	**1429**	**1100**	1429	1100	1428	1100	80	1399	1120	**1404**	**1120**	1407	1110
433.milc	80	670	1100	**671**	**1090**	671	1090	80	669	1100	**669**	**1100**	669	1100
434.zeusmp	80	605	1200	609	1200	**607**	**1200**	80	605	1200	609	1200	**607**	**1200**
435.gromacs	80	448	1270	448	1280	**448**	**1280**	80	442	1290	**442**	**1290**	441	1290
436.cactusADM	80	727	1310	725	1320	**727**	**1320**	80	727	1310	725	1320	**727**	**1320**
437.leslie3d	80	1057	711	1050	716	**1055**	**713**	40	476	790	**473**	**794**	473	795
444.namd	80	737	871	756	849	**742**	**865**	80	735	872	**740**	**867**	746	860
447.dealII	80	499	1830	**500**	**1830**	503	1820	80	499	1830	**500**	**1830**	503	1820
450.soplex	80	**957**	**697**	959	696	957	697	80	**957**	**697**	959	696	957	697
453.povray	80	**283**	**1510**	281	1510	285	1490	80	249	1710	244	1750	**244**	**1740**
454.calculix	80	428	1540	430	1530	**429**	**1540**	80	428	1540	430	1530	**429**	**1540**
459.GemsFDTD	80	**1305**	**650**	1305	650	1305	651	80	**1305**	**650**	1305	650	1305	651
465.tonto	80	669	1180	677	1160	**671**	**1170**	80	**645**	**1220**	642	1230	645	1220
470.lbm	80	887	1240	**887**	**1240**	888	1240	80	887	1240	**887**	**1240**	888	1240
481.wrf	80	707	1260	688	1300	**701**	**1270**	80	689	1300	**689**	**1300**	689	1300
482.sphinx3	80	1424	1100	**1420**	**1100**	1419	1100	80	1424	1100	**1420**	**1100**	1419	1100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Continued on next page

Operating System Notes (Continued)

```
Disabled unused Linux services through "stop_services.sh" before running.
```

Platform Notes

```
BIOS Configuration:
 HP Power Profile set to Maximum Performance
 Collaborative Power Control set to Disabled
 Thermal Configuration set to Maximum Cooling
 Processor Power and Utilization Monitoring set to Disabled
 Memory Refresh Rate set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on Dl580-Gen8 Sat Mar  8 07:28:19 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4830 v2 @ 2.20GHz
      4 "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
      physical 2: cores 0 1 2 3 4 8 9 10 11 12
      physical 3: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       1058851616 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux Dl580-Gen8 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Mar 7 16:49

 SPEC is set to: /cpu2006
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      ext4  365G   81G  266G  24% /

 Additional information from dmidecode:
   BIOS HP P79 02/14/2014
   Memory:
    64x HP 712383-081 16 GB 1333 MHz 2 rank
    32x UNKNOWN NOT AVAILABLE

 (End of data from sysinfo program)
 Regarding the sysinfo display about the memory installed, the correct amount of
 memory is 1 TB and the dmidecode description should have one line reading as:
    64x HP 712383-081 16 GB 1333 MHz 2 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
Assuming that the memory populations rules found in the DL580 Gen8
QuickSpecs are followed, HP supports memory running at 1333 MHz on
the E7-4850 v2, E7-4830 v2, E7-4820 v2, or E7-4809 v2 processors with
any BIOS prior to the 1.03_06-27-2014 ROM. Any BIOS that is the
1.03_06-27-2014 ROM or later, does not support the memory running at
1333 MHz due to a change in the Intel MRC (Memory Reference Code).
```

Base Compiler Invocation

C benchmarks:
`icc   -m64`

C++ benchmarks:
`icpc  -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc   -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`icc   -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -inline-level=0 -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Sep 18 12:39:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 May 2014.