SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen8
(3.30 GHz, Intel Xeon E5-4627 v2)

SPECfp®_rate2006 = 1100

SPECfp_rate_base2006 = 1080

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

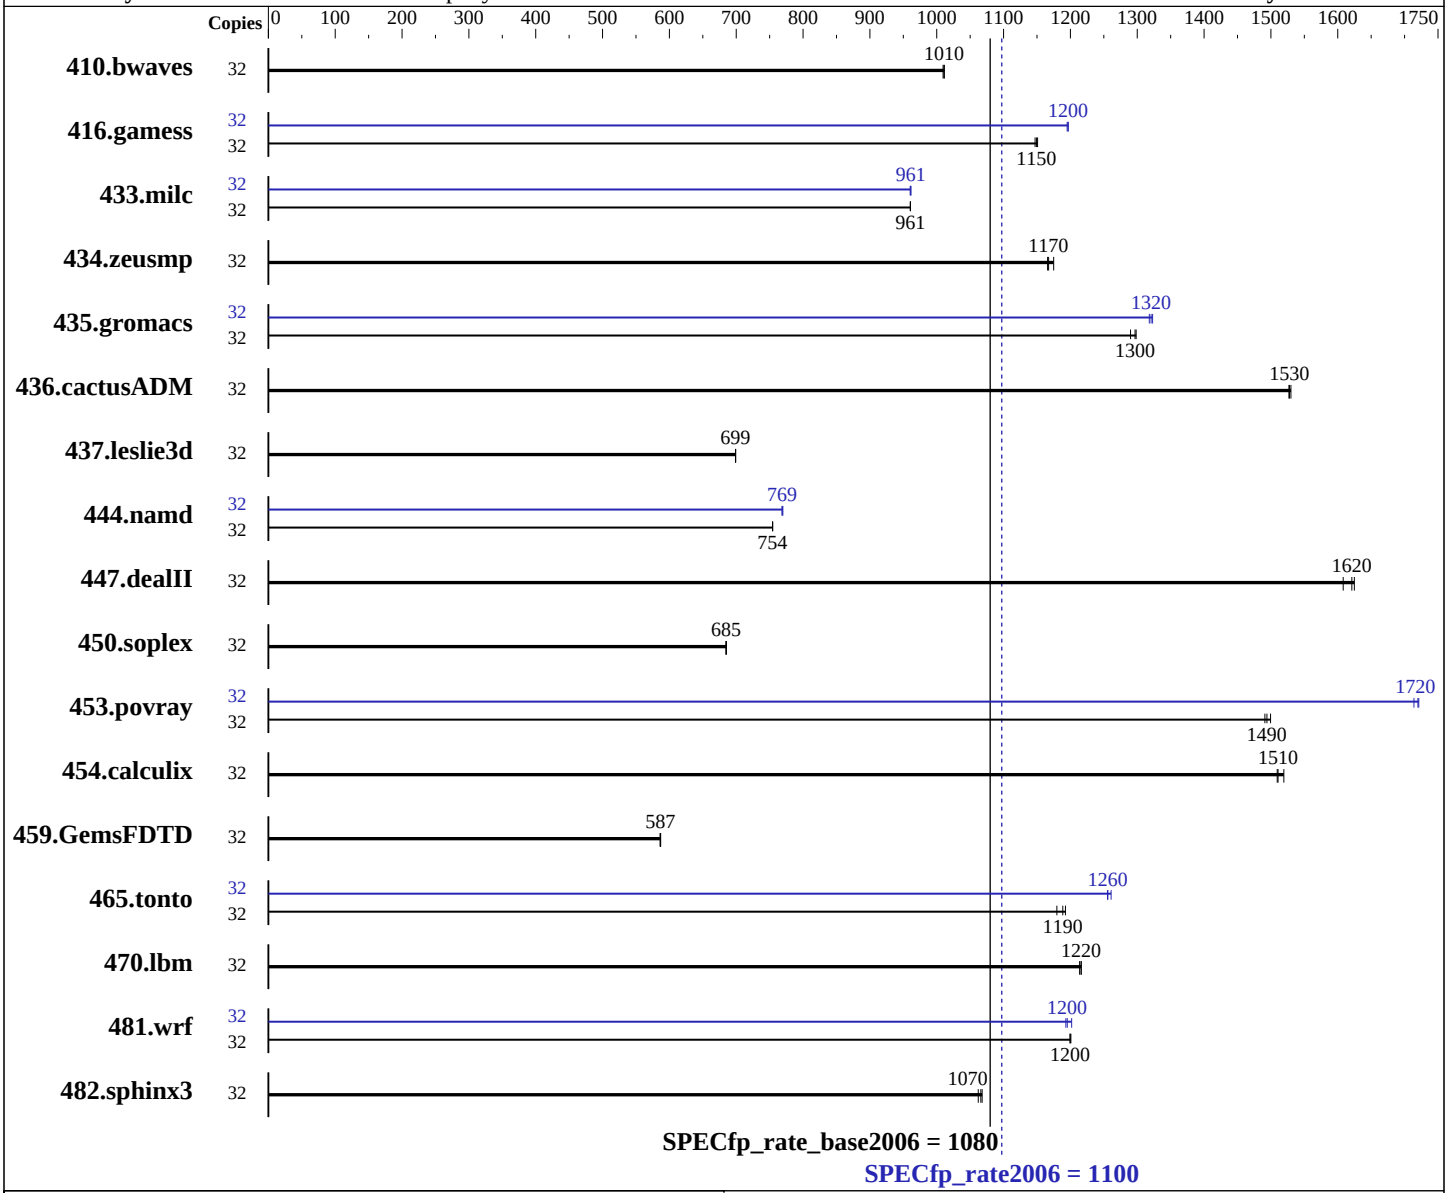

Hardware

CPU Name:	Intel Xeon E5-4627 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5, (Santiago) Kernel 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen8
(3.30 GHz, Intel Xeon E5-4627 v2)

SPECfp_rate2006 = 1100

SPECfp_rate_base2006 = 1080

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	431	1010	**430**	**1010**	430	1010	32	431	1010	**430**	**1010**	430	1010
416.gamess	32	546	1150	544	1150	**545**	**1150**	32	524	1200	524	1200	**524**	**1200**
433.milc	32	306	961	**306**	**961**	306	961	32	**306**	**961**	306	961	306	960
434.zeusmp	32	250	1170	**249**	**1170**	248	1170	32	250	1170	**249**	**1170**	248	1170
435.gromacs	32	176	1300	**176**	**1300**	177	1290	32	**173**	**1320**	173	1320	173	1320
436.cactusADM	32	**250**	**1530**	250	1530	250	1530	32	**250**	**1530**	250	1530	250	1530
437.leslie3d	32	430	699	430	699	**430**	**699**	32	430	699	430	699	**430**	**699**
444.namd	32	340	755	340	754	**340**	**754**	32	333	770	**334**	**769**	334	769
447.dealII	32	**226**	**1620**	228	1610	225	1620	32	**226**	**1620**	228	1610	225	1620
450.soplex	32	**390**	**685**	390	685	389	685	32	**390**	**685**	390	685	389	685
453.povray	32	114	1490	114	1500	**114**	**1490**	32	**99.0**	**1720**	98.9	1720	99.3	1710
454.calculix	32	174	1520	175	1510	**175**	**1510**	32	174	1520	175	1510	**175**	**1510**
459.GemsFDTD	32	**579**	**587**	579	586	578	587	32	**579**	**587**	579	586	578	587
465.tonto	32	**265**	**1190**	267	1180	264	1190	32	251	1260	250	1260	**251**	**1260**
470.lbm	32	362	1220	362	1210	**362**	**1220**	32	362	1220	362	1210	**362**	**1220**
481.wrf	32	**298**	**1200**	298	1200	298	1200	32	297	1200	**299**	**1200**	300	1190
482.sphinx3	32	**585**	**1070**	584	1070	587	1060	32	**585**	**1070**	584	1070	587	1060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 HP Power Profile set to Maximum Performance
 Memory Power Savings Mode set to Maximum Performance
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Dynamic Power Capping Functionality set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on DL560p-Gen8-1K4 Thu Apr 10 05:12:12 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4627 v2 @ 3.30GHz
      4 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
      physical 2: cores 0 1 2 3 4 5 6 7
      physical 3: cores 0 1 2 3 4 5 6 7
   cache size : 16384 KB

From /proc/meminfo
   MemTotal:       529267592 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux DL560p-Gen8-1K4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
   2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 9 17:40

SPEC is set to: /cpu2006
```

Continued on next page

Platform Notes (Continued)

```
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda3      ext4  365G  216G  131G  63% /

  Additional information from dmidecode:
    BIOS HP P77 11/14/2013
    Memory:
     32x HP 712383-081 16 GB 1866 MHz 2 rank
     16x UNKNOWN NOT AVAILABLE

  (End of data from sysinfo program)
  Regarding the sysinfo display about the memory installed, the correct amount of
  memory is 512 GB and the dmidecode description should have one line reading as:
     32x HP 712383-081 16 GB 1866 MHz 2 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `-xAVX -ipo -O3 -no-prec-div -auto-ilp32`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:05:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 May 2014.