



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp<sup>®</sup>\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Mar-2014

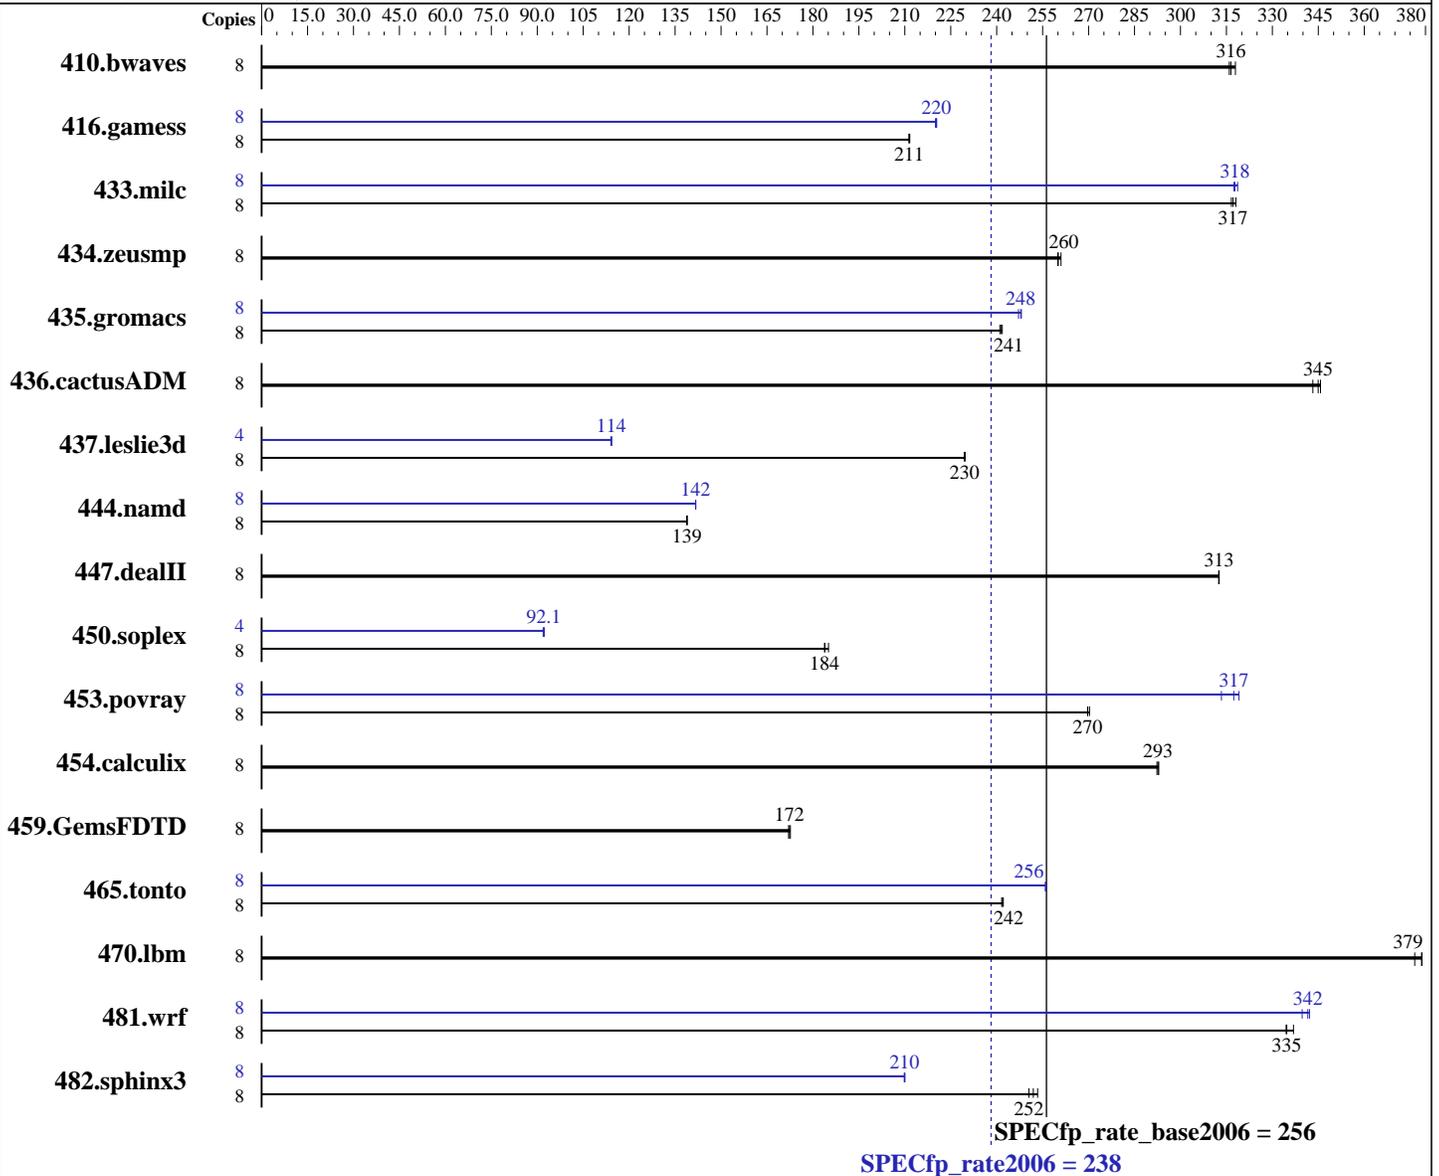

### Hardware

CPU Name: Intel Xeon E5-2609 v2  
 CPU Characteristics:  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Mar-2014

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL7)  
Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	344	316	342	318	<b>344</b>	<b>316</b>	8	344	316	342	318	<b>344</b>	<b>316</b>
416.gamess	8	<b>741</b>	<b>211</b>	740	212	741	211	8	712	220	711	220	<b>711</b>	<b>220</b>
433.milc	8	<b>232</b>	<b>317</b>	232	317	231	318	8	<b>231</b>	<b>318</b>	231	317	230	319
434.zeusmp	8	279	261	<b>280</b>	<b>260</b>	280	260	8	279	261	<b>280</b>	<b>260</b>	280	260
435.gromacs	8	237	241	<b>237</b>	<b>241</b>	236	242	8	<b>230</b>	<b>248</b>	231	247	230	248
436.cactusADM	8	<b>277</b>	<b>345</b>	277	346	279	343	8	<b>277</b>	<b>345</b>	277	346	279	343
437.leslie3d	8	327	230	328	229	<b>328</b>	<b>230</b>	4	<b>329</b>	<b>114</b>	330	114	329	114
444.namd	8	462	139	462	139	<b>462</b>	<b>139</b>	8	453	142	<b>453</b>	<b>142</b>	453	142
447.dealII	8	293	313	<b>293</b>	<b>313</b>	293	313	8	293	313	<b>293</b>	<b>313</b>	293	313
450.soplex	8	360	185	363	184	<b>363</b>	<b>184</b>	4	<b>362</b>	<b>92.1</b>	363	91.9	361	92.3
453.povray	8	<b>158</b>	<b>270</b>	157	270	158	270	8	<b>134</b>	<b>317</b>	136	313	133	319
454.calculix	8	226	292	225	293	<b>226</b>	<b>293</b>	8	226	292	225	293	<b>226</b>	<b>293</b>
459.GemsFDTD	8	493	172	<b>492</b>	<b>172</b>	492	173	8	493	172	<b>492</b>	<b>172</b>	492	173
465.tonto	8	325	242	326	242	<b>325</b>	<b>242</b>	8	<b>307</b>	<b>256</b>	308	256	307	256
470.lbm	8	290	379	<b>290</b>	<b>379</b>	292	376	8	290	379	<b>290</b>	<b>379</b>	292	376
481.wrf	8	<b>267</b>	<b>335</b>	265	337	267	334	8	263	340	<b>262</b>	<b>342</b>	261	342
482.sphinx3	8	622	251	<b>619</b>	<b>252</b>	615	253	8	742	210	<b>743</b>	<b>210</b>	743	210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Mar-2014

### Platform Notes

CPU performance set to HPC  
 Power Technology set to Custom  
 CPU Power State C6 set to Enabled  
 CPU Power State C1 Enhanced set to Disabled  
 Memory RAS configuration set to Maximum Performance  
 DRAM Clock Throttling Set to Performance  
 Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on c240m3 Wed May 28 00:31:45 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 4
  siblings    : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size    : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132126952 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux c240m3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 May 27 16:36

```
SPEC is set to: /opt/cpu2006-1.4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  275G  11G  250G   5% /
```

Additional information from dmidecode:  
 BIOS Cisco Systems, Inc. C240M3.1.5.4h.0.031920140456 03/19/2014  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Mar-2014

## Platform Notes (Continued)

Memory:

16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1333 MHz 2 rank  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted\_by: "Sheshgiri I (shei)" <shei@cisco.com>

Submitted: Mon Jun 2 06:05:28 EDT 2014

Submission: cpu2006-20140602-29747.sub

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Mar-2014

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Mar-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 238

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Mar-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:44:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 June 2014.