



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp®_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

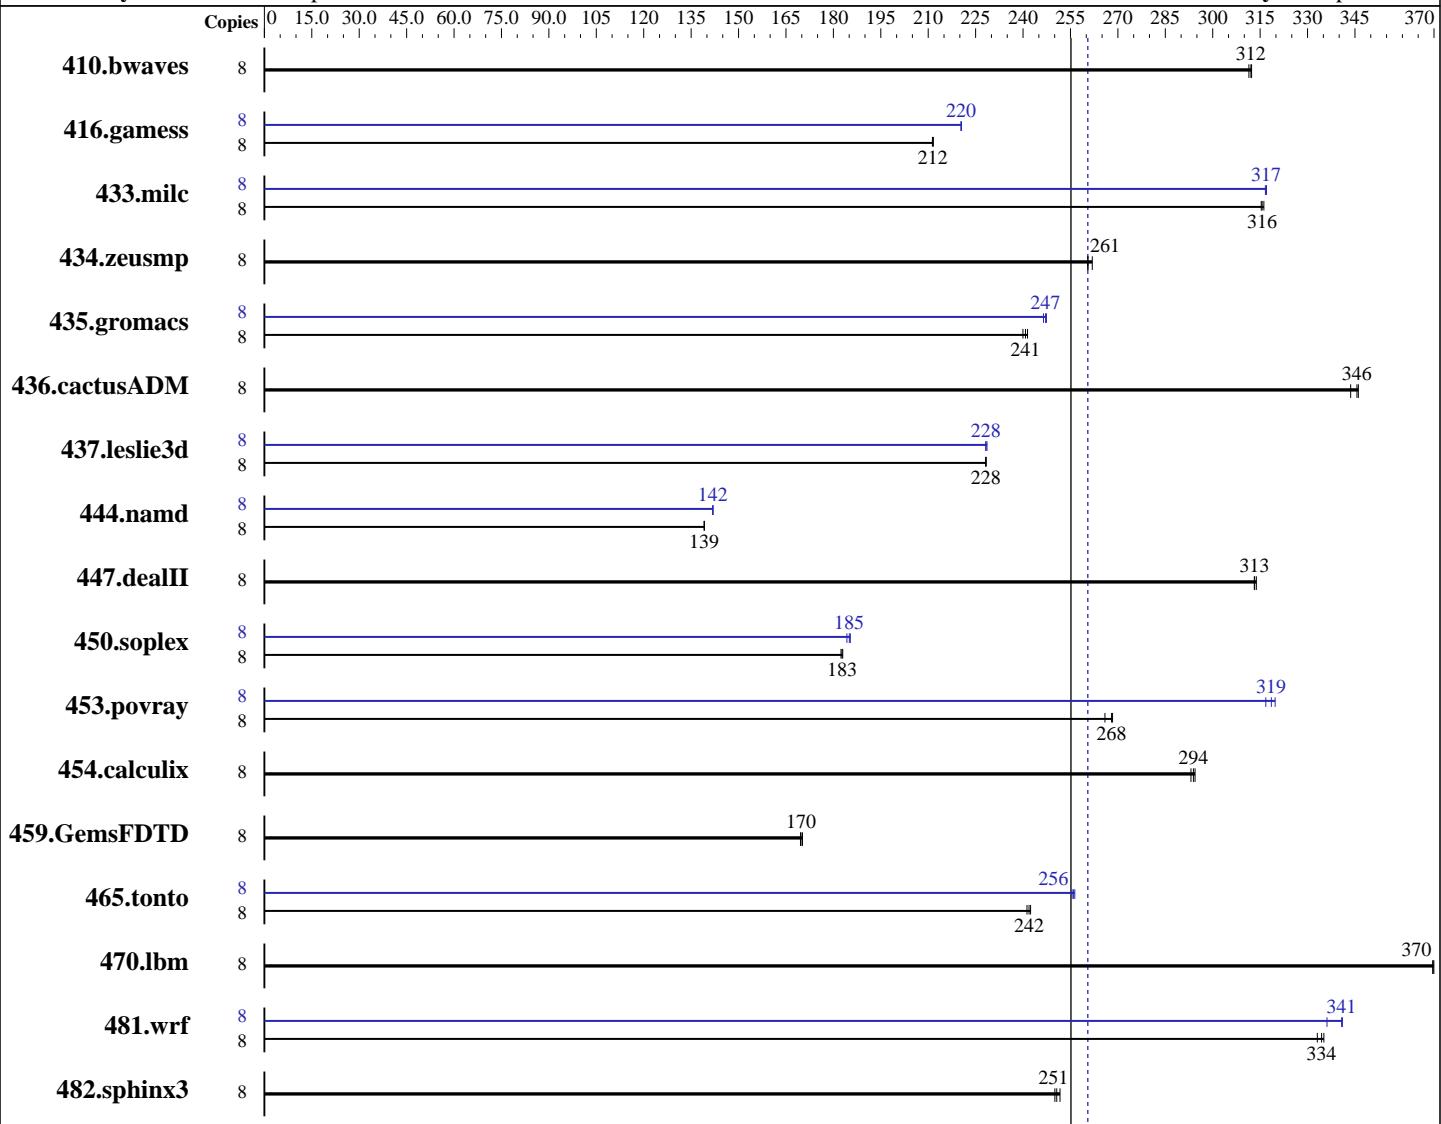

SPECfp_rate_base2006 = 255

SPECfp_rate2006 = 260

Hardware

CPU Name: Intel Xeon E5-2609 v2
CPU Characteristics:
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	348	312	<u>348</u>	<u>312</u>	349	311	8	348	312	<u>348</u>	<u>312</u>	349	311		
416.gamess	8	740	212	741	211	<u>741</u>	<u>212</u>	8	711	220	710	220	<u>710</u>	<u>220</u>		
433.milc	8	233	315	<u>233</u>	<u>316</u>	232	316	8	232	317	<u>232</u>	<u>317</u>	232	317		
434.zeusmp	8	278	262	<u>279</u>	<u>261</u>	280	260	8	278	262	<u>279</u>	<u>261</u>	280	260		
435.gromacs	8	<u>237</u>	<u>241</u>	237	241	238	240	8	<u>231</u>	<u>247</u>	231	247	232	246		
436.cactusADM	8	276	346	<u>277</u>	<u>346</u>	278	344	8	276	346	<u>277</u>	<u>346</u>	278	344		
437.leslie3d	8	330	228	<u>329</u>	<u>228</u>	329	228	8	330	228	329	229	<u>329</u>	<u>228</u>		
444.namd	8	461	139	<u>461</u>	<u>139</u>	461	139	8	452	142	<u>452</u>	<u>142</u>	452	142		
447.dealII	8	292	314	292	313	<u>292</u>	<u>313</u>	8	292	314	292	313	<u>292</u>	<u>313</u>		
450.soplex	8	366	182	<u>365</u>	<u>183</u>	365	183	8	<u>361</u>	<u>185</u>	360	185	362	184		
453.povray	8	<u>159</u>	<u>268</u>	159	268	160	266	8	<u>134</u>	<u>319</u>	133	320	134	317		
454.calculix	8	224	294	225	293	<u>225</u>	<u>294</u>	8	224	294	225	293	<u>225</u>	<u>294</u>		
459.GemsFDTD	8	499	170	501	170	<u>500</u>	<u>170</u>	8	499	170	501	170	<u>500</u>	<u>170</u>		
465.tonto	8	325	242	326	241	<u>325</u>	<u>242</u>	8	<u>308</u>	<u>256</u>	308	256	307	256		
470.lbm	8	<u>297</u>	<u>370</u>	297	370	297	370	8	<u>297</u>	<u>370</u>	297	370	<u>297</u>	<u>370</u>		
481.wrf	8	267	335	268	333	<u>267</u>	<u>334</u>	8	<u>262</u>	<u>341</u>	266	336	262	341		
482.sphinx3	8	624	250	<u>622</u>	<u>251</u>	619	252	8	<u>624</u>	<u>250</u>	<u>622</u>	<u>251</u>	619	252		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on dx360M4 Fri Jun 20 06:32:18 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
        2 "physical id"s (chips)
        8 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 4
        siblings : 4
        physical 0: cores 0 1 2 3
        physical 1: cores 0 1 2 3
    cache size : 10240 KB
```

```
From /proc/meminfo
    MemTotal:       264644468 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
    x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 18 17:24
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/mapper/vg_td2-lv_home
                    ext4   380G  174G  188G  49%  /home
```

Additional information from dmidecode:
BIOS IBM -[TDE139OUS-1.50]- 02/21/2014
Memory:
16x Samsung M393B2G70QH0-CMA 16 GB 1333 MHz 2 rank

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/lib32:/home/SPECcpu-20140116-ic14.0/lib64:/home/SPECcpu-20140116-ic14.0/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep-

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 260

SPECfp_rate_base2006 = 255

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 00:33:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.