SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECfp®_rate2006 = 61.9

SPECfp_rate_base2006 = 61.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Apr-2013

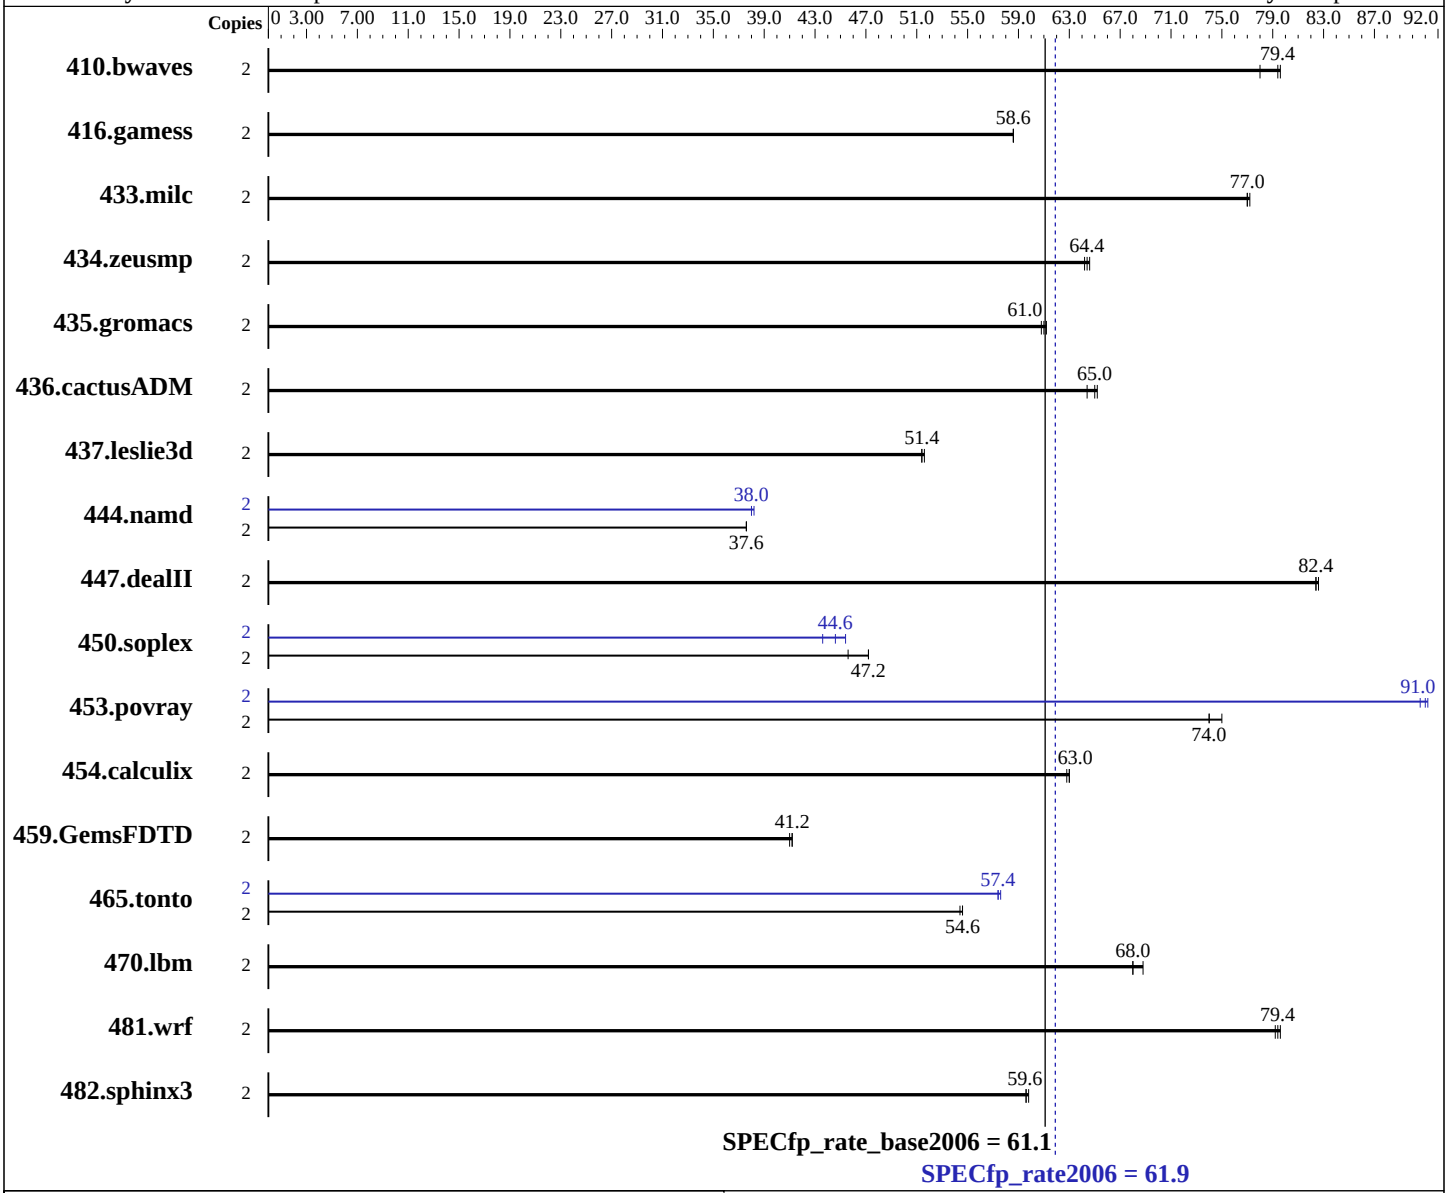

Hardware

CPU Name:	Intel Pentium G3220T
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECfp_rate2006 = 61.9

SPECfp_rate_base2006 = 61.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Apr-2013

L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11, running at 1333 MHz and CL9)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	349	78.0	341	79.6	**342**	**79.4**	2	349	78.0	341	79.6	**342**	**79.4**
416.gamess	2	667	58.6	667	58.6	**667**	**58.6**	2	667	58.6	667	58.6	**667**	**58.6**
433.milc	2	**238**	**77.0**	238	77.2	238	77.0	2	**238**	**77.0**	238	77.2	238	77.0
434.zeusmp	2	282	64.6	284	64.2	**283**	**64.4**	2	282	64.6	284	64.2	**283**	**64.4**
435.gromacs	2	235	60.8	**234**	**61.0**	233	61.2	2	235	60.8	**234**	**61.0**	233	61.2
436.cactusADM	2	371	64.4	366	65.2	**367**	**65.0**	2	371	64.4	366	65.2	**367**	**65.0**
437.leslie3d	2	366	51.4	365	51.6	**365**	**51.4**	2	366	51.4	365	51.6	**365**	**51.4**
444.namd	2	426	37.6	427	37.6	**426**	**37.6**	2	421	38.0	**421**	**38.0**	421	38.2
447.dealII	2	278	82.4	**278**	**82.4**	277	82.6	2	278	82.4	**278**	**82.4**	277	82.6
450.soplex	2	366	45.6	353	47.2	**354**	**47.2**	2	**374**	**44.6**	383	43.6	367	45.4
453.povray	2	142	75.0	**144**	**74.0**	144	74.0	2	**117**	**91.0**	117	91.2	117	90.6
454.calculix	2	**262**	**63.0**	262	63.0	262	62.8	2	**262**	**63.0**	262	63.0	262	62.8
459.GemsFDTD	2	**516**	**41.2**	514	41.2	517	41.0	2	**516**	**41.2**	514	41.2	517	41.0
465.tonto	2	360	54.6	**361**	**54.6**	362	54.4	2	342	57.6	343	57.4	**342**	**57.4**
470.lbm	2	**404**	**68.0**	405	68.0	400	68.8	2	**404**	**68.0**	405	68.0	400	68.8
481.wrf	2	282	79.2	280	79.6	**282**	**79.4**	2	282	79.2	280	79.6	**282**	**79.4**
482.sphinx3	2	655	59.6	653	59.8	**654**	**59.6**	2	655	59.6	653	59.8	**654**	**59.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.1 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt00224D4FB715 Sun Nov 24 07:31:05 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ87PG__
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2600 Mhz
BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 512
L3CacheSize   : 3072
MaxClockSpeed : 2600
Name          : Intel(R) Pentium(R) CPU G3220T @ 2.60GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc10

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 -link /FORCE:MULTIPLE

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc10 -Qstd=c99

C++ benchmarks:
icl -Qvc10

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

453.povray: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 -link /FORCE:MULTIPLE`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:49:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.