



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5500 APU
with Radeon HD Graphics)

SPECfp®_rate2006 = 61.4

SPECfp_rate_base2006 = 60.7

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

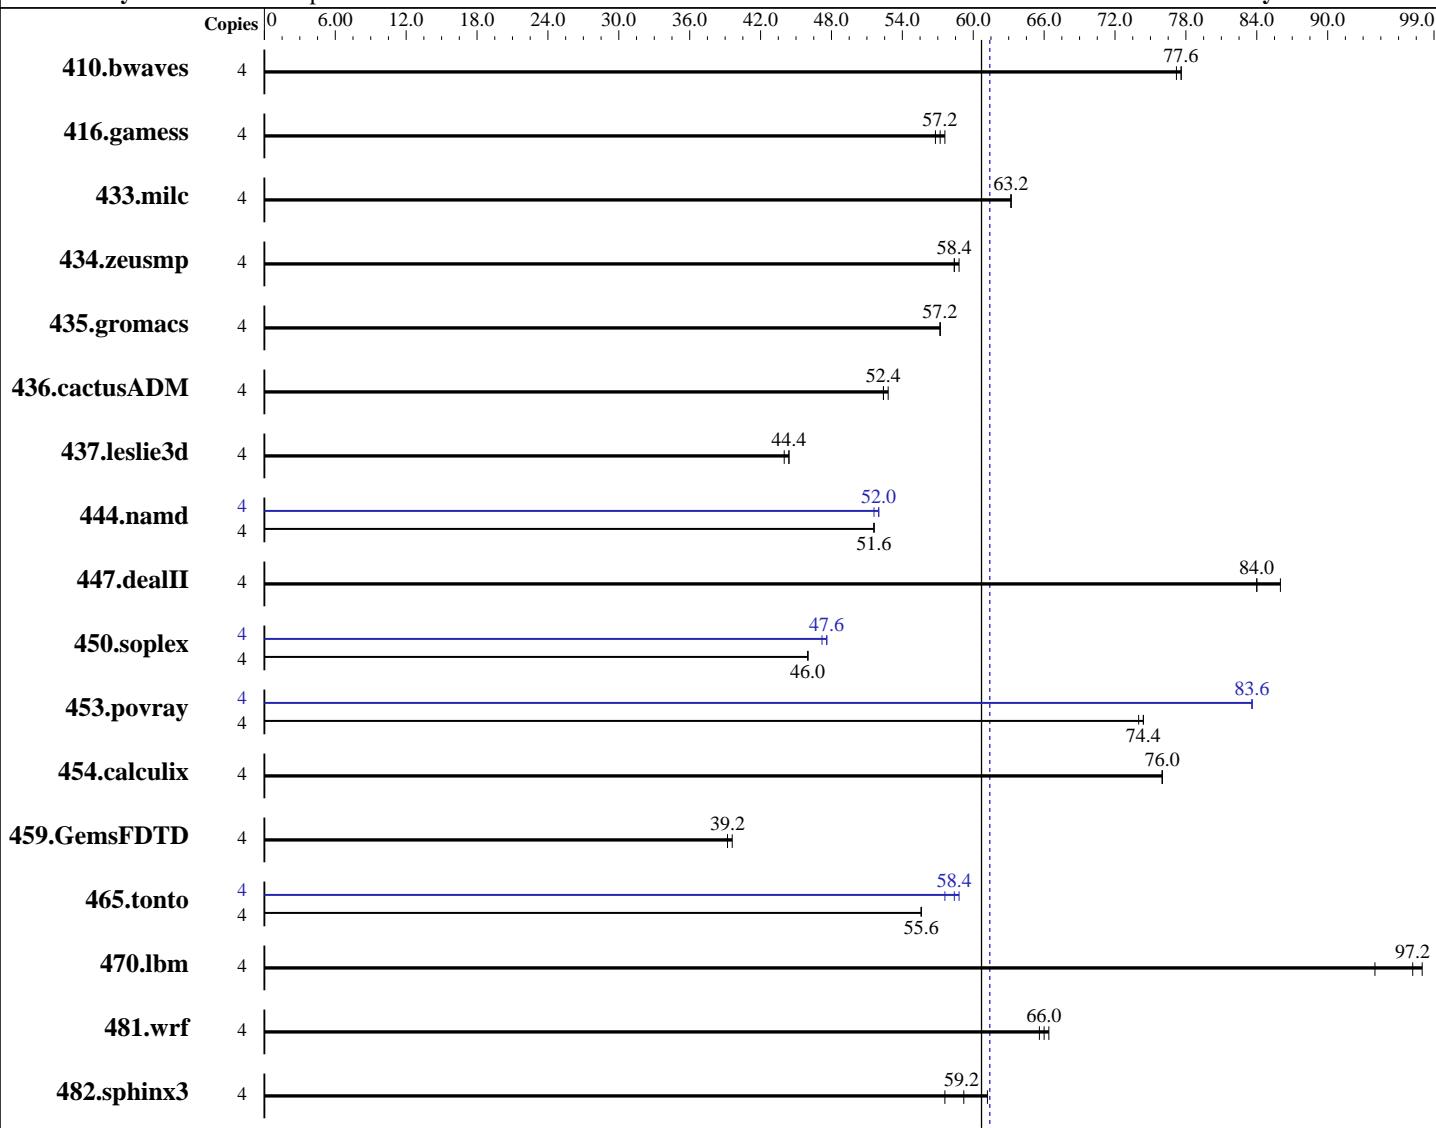

SPECfp_rate_base2006 = 60.7

SPECfp_rate2006 = 61.4

Hardware

CPU Name: AMD A8-5500
 CPU Characteristics: AMD Turbo CORE technology up to 3.70 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5500 APU
with Radeon HD Graphics)

SPECfp_rate2006 = 61.4

SPECfp_rate_base2006 = 60.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

L3 Cache:	None	File System:	NTFS
Other Cache:	None	System State:	Default
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)	Base Pointers:	32/64-bit
Disk Subsystem:	1 TB SATA HDD, 7200 RPM	Peak Pointers:	32/64-bit
Other Hardware:	None	Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	702	77.6	699	77.6	703	77.2	4	702	77.6	699	77.6	703	77.2
416.gamess	4	1365	57.2	1362	57.6	1375	56.8	4	1365	57.2	1362	57.6	1375	56.8
433.milc	4	581	63.2	582	63.2	582	63.2	4	581	63.2	582	63.2	582	63.2
434.zeusmp	4	621	58.4	621	58.8	625	58.4	4	621	58.4	621	58.8	625	58.4
435.gromacs	4	499	57.2	500	57.2	500	57.2	4	499	57.2	500	57.2	500	57.2
436.cactusADM	4	910	52.4	907	52.8	910	52.4	4	910	52.4	907	52.8	910	52.4
437.leslie3d	4	856	44.0	844	44.4	845	44.4	4	856	44.0	844	44.4	845	44.4
444.namd	4	624	51.6	622	51.6	623	51.6	4	617	52.0	618	52.0	624	51.6
447.dealII	4	546	84.0	531	86.0	544	84.0	4	546	84.0	531	86.0	544	84.0
450.soplex	4	726	46.0	725	46.0	722	46.0	4	705	47.2	703	47.6	702	47.6
453.povray	4	286	74.4	286	74.4	287	74.0	4	255	83.6	254	83.6	255	83.6
454.calculix	4	434	76.0	434	76.0	434	76.0	4	434	76.0	434	76.0	434	76.0
459.GemsFDTD	4	1085	39.2	1070	39.6	1083	39.2	4	1085	39.2	1070	39.6	1083	39.2
465.tonto	4	708	55.6	710	55.6	709	55.6	4	671	58.8	674	58.4	685	57.6
470.lbm	4	584	94.0	561	98.0	566	97.2	4	584	94.0	561	98.0	566	97.2
481.wrf	4	674	66.4	680	65.6	676	66.0	4	674	66.4	680	65.6	676	66.0
482.sphinx3	4	1278	61.2	1351	57.6	1315	59.2	4	1278	61.2	1351	57.6	1315	59.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:

"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5500 APU
with Radeon HD Graphics)

SPECfp_rate2006 = 61.4

SPECfp_rate_base2006 = 60.7

CPU2006 license: 13

Test date: Jul-2014

Test sponsor: Intel Corporation

Hardware Availability: Aug-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes

```
Sysinfo program C:\SPEC14.0\Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt3085A9AEE495 Wed Jul 2 02:40:54 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 8.1 Pro
OS Version   : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
[01]: AMD64 Family 21 Model 16 Stepping 1 AuthenticAMD ~3200 Mhz
BIOS Version  : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 7,366 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 4096
L3CacheSize  : 0
MaxClockSpeed : 3200
Name         : AMD A8-5500 APU with Radeon(tm) HD Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5500 APU
with Radeon HD Graphics)

SPECfp_rate2006 = 61.4

SPECfp_rate_base2006 = 60.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
    433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
    444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
    -Qoption_cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
    470.lbm: -DSPEC_CPU_P64
        481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F10000000000 -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F10000000000 shlw64M.lib
    -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F10000000000 -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F10000000000 -link /FORCE:MULTIPLE
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5500 APU
with Radeon HD Graphics)

SPECfp_rate2006 = 61.4

SPECfp_rate_base2006 = 60.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlw64M.lib -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE
```

```
453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32  
/F1000000000 shlw64M.lib -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5500 APU
with Radeon HD Graphics)

SPECfp_rate2006 = 61.4

SPECfp_rate_base2006 = 60.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll14 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 12 15:02:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 August 2014.