



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECfp®2006 = 53.7

SPECfp_base2006 = 53.1

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

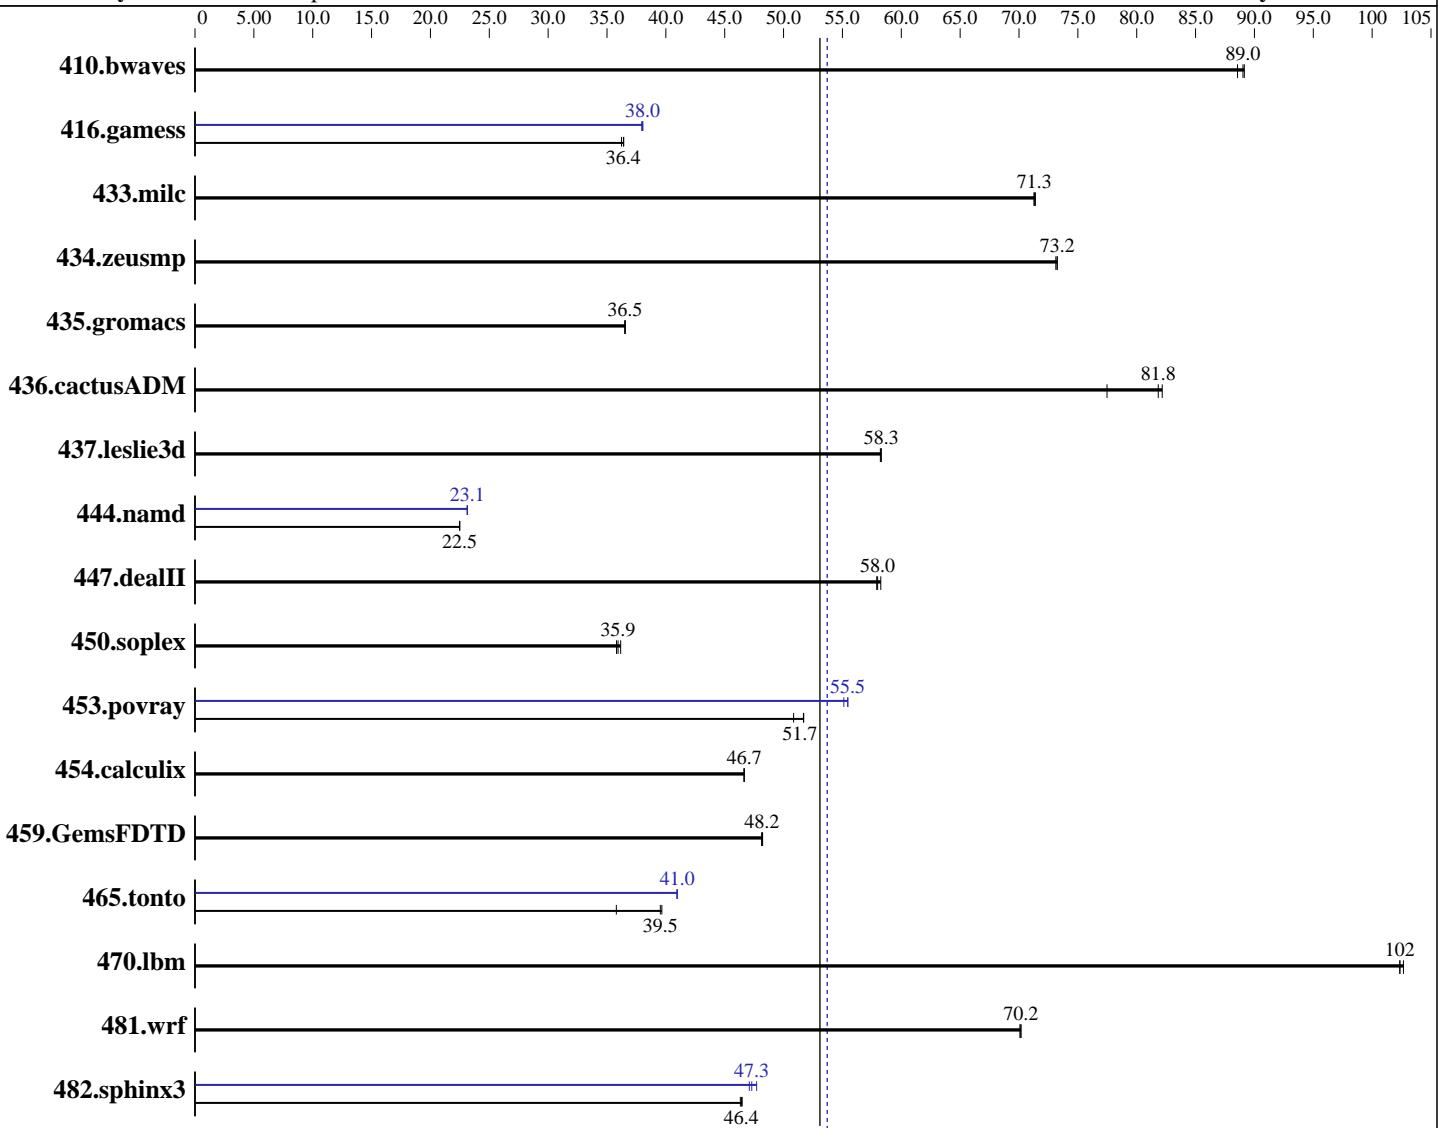

Hardware

CPU Name: Intel Pentium G3240
CPU Characteristics:
CPU MHz: 3100
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: Kernel 2.6.32-431.el6.x86_64
C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.2.144 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECfp2006 = 53.7

CPU2006 license: 9006

Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio								
410.bwaves	153	88.6	<u>153</u>	<u>89.0</u>	152	89.1	153	88.6	<u>153</u>	<u>89.0</u>	152	89.1
416.gamess	538	36.4	540	36.2	<u>538</u>	<u>36.4</u>	515	38.0	516	37.9	<u>515</u>	<u>38.0</u>
433.milc	<u>129</u>	<u>71.3</u>	129	71.4	129	71.3	<u>129</u>	<u>71.3</u>	129	71.4	129	71.3
434.zeusmp	124	73.1	124	73.2	<u>124</u>	<u>73.2</u>	124	73.1	124	73.2	<u>124</u>	<u>73.2</u>
435.gromacs	196	36.5	<u>196</u>	<u>36.5</u>	195	36.6	196	36.5	<u>196</u>	<u>36.5</u>	195	36.6
436.cactusADM	<u>146</u>	<u>81.8</u>	154	77.5	145	82.2	<u>146</u>	<u>81.8</u>	154	77.5	145	82.2
437.leslie3d	161	58.2	161	58.3	<u>161</u>	<u>58.3</u>	161	58.2	161	58.3	<u>161</u>	<u>58.3</u>
444.namd	357	22.5	357	22.5	<u>357</u>	<u>22.5</u>	347	23.1	<u>347</u>	<u>23.1</u>	347	23.1
447.dealII	198	57.9	196	58.3	<u>197</u>	<u>58.0</u>	198	57.9	196	58.3	<u>197</u>	<u>58.0</u>
450.soplex	231	36.2	233	35.8	<u>232</u>	<u>35.9</u>	231	36.2	233	35.8	<u>232</u>	<u>35.9</u>
453.povray	105	50.9	103	51.7	<u>103</u>	<u>51.7</u>	95.9	55.5	96.5	55.1	<u>95.9</u>	<u>55.5</u>
454.calculix	177	46.7	177	46.7	<u>177</u>	<u>46.7</u>	177	46.7	177	46.7	<u>177</u>	<u>46.7</u>
459.GemsFDTD	220	48.1	220	48.2	<u>220</u>	<u>48.2</u>	220	48.1	220	48.2	<u>220</u>	<u>48.2</u>
465.tonto	248	39.7	275	35.8	<u>249</u>	<u>39.5</u>	240	41.0	240	41.0	<u>240</u>	<u>41.0</u>
470.lbm	<u>134</u>	<u>102</u>	134	103	134	102	<u>134</u>	<u>102</u>	134	103	134	102
481.wrf	<u>159</u>	<u>70.2</u>	159	70.1	159	70.2	<u>159</u>	<u>70.2</u>	159	70.1	159	70.2
482.sphinx3	<u>420</u>	<u>46.4</u>	419	46.5	421	46.3	408	47.7	<u>412</u>	<u>47.3</u>	414	47.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "2"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECfp2006 = 53.7

CPU2006 license: 9006

Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

General Notes (Continued)

Added glibc-static-2.12-1.132.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xsse4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECfp2006 = 53.7

CPU2006 license: 9006

Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECfp2006 =

53.7

SPECfp_base2006 =

53.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date:

Jun-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECfp2006 = 53.7

SPECfp_base2006 = 53.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:10:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2014.