SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8891 v2, 3.20 GHz)

SPECfp®_rate2006 = 2810

SPECfp_rate_base2006 = 2730

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2014
Hardware Availability: Jun-2014
Software Availability: Nov-2013

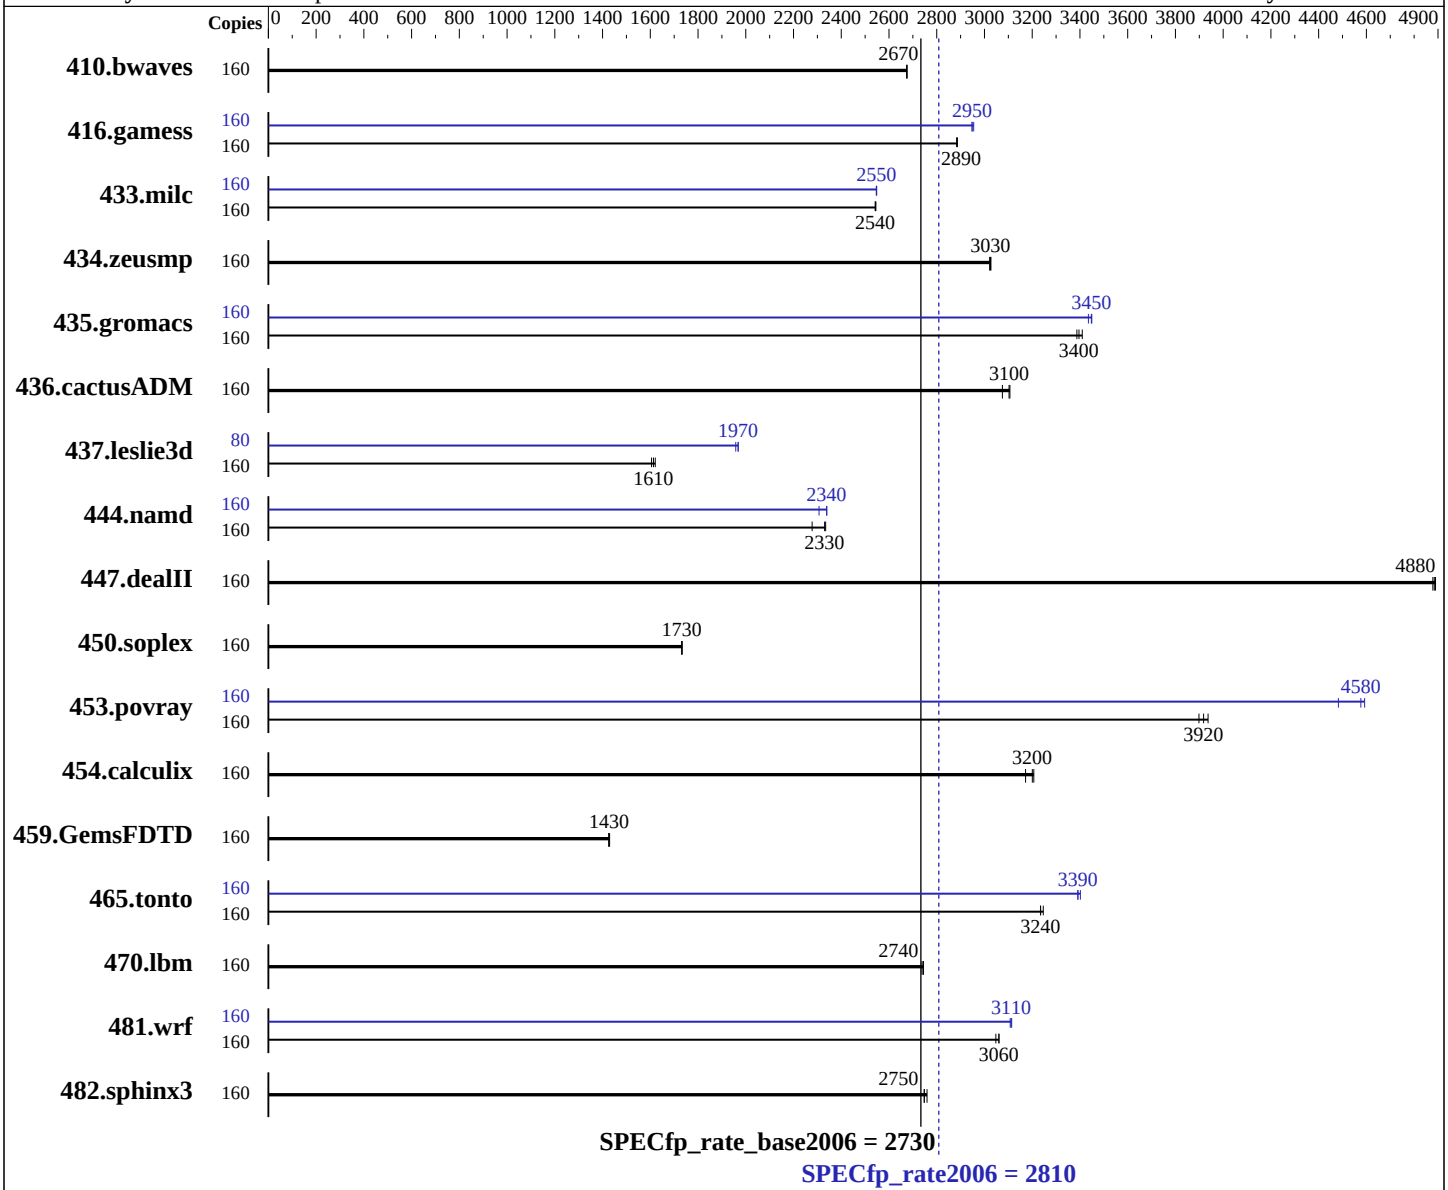

Hardware

CPU Name:	Intel Xeon E7-8891 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	80 cores, 8 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	4,6,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8891 v2, 3.20 GHz)

SPECfp_rate2006 = 2810

SPECfp_rate_base2006 = 2730

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2014
Hardware Availability: Jun-2014
Software Availability: Nov-2013

L3 Cache: 37.5 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 400 GB SATA, SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	**813**	**2670**	813	2680	813	2670	160	**813**	**2670**	813	2680	813	2670
416.gamess	160	1086	2880	1085	2890	**1086**	**2890**	160	**1063**	**2950**	1060	2950	1063	2950
433.milc	160	578	2540	577	2550	**578**	**2540**	160	576	2550	**577**	**2550**	577	2550
434.zeusmp	160	481	3030	482	3020	**481**	**3030**	160	481	3030	482	3020	**481**	**3030**
435.gromacs	160	335	3410	337	3390	**336**	**3400**	160	331	3450	333	3440	**331**	**3450**
436.cactusADM	160	622	3080	**616**	**3100**	615	3110	160	622	3080	**616**	**3100**	615	3110
437.leslie3d	160	928	1620	937	1610	**932**	**1610**	80	384	1960	382	1970	**382**	**1970**
444.namd	160	**551**	**2330**	550	2330	563	2280	160	548	2340	**549**	**2340**	556	2310
447.dealII	160	374	4890	**375**	**4880**	375	4880	160	374	4890	**375**	**4880**	375	4880
450.soplex	160	771	1730	**770**	**1730**	770	1730	160	771	1730	**770**	**1730**	770	1730
453.povray	160	**217**	**3920**	218	3900	216	3940	160	190	4480	185	4590	**186**	**4580**
454.calculix	160	412	3210	**412**	**3200**	416	3170	160	412	3210	**412**	**3200**	416	3170
459.GemsFDTD	160	1191	1430	1187	1430	**1190**	**1430**	160	1191	1430	1187	1430	**1190**	**1430**
465.tonto	160	487	3230	485	3250	**487**	**3240**	160	**464**	**3390**	464	3390	463	3400
470.lbm	160	803	2740	801	2740	**801**	**2740**	160	803	2740	801	2740	**801**	**2740**
481.wrf	160	584	3060	**584**	**3060**	586	3050	160	575	3110	574	3110	**574**	**3110**
482.sphinx3	160	1135	2750	1130	2760	**1135**	**2750**	160	1135	2750	1130	2760	**1135**	**2750**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Operating Mode set to Maximum Perfomance in BIOS
Memory Data Scrambling Disabled
Patrol Scrub Disabled
Sysinfo program /cpu2006.1.2_14_aug2013/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on x3950x6 Fri Aug 15 22:36:57 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8891 v2 @ 3.20GHz
      8 "physical id"s (chips)
      160 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 2 3 4 5 6 7 8 10 11 12
      physical 1: cores 2 3 4 5 6 7 8 10 11 12
      physical 2: cores 2 3 4 5 6 7 8 10 11 12
      physical 3: cores 2 3 4 5 6 7 8 10 11 12
      physical 4: cores 2 3 4 5 6 7 8 10 11 12
      physical 5: cores 2 3 4 5 6 7 8 10 11 12
      physical 6: cores 2 3 4 5 6 7 8 10 11 12
      physical 7: cores 2 3 4 5 6 7 8 10 11 12
   cache size : 38400 KB

From /proc/meminfo
   MemTotal:       2117456592 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux x3950x6 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 15 11:17

SPEC is set to: /cpu2006.1.2_14_aug2013
   Filesystem                     Type  Size  Used Avail Use% Mounted on
   /dev/mapper/vg_x3950x6-lv_root ext4  357G   78G  262G  23% /
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:
   BIOS IBM -[A8E107JUS-1.00]- 05/02/2014
   Memory:
    96x Hynix HMT42GR7AFR4A-PB 16 GB 1333 MHz 2 rank
    64x NO DIMM Unknown
    32x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2_14_aug2013/libs/32:/cpu2006.1.2_14_aug2013/libs/64:/cpu2006.1.2_14_aug2013/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Base Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `-xAVX -ipo -O3 -no-prec-div -auto-ilp32`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 14 10:51:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 October 2014.