SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH640 V2 (Intel Xeon E5-4627 v2)

SPECfp®_rate2006 = 716

SPECfp_rate_base2006 = 703

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

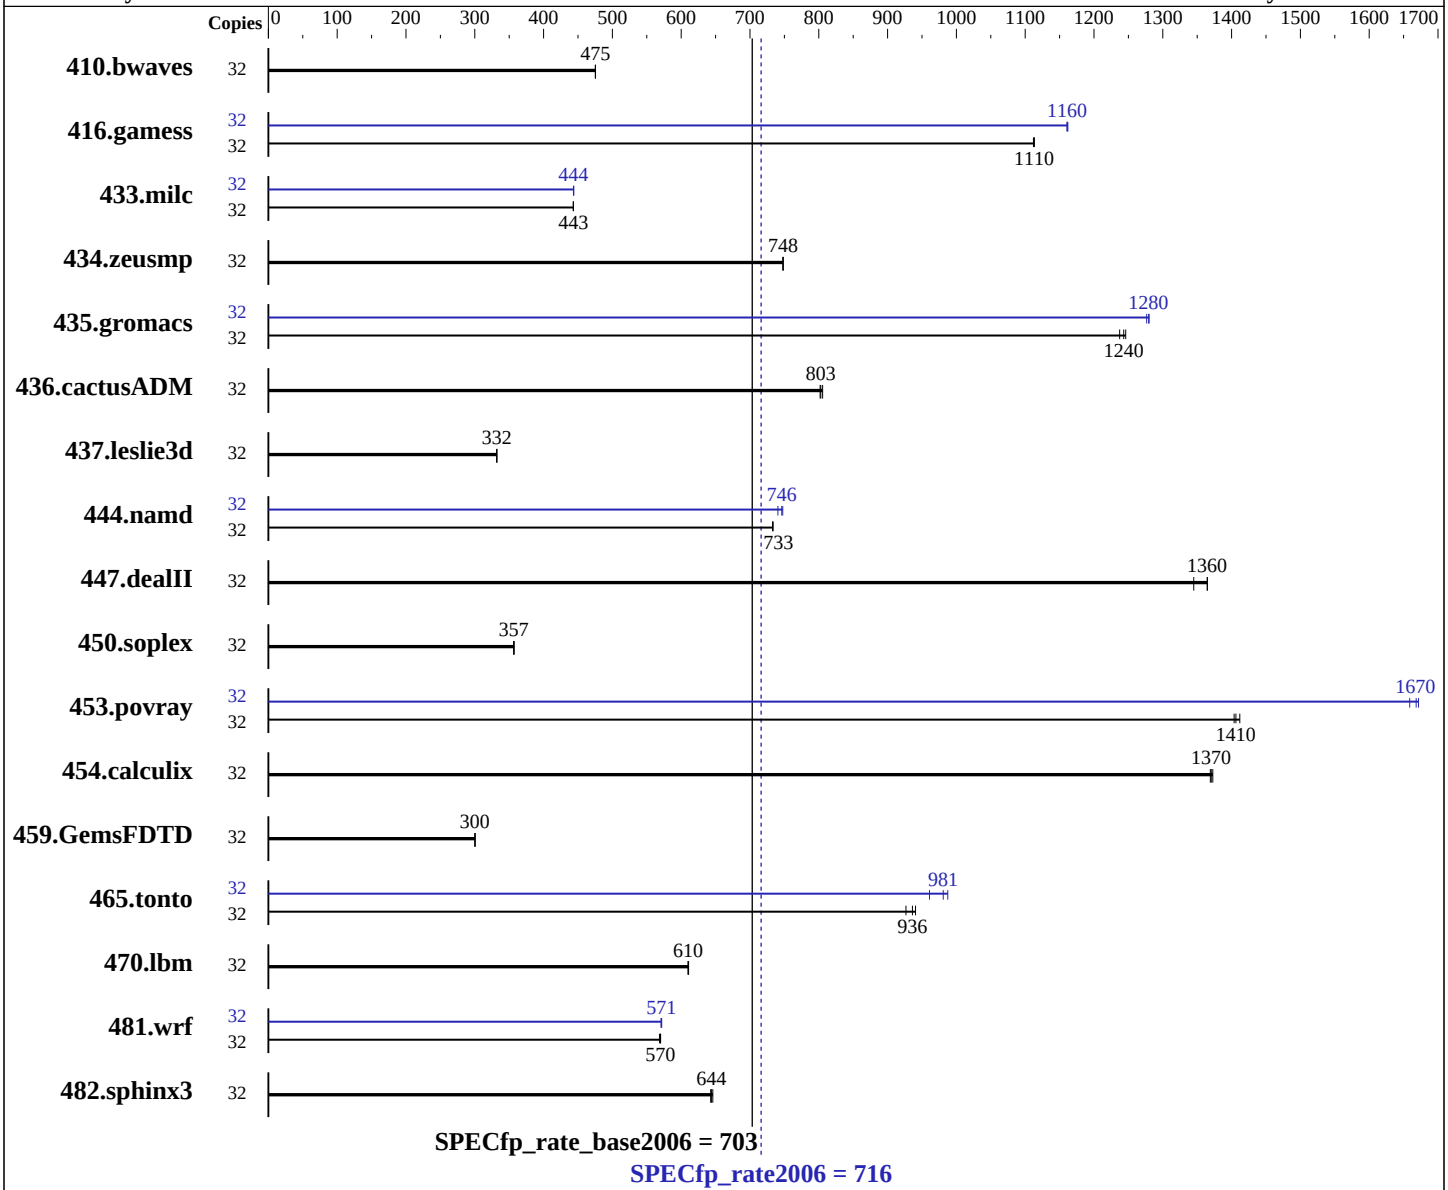

Hardware

CPU Name:	Intel Xeon E5-4627 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH640 V2 (Intel Xeon E5-4627 v2)

SPECfp_rate2006 = 716

SPECfp_rate_base2006 = 703

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 600 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	915	475	915	475	**915**	**475**	32	915	475	915	475	**915**	**475**
416.gamess	32	563	1110	563	1110	**563**	**1110**	32	539	1160	540	1160	**540**	**1160**
433.milc	32	663	443	**663**	**443**	662	443	32	662	444	**662**	**444**	662	443
434.zeusmp	32	389	748	389	748	**389**	**748**	32	389	748	389	748	**389**	**748**
435.gromacs	32	183	1250	**184**	**1240**	185	1240	32	178	1280	179	1280	**179**	**1280**
436.cactusADM	32	477	802	475	806	**476**	**803**	32	477	802	475	806	**476**	**803**
437.leslie3d	32	906	332	906	332	**906**	**332**	32	906	332	906	332	**906**	**332**
444.namd	32	350	733	350	733	**350**	**733**	32	347	741	343	748	**344**	**746**
447.dealII	32	268	1360	272	1340	**268**	**1360**	32	268	1360	272	1340	**268**	**1360**
450.soplex	32	748	357	747	357	**748**	**357**	32	748	357	747	357	**748**	**357**
453.povray	32	121	1400	121	1410	**121**	**1410**	32	103	1660	**102**	**1670**	102	1670
454.calculix	32	192	1370	**193**	**1370**	193	1370	32	192	1370	**193**	**1370**	193	1370
459.GemsFDTD	32	1131	300	1130	300	**1131**	**300**	32	1131	300	1130	300	**1131**	**300**
465.tonto	32	**336**	**936**	340	927	335	941	32	319	987	**321**	**981**	328	961
470.lbm	32	721	610	720	611	**720**	**610**	32	721	610	720	611	**720**	**610**
481.wrf	32	**627**	**570**	627	570	629	568	32	625	572	**626**	**571**	626	571
482.sphinx3	32	**969**	**644**	965	646	970	643	32	**969**	**644**	965	646	970	643

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /spec14/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Thu Sep 11 01:29:16 2014
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4627 v2 @ 3.30GHz
      4 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
      physical 2: cores 0 1 2 3 4 5 6 7
      physical 3: cores 0 1 2 3 4 5 6 7
   cache size : 16384 KB

From /proc/meminfo
   MemTotal:       264477564 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
   EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 10 18:19

SPEC is set to: /spec14
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda6      ext4  355G   44G  294G  13% /

Additional information from dmidecode:
  BIOS Insyde Corp. RMIBV386 06/30/2014
  Memory:
   16x Hynix HMT42GR7MFR4C-PB 16 GB 1600 MHz 2 rank
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
     465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 14 13:27:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 October 2014.