



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = **65.6**

Express5800/T110g-E (Intel Core i3-4350)

SPECfp_base2006 = **64.5**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

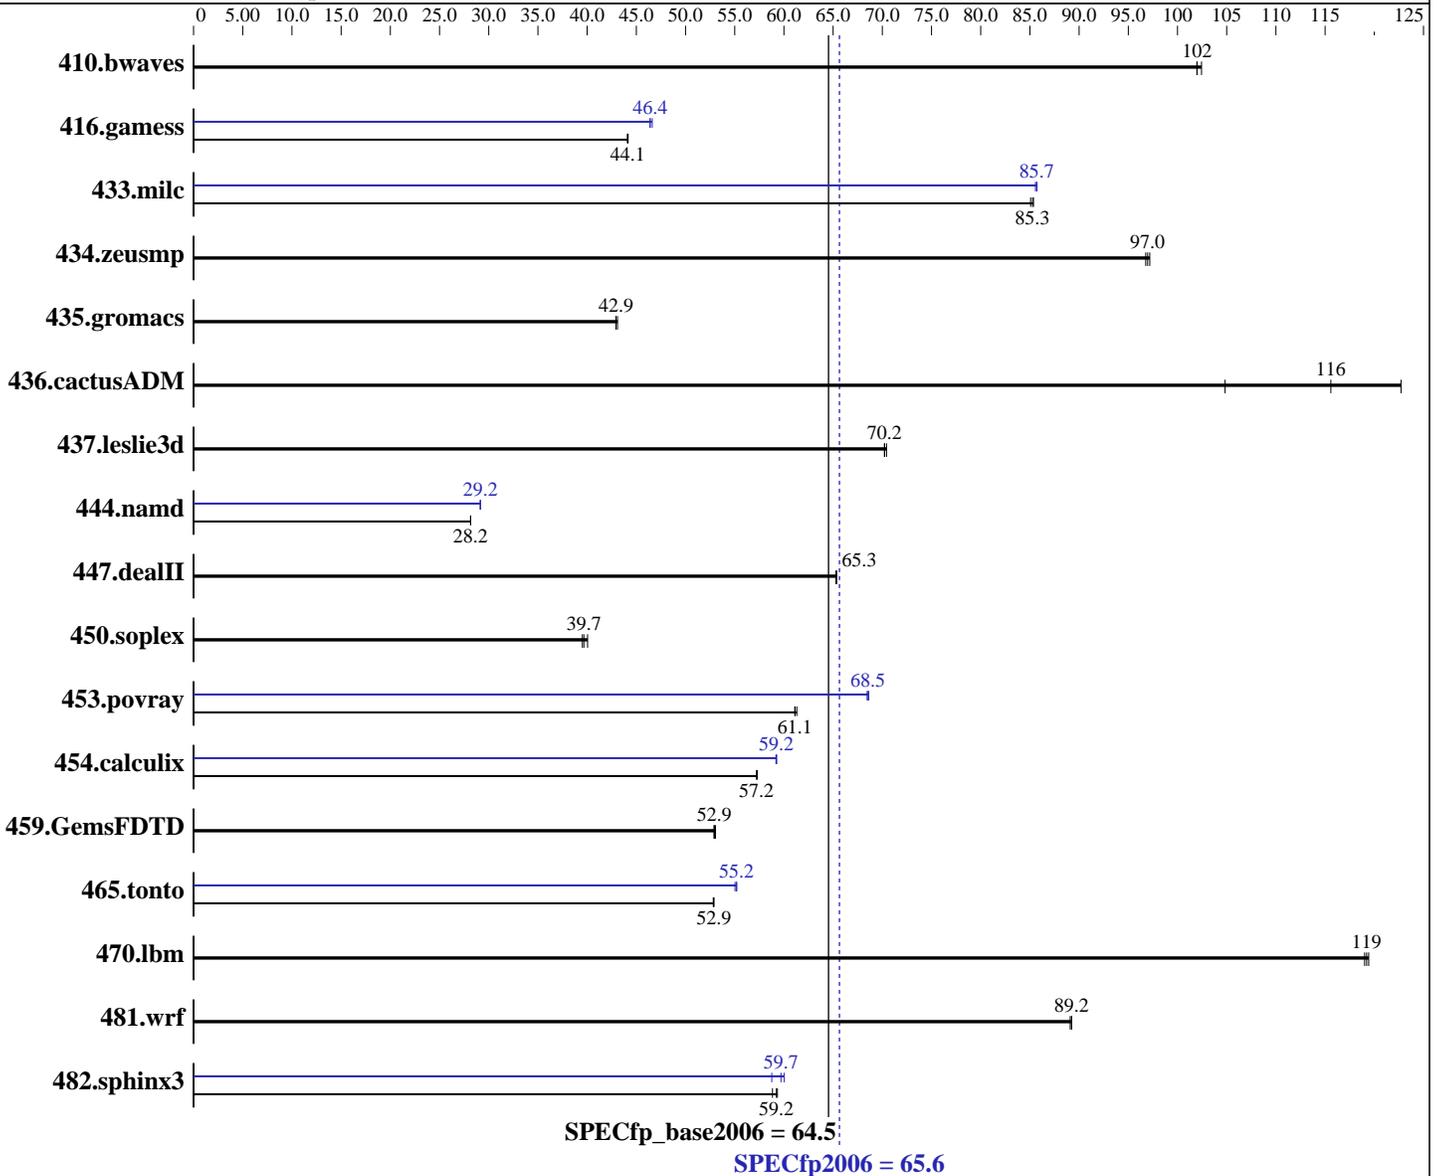

Hardware

CPU Name: Intel Core i3-4350
 CPU Characteristics:
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.2.144 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **65.6**

Express5800/T110g-E (Intel Core i3-4350)

SPECfp_base2006 = **64.5**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	133	102	133	102	<u>133</u>	<u>102</u>	133	102	133	102	<u>133</u>	<u>102</u>
416.gamess	443	44.2	444	44.1	<u>444</u>	<u>44.1</u>	420	46.6	422	46.4	<u>422</u>	<u>46.4</u>
433.milc	108	85.1	<u>108</u>	<u>85.3</u>	108	85.4	<u>107</u>	<u>85.7</u>	107	85.7	107	85.6
434.zeusmp	94.0	96.8	93.6	97.2	<u>93.8</u>	<u>97.0</u>	94.0	96.8	93.6	97.2	<u>93.8</u>	<u>97.0</u>
435.gromacs	<u>166</u>	<u>42.9</u>	166	43.1	166	42.9	<u>166</u>	<u>42.9</u>	166	43.1	166	42.9
436.cactusADM	97.4	123	<u>103</u>	<u>116</u>	114	105	97.4	123	<u>103</u>	<u>116</u>	114	105
437.leslie3d	<u>134</u>	<u>70.2</u>	134	70.2	133	70.4	<u>134</u>	<u>70.2</u>	134	70.2	133	70.4
444.namd	<u>285</u>	<u>28.2</u>	285	28.2	285	28.2	275	29.2	<u>275</u>	<u>29.2</u>	275	29.1
447.dealII	175	65.4	175	65.3	<u>175</u>	<u>65.3</u>	175	65.4	175	65.3	<u>175</u>	<u>65.3</u>
450.soplex	208	40.0	211	39.5	<u>210</u>	<u>39.7</u>	208	40.0	211	39.5	<u>210</u>	<u>39.7</u>
453.povray	<u>87.0</u>	<u>61.1</u>	87.1	61.1	86.8	61.3	77.5	68.6	<u>77.6</u>	<u>68.5</u>	77.7	68.5
454.calculix	<u>144</u>	<u>57.2</u>	144	57.3	144	57.2	139	59.3	<u>139</u>	<u>59.2</u>	139	59.2
459.GemsFDTD	201	52.9	<u>200</u>	<u>52.9</u>	200	53.0	201	52.9	<u>200</u>	<u>52.9</u>	200	53.0
465.tonto	<u>186</u>	<u>52.9</u>	186	52.8	186	52.9	178	55.2	<u>178</u>	<u>55.2</u>	179	55.0
470.lbm	115	119	115	119	<u>115</u>	<u>119</u>	115	119	115	119	<u>115</u>	<u>119</u>
481.wrf	125	89.2	125	89.1	<u>125</u>	<u>89.2</u>	125	89.2	125	89.1	<u>125</u>	<u>89.2</u>
482.sphinx3	331	58.8	<u>329</u>	<u>59.2</u>	328	59.3	325	60.0	<u>326</u>	<u>59.7</u>	332	58.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Energy Performance: Performance
 Processor C6 Report: Disabled
 Package C State Limit: C0



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 65.6

Express5800/T110g-E (Intel Core i3-4350)

SPECfp_base2006 = 64.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "2"

Added glibc-static-2.12-1.132.el6.x86_64

to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 65.6

Express5800/T110g-E (Intel Core i3-4350)

SPECfp_base2006 = 64.5

CPU2006 license: 9006

Test date: Sep-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 65.6

Express5800/T110g-E (Intel Core i3-4350)

SPECfp_base2006 = 64.5

CPU2006 license: 9006

Test date: Sep-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 65.6

Express5800/T110g-E (Intel Core i3-4350)

SPECfp_base2006 = 64.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 8 19:40:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 October 2014.