



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1275L v3, 2.70 GHz

**SPECint®2006 = 61.1**

**SPECint\_base2006 = 58.2**

**CPU2006 license:** 19


**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Nov-2013

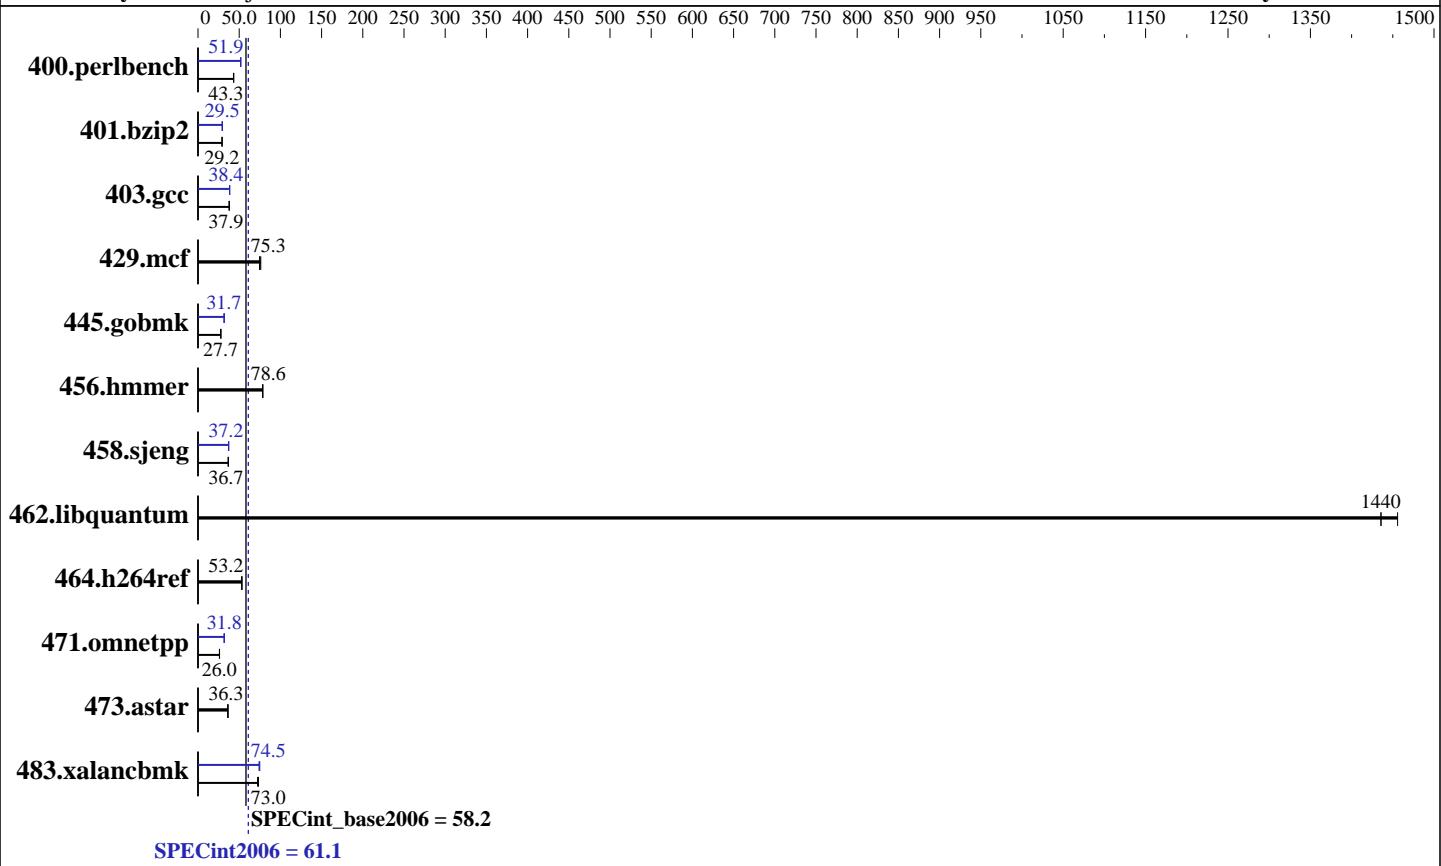

## Hardware

CPU Name: Intel Xeon E3-1275L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Compiler: 2.6.32-431.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1275L v3, 2.70 GHz

**SPECint2006 = 61.1**

**SPECint\_base2006 = 58.2**

CPU2006 license: 19

Test date: Jul-2014

Test sponsor: Fujitsu

Hardware Availability: Jul-2014

Tested by: Fujitsu

Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>226</b>	<b>43.3</b>	225	43.3	227	43.1	<b>188</b>	<b>51.9</b>	188	51.9	189	51.7
401.bzip2	<b>330</b>	<b>29.2</b>	330	29.2	330	29.2	<b>327</b>	<b>29.5</b>	328	29.5	327	29.5
403.gcc	212	38.0	<b>212</b>	<b>37.9</b>	213	37.8	210	38.4	210	38.4	<b>210</b>	<b>38.4</b>
429.mcf	120	76.2	<b>121</b>	<b>75.3</b>	122	74.6	120	76.2	<b>121</b>	<b>75.3</b>	122	74.6
445.gobmk	379	27.7	378	27.8	<b>379</b>	<b>27.7</b>	330	31.8	<b>330</b>	<b>31.7</b>	331	31.7
456.hmmer	119	78.7	119	78.4	<b>119</b>	<b>78.6</b>	119	78.7	119	78.4	<b>119</b>	<b>78.6</b>
458.sjeng	<b>330</b>	<b>36.7</b>	329	36.8	330	36.7	326	37.2	<b>325</b>	<b>37.2</b>	325	37.2
462.libquantum	14.4	1440	<b>14.4</b>	<b>1440</b>	14.2	1460	14.4	1440	<b>14.4</b>	<b>1440</b>	14.2	1460
464.h264ref	416	53.2	<b>416</b>	<b>53.2</b>	417	53.1	416	53.2	<b>416</b>	<b>53.2</b>	417	53.1
471.omnetpp	<b>240</b>	<b>26.0</b>	240	26.0	239	26.2	<b>196</b>	<b>31.8</b>	196	31.9	197	31.8
473.astar	194	36.2	<b>193</b>	<b>36.3</b>	193	36.4	<b>194</b>	<b>36.2</b>	<b>193</b>	<b>36.3</b>	193	36.4
483.xalancbmk	94.0	73.4	<b>94.5</b>	<b>73.0</b>	95.5	72.3	92.0	75.0	93.0	74.2	<b>92.6</b>	<b>74.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1275L v3, 2.70 GHz

**SPECint2006 = 61.1**

**SPECint\_base2006 = 58.2**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`445.gobmk: icc -m32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1275L v3, 2.70 GHz

**SPECint2006 = 61.1**

**SPECint\_base2006 = 58.2**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1275L v3, 2.70 GHz

**SPECint2006 = 61.1**

**SPECint\_base2006 = 58.2**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

464.h264ref: basepeak = yes

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap
```

473.astar: basepeak = yes

```
483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
                -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap
```

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Oct 16 12:00:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 October 2014.