



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint®2006 = 66.5**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017


**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

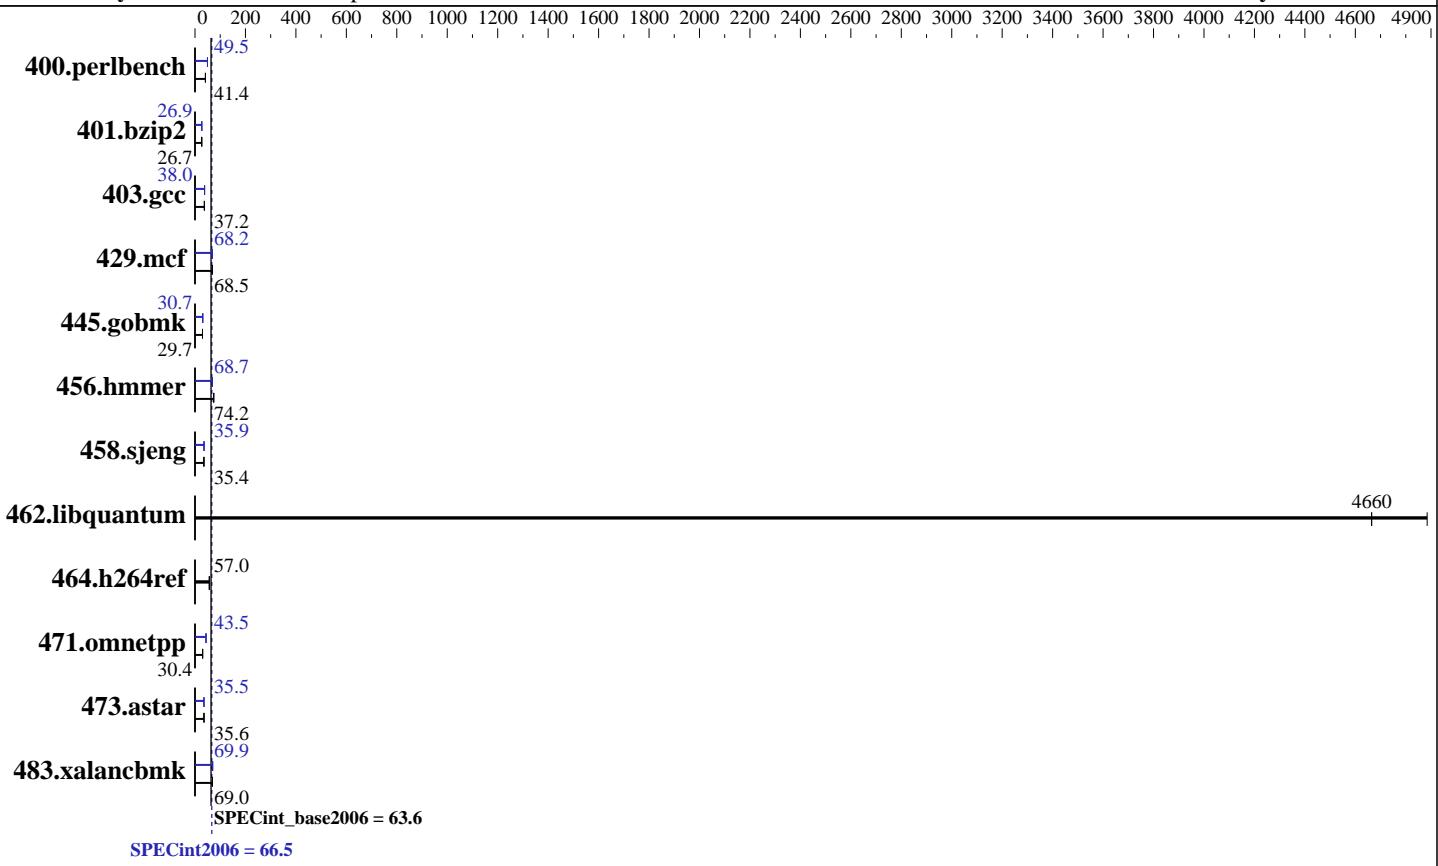

### Hardware

CPU Name:	Intel Xeon E5-2643 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 240 GB SATA SSD
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint2006 = 66.5**

**SPECint\_base2006 = 63.6**

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	237	41.3	<b><u>236</u></b>	<b><u>41.4</u></b>	236	41.4	<b><u>197</u></b>	<b><u>49.5</u></b>	<b><u>197</u></b>	<b><u>49.5</u></b>	197	49.5
401.bzip2	363	26.6	<b><u>362</u></b>	<b><u>26.7</u></b>	361	26.7	<b><u>358</u></b>	<b><u>26.9</u></b>	<b><u>359</u></b>	<b><u>26.9</u></b>	359	26.9
403.gcc	<b><u>216</u></b>	<b><u>37.2</u></b>	216	37.2	216	37.2	<b><u>212</u></b>	<b><u>38.0</u></b>	<b><u>212</u></b>	<b><u>38.0</u></b>	<b><u>212</u></b>	<b><u>38.0</u></b>
429.mcf	135	67.8	<b><u>133</u></b>	<b><u>68.5</u></b>	133	68.5	<b><u>134</u></b>	<b><u>68.2</u></b>	133	68.7	136	67.2
445.gobmk	<b><u>353</u></b>	<b><u>29.7</u></b>	352	29.8	353	29.7	<b><u>342</u></b>	<b><u>30.7</u></b>	<b><u>342</u></b>	<b><u>30.7</u></b>	342	30.7
456.hmmer	126	74.3	<b><u>126</u></b>	<b><u>74.2</u></b>	126	74.0	<b><u>136</u></b>	<b><u>68.8</u></b>	136	68.6	<b><u>136</u></b>	<b><u>68.7</u></b>
458.sjeng	342	35.3	<b><u>342</u></b>	<b><u>35.4</u></b>	342	35.4	<b><u>337</u></b>	<b><u>35.9</u></b>	337	35.9	<b><u>337</u></b>	<b><u>35.9</u></b>
462.libquantum	4.44	4660	<b><u>4.44</u></b>	<b><u>4660</u></b>	4.24	4880	<b><u>4.44</u></b>	<b><u>4660</u></b>	<b><u>4.44</u></b>	<b><u>4660</u></b>	4.24	4880
464.h264ref	391	56.6	<b><u>389</u></b>	<b><u>57.0</u></b>	388	57.0	<b><u>391</u></b>	<b><u>56.6</u></b>	<b><u>389</u></b>	<b><u>57.0</u></b>	388	57.0
471.omnetpp	205	30.5	210	29.8	<b><u>205</u></b>	<b><u>30.4</u></b>	144	43.5	<b><u>144</u></b>	<b><u>43.5</u></b>	143	43.8
473.astar	<b><u>197</u></b>	<b><u>35.6</u></b>	198	35.4	197	35.7	<b><u>198</u></b>	<b><u>35.5</u></b>	199	35.3	196	35.8
483.xalancbmk	<b><u>100</u></b>	<b><u>69.0</u></b>	99.7	69.2	100	68.9	<b><u>98.7</u></b>	<b><u>69.9</u></b>	<b><u>98.7</u></b>	<b><u>69.9</u></b>	<b><u>98.7</u></b>	<b><u>69.9</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Hyper-Threading set to Disabled  
 Performance Profile set to Custom  
 C1E Support set to Disabled  
 Core C3 set to Disabled  
 Core C6 set to Disabled  
 Thermal Profile set to High Fan Speed  
 Memory Power Savings set to Disabled  
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on RD650 Fri Oct 17 17:55:47 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz  
 2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint2006 = 66.5**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Platform Notes (Continued)

```
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings   : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264416592 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux RD650 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Oct 17 17:53

SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        ext4  217G   12G  195G   6%  /

Additional information from dmidecode:
BIOS LENOVO PB2TS110 10/06/2014
Memory:
16x 16 GB
16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2133 MHz 2 rank
8x NO DIMM NO DIMM

(End of data from sysinfo program)
RD650 support 4 channels and 12 DIMMs per processor, total 8 channels and
24 DIMMs. 16 DIMM slots installed with 16 GB DIMM for this run.
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP\_NUM\_THREADS = "12"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint2006 = 66.5**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmr: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
471.omnetpp: -DSPEC_CPU_LP64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint2006 = 66.5**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Base Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint2006 = 66.5**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revC.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECint2006 = 66.5**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:30:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.