SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.
Dell Precision Tower 7910

SPECint®2006 = 61.4

SPECint_base2006 = 59.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

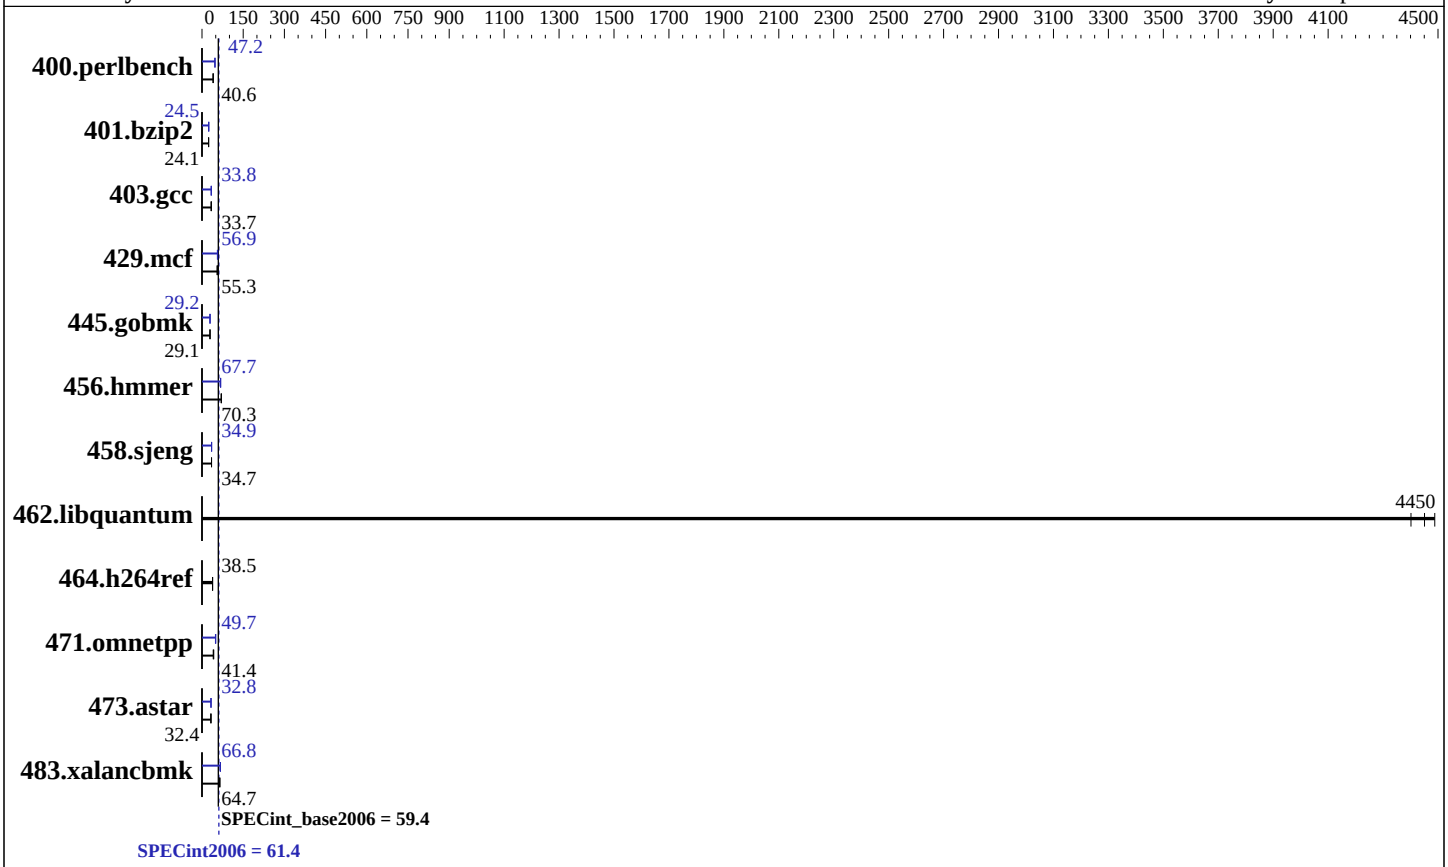

Hardware

CPU Name:	Intel Xeon E5-2699 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	240 GB (15 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	415 GB add more disk info here
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Workstation release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.
Dell Precision Tower 7910

SPECint2006 = 61.4

SPECint_base2006 = 59.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**241**	**40.6**	241	40.6	239	40.8	208	47.0	**207**	**47.2**	207	47.2
401.bzip2	**401**	**24.1**	402	24.0	400	24.1	394	24.5	394	24.5	**394**	**24.5**
403.gcc	239	33.7	**239**	**33.7**	239	33.6	239	33.7	**239**	**33.8**	238	33.8
429.mcf	160	57.0	165	55.3	**165**	**55.3**	163	56.0	160	57.0	**160**	**56.9**
445.gobmk	360	29.1	**360**	**29.1**	360	29.1	359	29.2	359	29.2	**359**	**29.2**
456.hmmer	**133**	**70.3**	133	70.1	133	70.4	**138**	**67.7**	138	67.8	138	67.7
458.sjeng	350	34.6	348	34.8	**348**	**34.7**	346	35.0	**346**	**34.9**	347	34.9
462.libquantum	4.62	4490	**4.66**	**4450**	4.71	4400	4.62	4490	**4.66**	**4450**	4.71	4400
464.h264ref	**575**	**38.5**	573	38.6	577	38.4	**575**	**38.5**	573	38.6	577	38.4
471.omnetpp	**151**	**41.4**	146	42.9	152	41.2	125	49.9	**126**	**49.7**	128	49.0
473.astar	217	32.4	**217**	**32.4**	215	32.6	214	32.8	214	32.7	**214**	**32.8**
483.xalancbmk	107	64.5	**107**	**64.7**	106	64.8	**103**	**66.8**	103	66.8	103	66.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/ashows/Desktop/speccpu15/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Mon Oct 20 08:58:07 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
      2 "physical id"s (chips)
      36 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 18
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

Continued on next page

Platform Notes (Continued)

```
      cache size : 46080 KB

   From /proc/meminfo
      MemTotal:       247384800 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Workstation"
         VERSION="7.0 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.0"
         PRETTY_NAME="Red Hat Enterprise Linux Workstation 7.0 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:workstation"
      redhat-release: Red Hat Enterprise Linux Workstation release 7.0 (Maipo)
      system-release: Red Hat Enterprise Linux Workstation release 7.0 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:workstation

   uname -a:
      Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
      EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Oct 20 08:56

   SPEC is set to: /home/ashows/Desktop/speccpu15
      Filesystem            Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-home xfs   415G  335G   80G  81% /home

   Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/home/ashows/Desktop/speccpu15/libs/32:/home/ashows/Desktop/speccpu15/libs/64:/home/ashows/Desktop/speccpu15/sh"
 OMP_NUM_THREADS = "36"

  Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
  memory using RedHat EL 7.0
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled

 Submitted_by: <Alex_Shows@DELL.com>
 Submitted: Tue Oct 21 09:52:04 EDT 2014
 Submission: cpu2006-20141021-32459.sub
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m64
```

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32`
`-opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel`
`-opt-prefetch -auto-p32`

445.gobmk: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2)
`-ansi-alias`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`
`-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 18 16:30:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.