



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint®2006 = 57.6**

Huawei RH1288 V3 (Intel Xeon E5-2640 v3)

**SPECint\_base2006 = 53.7**

CPU2006 license: 3175


**Test date:** Feb-2014

**Test sponsor:** Huawei

**Hardware Availability:** Sep-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

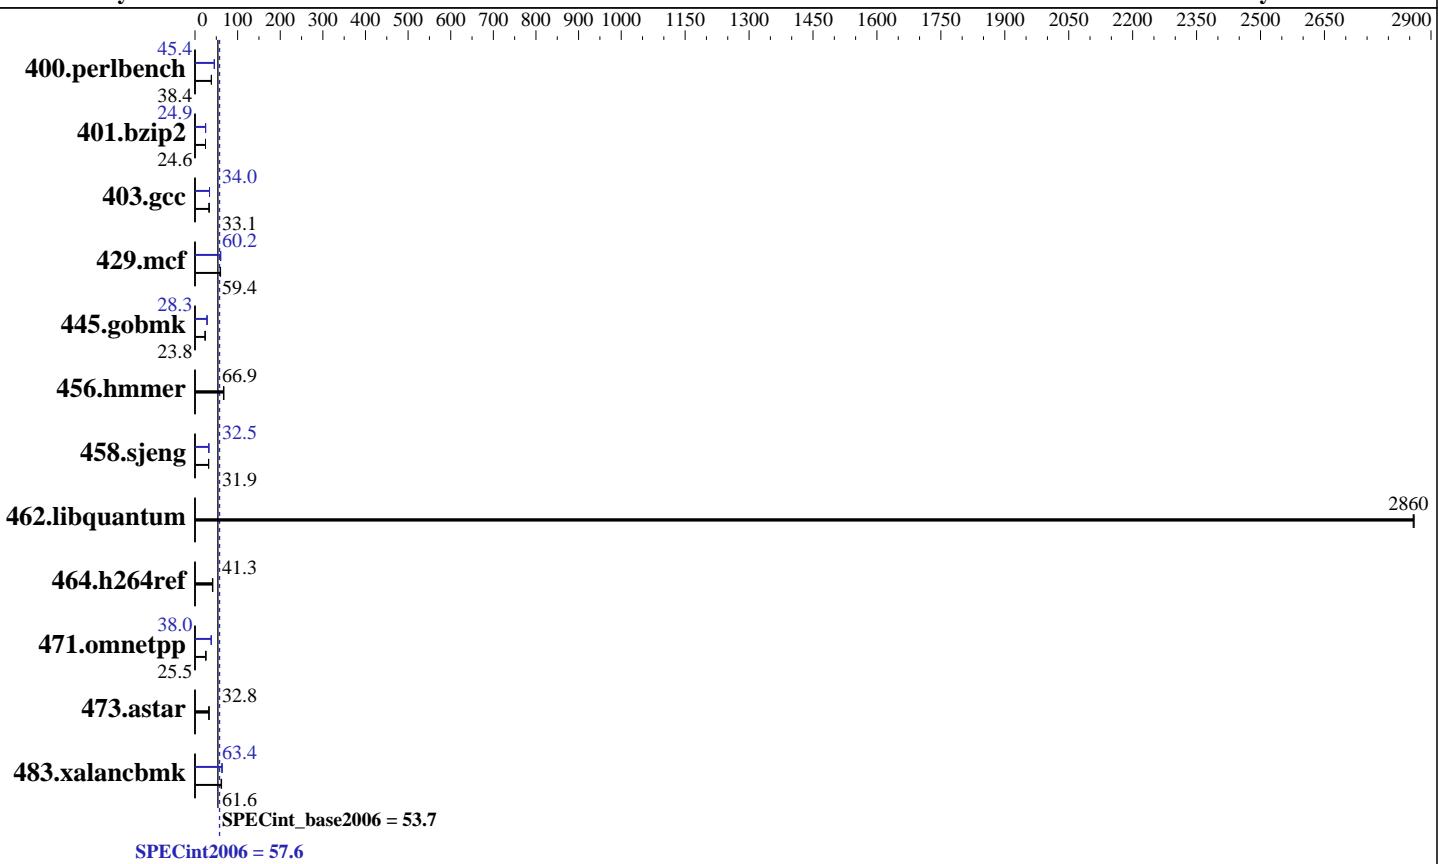

## Hardware

CPU Name:	Intel Xeon E5-2640 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1867 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

## Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 57.6**

Huawei RH1288 V3 (Intel Xeon E5-2640 v3)

**SPECint\_base2006 = 53.7**

CPU2006 license: 3175

Test date: Feb-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	254	38.4	254	38.5	<b>254</b>	<b>38.4</b>	215	45.4	<b>215</b>	<b>45.4</b>	215	45.4
401.bzip2	392	24.6	391	24.6	<b>392</b>	<b>24.6</b>	389	24.8	<b>388</b>	<b>24.9</b>	388	24.9
403.gcc	244	33.0	<b>243</b>	<b>33.1</b>	242	33.2	<b>236</b>	<b>34.0</b>	236	34.0	236	34.1
429.mcf	154	59.2	<b>154</b>	<b>59.4</b>	152	60.0	153	59.8	151	60.5	<b>152</b>	<b>60.2</b>
445.gobmk	444	23.6	436	24.1	<b>441</b>	<b>23.8</b>	370	28.3	371	28.3	<b>371</b>	<b>28.3</b>
456.hmmer	140	66.8	<b>140</b>	<b>66.9</b>	137	68.0	140	66.8	<b>140</b>	<b>66.9</b>	137	68.0
458.sjeng	380	31.9	<b>379</b>	<b>31.9</b>	379	32.0	373	32.5	373	32.4	<b>373</b>	<b>32.5</b>
462.libquantum	7.25	2860	7.24	2860	<b>7.25</b>	<b>2860</b>	7.25	2860	7.24	2860	<b>7.25</b>	<b>2860</b>
464.h264ref	<b>535</b>	<b>41.3</b>	541	40.9	530	41.8	<b>535</b>	<b>41.3</b>	541	40.9	530	41.8
471.omnetpp	<b>245</b>	<b>25.5</b>	245	25.5	247	25.3	163	38.3	<b>164</b>	<b>38.0</b>	165	37.9
473.astar	<b>214</b>	<b>32.8</b>	216	32.5	212	33.1	<b>214</b>	<b>32.8</b>	216	32.5	212	33.1
483.xalancbmk	112	61.5	111	62.4	<b>112</b>	<b>61.6</b>	<b>109</b>	<b>63.4</b>	109	63.4	109	63.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to HS

Set Hyper-Threading to Disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on localhost Wed Feb 5 14:01:52 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 57.6

Huawei RH1288 V3 (Intel Xeon E5-2640 v3)

SPECint\_base2006 = 53.7

CPU2006 license: 3175

Test date: Feb-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Platform Notes (Continued)

```
caution.)  
    cpu cores : 8  
    siblings   : 8  
    physical 0: cores 0 1 2 3 4 5 6 7  
    physical 1: cores 0 1 2 3 4 5 6 7  
    cache size : 20480 KB  
  
From /proc/meminfo  
MemTotal:      264277308 kB  
HugePages_Total:       0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
Red Hat Enterprise Linux Server release 6.5 (Santiago)  
  
From /etc/*release* /etc/*version*  
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server  
  
uname -a:  
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Feb 5 13:41  
  
SPEC is set to: /spec  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sdal      ext4  433G  107G  304G  27% /  
  
Additional information from dmidecode:  
BIOS Insyde Corp. 1.16 09/02/2014  
Memory:  
8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 1 rank  
8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank  
  
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 57.6**

Huawei RH1288 V3 (Intel Xeon E5-2640 v3)

**SPECint\_base2006 = 53.7**

CPU2006 license: 3175

Test date: Feb-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 57.6**

Huawei RH1288 V3 (Intel Xeon E5-2640 v3)

**SPECint\_base2006 = 53.7**

CPU2006 license: 3175

Test date: Feb-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 57.6

Huawei RH1288 V3 (Intel Xeon E5-2640 v3)

SPECint\_base2006 = 53.7

CPU2006 license: 3175

Test date: Feb-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:31:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.