



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 2610

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

SPECfp_rate_base2006 = 2560

CPU2006 license: 3175


Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

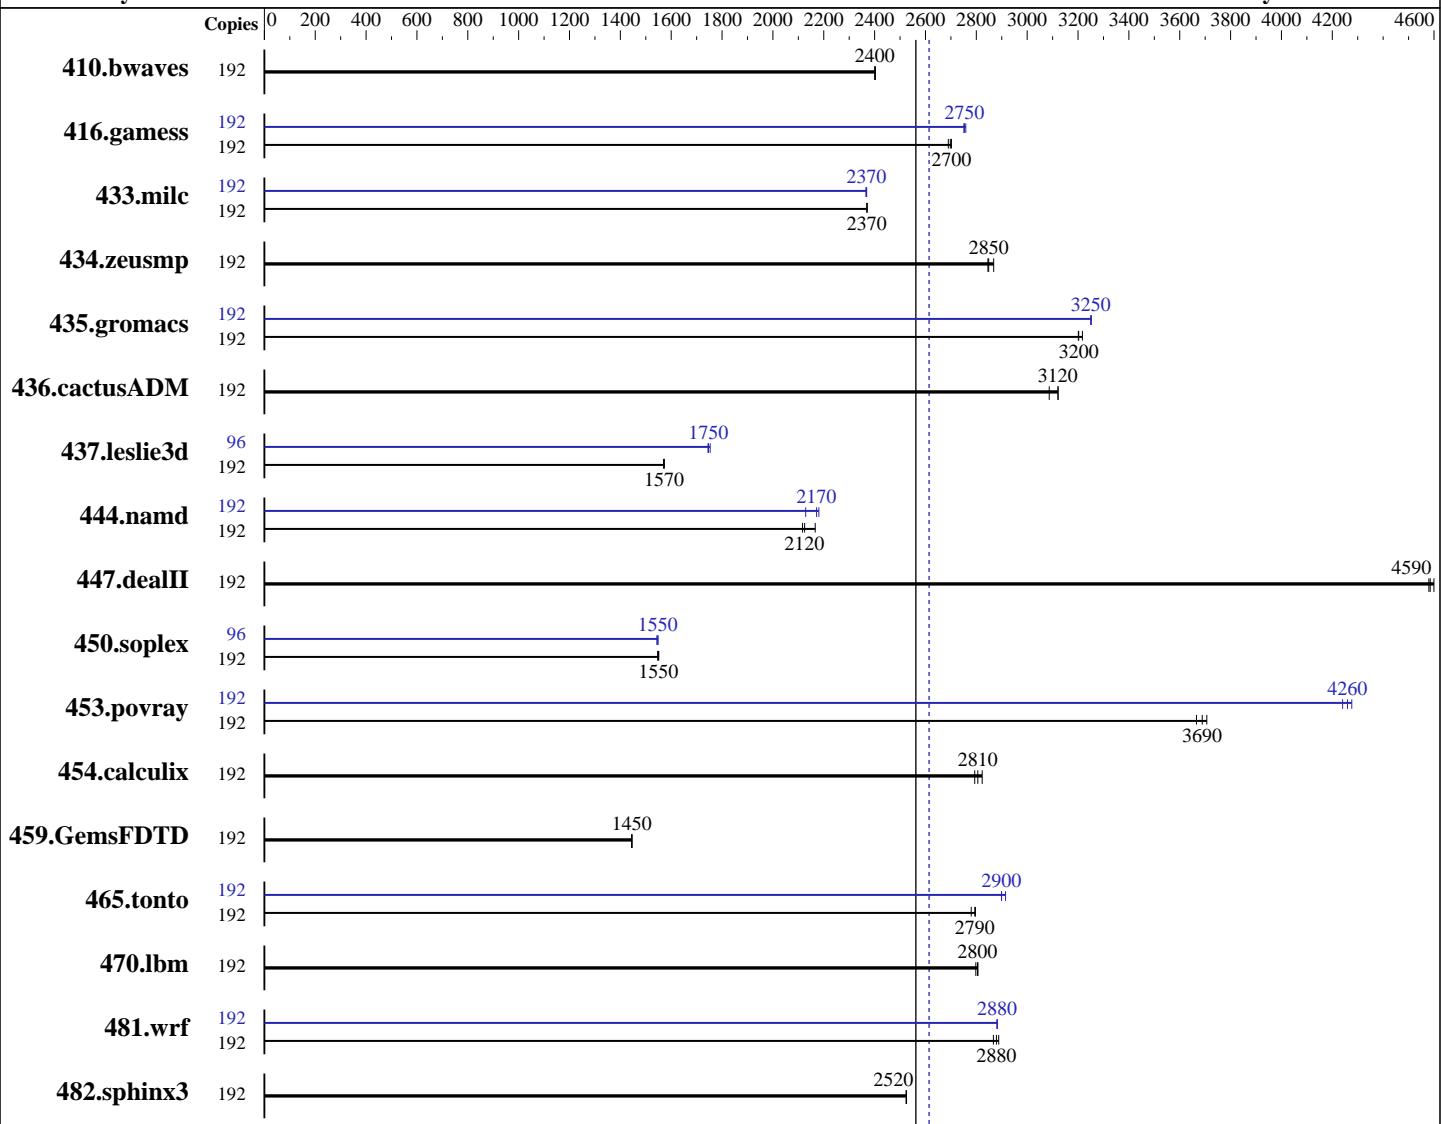

CPU Name: Intel Xeon E7-8850 v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 96 cores, 8 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 4,8 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Hardware

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
File System: Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Continued on next page

Software

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2610

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

SPECfp_rate_base2006 = 2560

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (128 x 8 GB 2Rx8 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	1087	2400	1087	2400	1086	2400	192	1087	2400	1087	2400	1086	2400
416.gamess	192	1394	2700	1398	2690	1391	2700	192	1363	2760	1365	2750	1367	2750
433.milc	192	744	2370	744	2370	744	2370	192	744	2370	744	2370	745	2370
434.zeusmp	192	609	2870	614	2850	613	2850	192	609	2870	614	2850	613	2850
435.gromacs	192	428	3200	426	3220	428	3200	192	422	3250	422	3250	422	3250
436.cactusADM	192	735	3120	735	3120	743	3090	192	735	3120	735	3120	743	3090
437.leslie3d	192	1147	1570	1150	1570	1148	1570	96	517	1750	515	1750	517	1740
444.namd	192	725	2120	711	2170	728	2120	192	709	2170	723	2130	706	2180
447.dealII	192	480	4580	479	4590	478	4600	192	480	4580	479	4590	478	4600
450.soplex	192	1033	1550	1032	1550	1035	1550	96	519	1540	518	1550	517	1550
453.povray	192	277	3690	276	3710	279	3670	192	239	4280	241	4240	240	4260
454.calculix	192	565	2810	567	2790	561	2820	192	565	2810	567	2790	561	2820
459.GemsFDTD	192	1409	1450	1411	1440	1409	1450	192	1409	1450	1411	1440	1409	1450
465.tonto	192	676	2790	676	2800	680	2780	192	648	2910	652	2900	652	2900
470.lbm	192	943	2800	941	2800	940	2810	192	943	2800	941	2800	940	2810
481.wrf	192	745	2880	748	2870	743	2890	192	744	2880	744	2880	744	2880
482.sphinx3	192	1482	2520	1482	2520	1482	2530	192	1482	2520	1482	2520	1482	2530

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2610

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

SPECfp_rate_base2006 = 2560

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
C-State disabled,C6 Enabled
Adjacent Sector Prefetch Enabled
Sysinfo program /spec/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on RH8100V3 Thu Oct 30 19:21:19 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8850 v2 @ 2.30GHz
 8 "physical id"s (chips)
 192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 12
 siblings : 24
 physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13
 physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 24576 KB

From /proc/meminfo
MemTotal: 1058584880 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux RH8100V3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 29 12:19

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2610

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

SPECfp_rate_base2006 = 2560

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

```
SPEC is set to: /spec
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        ext4  533G  190G  317G  38%  /
```

Additional information from dmidecode:

```
BIOS American Megatrends Inc. BLHSV027 10/24/2014
Memory:
128x    8 GB
128x Hynix HMT41GR7AFR8C-PB 8 GB 1333 MHz 2 rank
64x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 1 TB and the dmidecode description should have one line reading as:

```
128x Hynix HMT41GR7AFR8C-PB 8 GB 1333 MHz 2 rank
BIOS can support the memory running at 1333MHz on the E7-8850 v2, E7-4850 v2, E7-4830 v2, E7-4820 v2, E7-4809 v2 or E7-2850 v2 processors, the memory frequency can be set as 1333MHz by the function of POR+1 in BIOS version 025 with the latest Intel MRC(Memory Reference Code).
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/32:/spec/lib/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 2610

SPECfp_rate_base2006 = 2560

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2610

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

SPECfp_rate_base2006 = 2560

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 2610

SPECfp_rate_base2006 = 2560

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2610

Huawei RH8100 V3 (Intel Xeon E7-8850 v2)

SPECfp_rate_base2006 = 2560

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:33:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.