SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp®_rate2006 = 842

SPECfp_rate_base2006 = 822

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2013

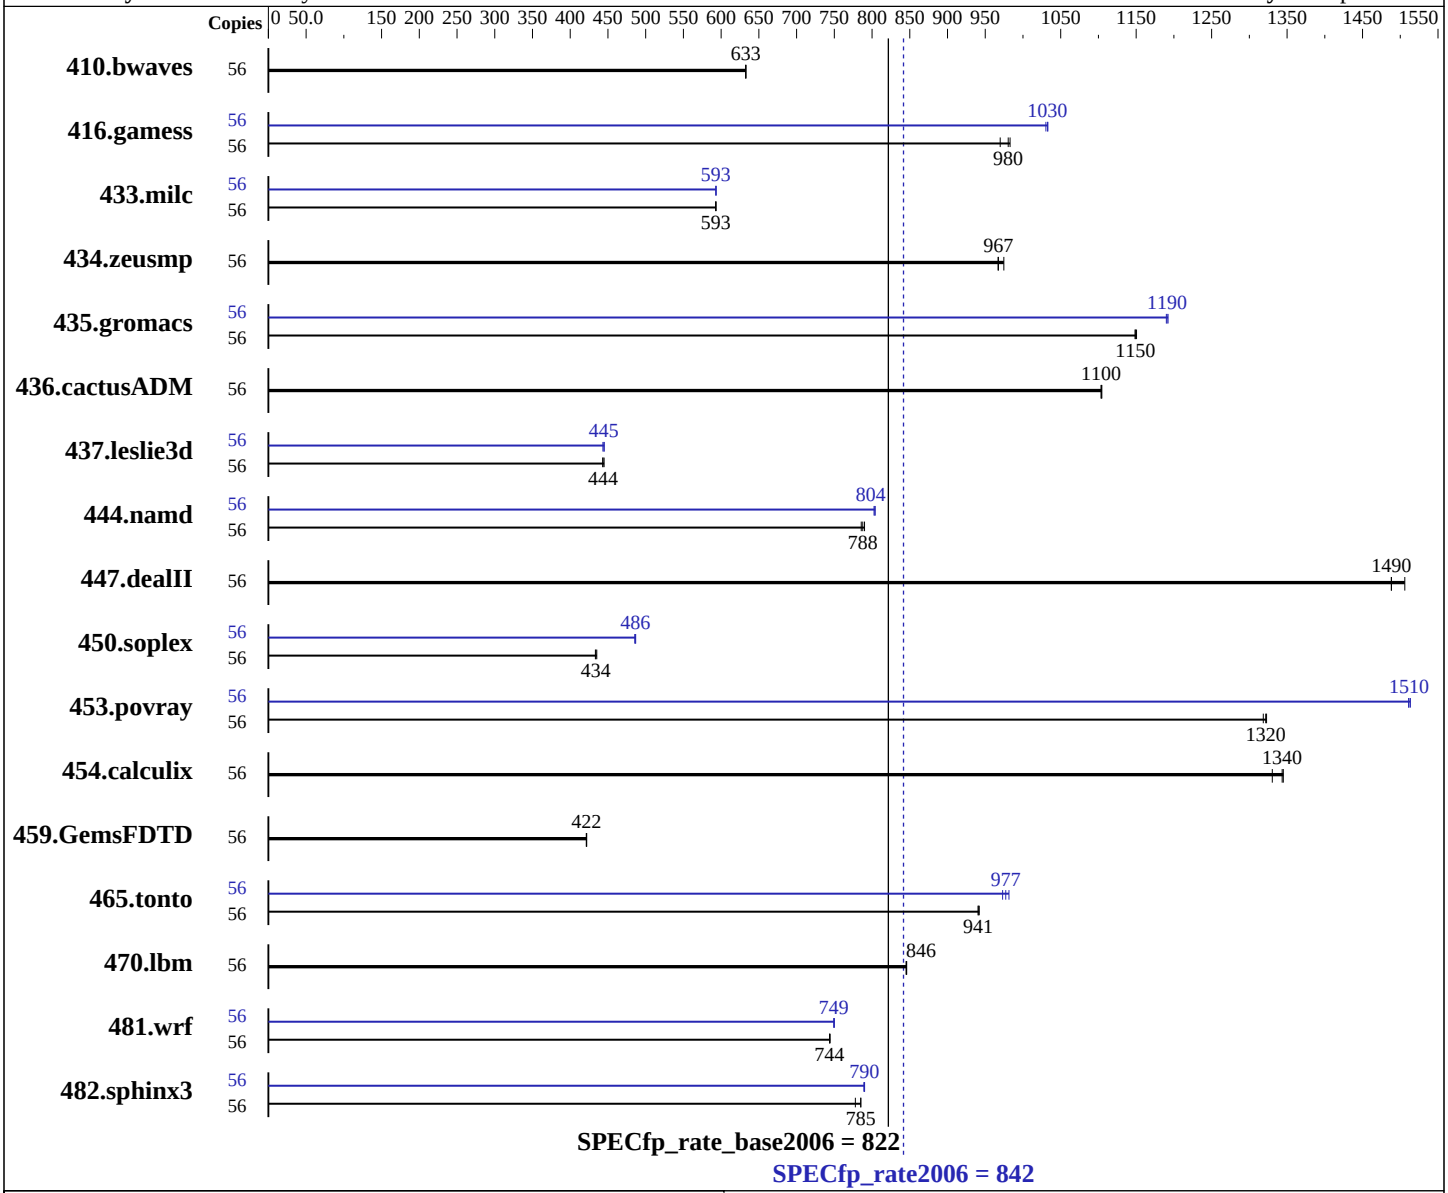

Hardware

CPU Name:	Intel Xeon E5-2695 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 842

SPECfp_rate_base2006 = 822

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2013

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 300GB SAS, 15K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1203	633	1203	633	**1203**	**633**	56	1203	633	1203	633	**1203**	**633**
416.gamess	56	**1118**	**980**	1116	983	1131	970	56	**1062**	**1030**	1064	1030	1062	1030
433.milc	56	867	593	867	593	**867**	**593**	56	867	593	867	593	**867**	**593**
434.zeusmp	56	**527**	**967**	523	975	527	967	56	**527**	**967**	523	975	527	967
435.gromacs	56	348	1150	**348**	**1150**	348	1150	56	336	1190	335	1190	**336**	**1190**
436.cactusADM	56	606	1100	**606**	**1100**	606	1100	56	606	1100	**606**	**1100**	606	1100
437.leslie3d	56	1188	443	**1187**	**444**	1183	445	56	**1184**	**445**	1187	443	1183	445
444.namd	56	**570**	**788**	568	790	572	786	56	**559**	**804**	560	803	559	804
447.dealII	56	425	1510	**430**	**1490**	430	1490	56	425	1510	**430**	**1490**	430	1490
450.soplex	56	1073	435	**1076**	**434**	1078	433	56	960	487	962	486	**960**	**486**
453.povray	56	225	1320	226	1320	**225**	**1320**	56	**197**	**1510**	197	1510	197	1510
454.calculix	56	**344**	**1340**	347	1330	343	1350	56	**344**	**1340**	347	1330	343	1350
459.GemsFDTD	56	1409	422	**1409**	**422**	1410	421	56	1409	422	**1409**	**422**	1410	421
465.tonto	56	**586**	**941**	586	941	585	942	56	566	973	561	981	**564**	**977**
470.lbm	56	910	845	**910**	**846**	910	846	56	910	845	**910**	**846**	910	846
481.wrf	56	840	744	841	744	**841**	**744**	56	834	750	**835**	**749**	835	749
482.sphinx3	56	1390	785	**1390**	**785**	1403	778	56	1381	790	**1382**	**790**	1383	789

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
CPU performance set to HPC
Power Technology set to Custom
Processor Power State C6 set to Disabled
```

Continued on next page

Platform Notes (Continued)

```
Energy Performance BIAS setting set to Performance
Memory RAS configuration set to Maximum Performance
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on rhel65 Fri Nov  7 22:51:25 2014

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz
       2 "physical id"s (chips)
       56 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 14
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 17920 KB

 From /proc/meminfo
    MemTotal:       264255336 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.5 (Santiago)

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux rhel65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Nov 7 11:15

 SPEC is set to: /opt/cpu2006-1.2
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdb1      ext4  245G   66G  167G  29% /

 Additional information from dmidecode:
   BIOS Cisco Systems, Inc. C240M4.2.0.3c.0.091920142008 09/19/2014
   Memory:
    16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
    8x NO DIMM NO DIMM
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 842

SPECfp_rate_base2006 = 822

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 3 10:34:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.