SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML150 Gen9
(2.60 GHz, Intel Xeon E5-2660 v3)

SPECfp®_rate2006 = 722

SPECfp_rate_base2006 = 703

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

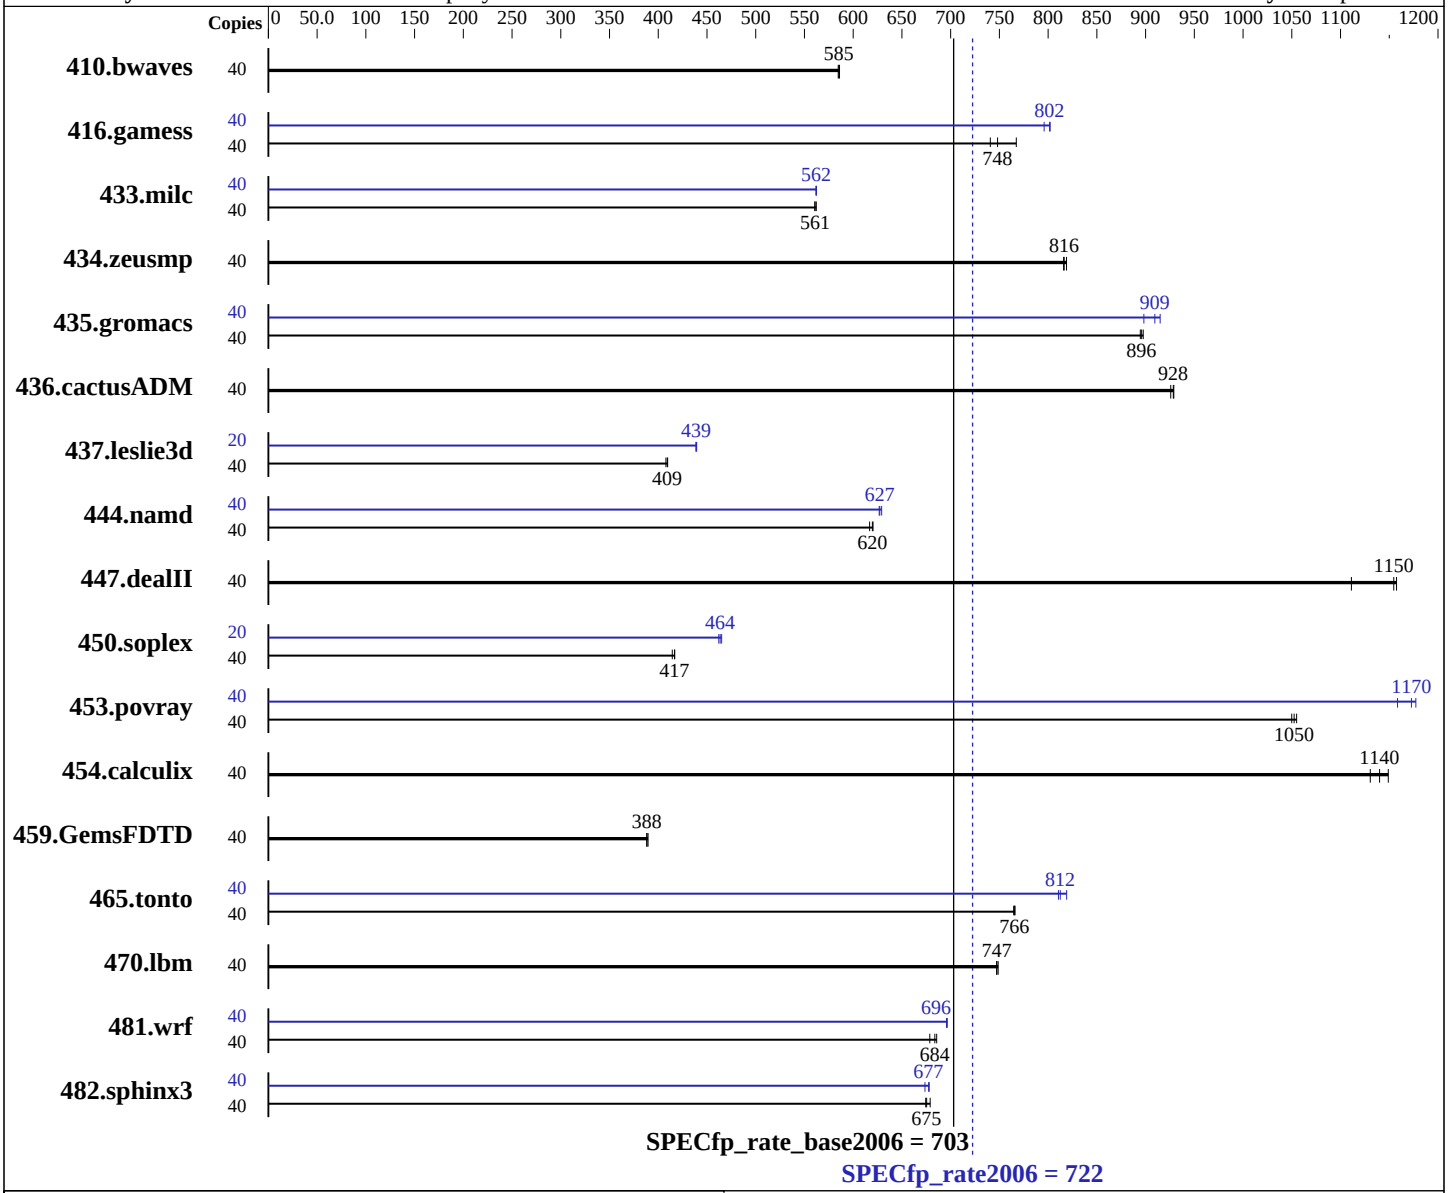

Hardware

CPU Name:	Intel Xeon E5-2660 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML150 Gen9
(2.60 GHz, Intel Xeon E5-2660 v3)

SPECfp_rate2006 = 722

SPECfp_rate_base2006 = 703

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 400 GB SATA SSD, RAID 0
Other Hardware:	None

System State:	Run level 3 (mutli-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	928	586	**929**	**585**	930	585	40	928	586	**929**	**585**	930	585
416.gamess	40	1057	741	1021	767	**1047**	**748**	40	976	802	984	796	**977**	**802**
433.milc	40	**655**	**561**	653	562	655	561	40	653	562	**653**	**562**	654	562
434.zeusmp	40	446	816	445	819	**446**	**816**	40	446	816	445	819	**446**	**816**
435.gromacs	40	318	898	**319**	**896**	319	895	40	312	915	318	898	**314**	**909**
436.cactusADM	40	516	926	515	929	**515**	**928**	40	516	926	515	929	**515**	**928**
437.leslie3d	40	922	408	918	410	**919**	**409**	20	**428**	**439**	429	439	428	439
444.namd	40	517	620	**518**	**620**	520	617	40	510	629	512	627	**511**	**627**
447.dealII	40	395	1160	412	1110	**396**	**1150**	40	395	1160	412	1110	**396**	**1150**
450.soplex	40	800	417	805	414	**801**	**417**	20	359	465	361	462	**360**	**464**
453.povray	40	**202**	**1050**	203	1050	202	1050	40	181	1180	**181**	**1170**	184	1160
454.calculix	40	292	1130	287	1150	**289**	**1140**	40	292	1130	287	1150	**289**	**1140**
459.GemsFDTD	40	1093	388	**1093**	**388**	1090	390	40	1093	388	**1093**	**388**	1090	390
465.tonto	40	514	766	**514**	**766**	515	765	40	481	819	**484**	**812**	486	811
470.lbm	40	736	747	**735**	**747**	734	749	40	736	747	**735**	**747**	734	749
481.wrf	40	**653**	**684**	652	686	658	679	40	642	696	642	696	**642**	**696**
482.sphinx3	40	**1154**	**675**	1148	679	1156	674	40	1150	678	**1151**	**677**	1157	674

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
 BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator set to HP Static High Performance Mode
  Minimum Processor Idle Power Package C-State set to No Package State
  Energy/Performance Bias set to Maximum Performance
  QPI Snoop Configuration set to Cluster on Die
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utlization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh

  Sysinfo program /cpu2006/config/sysinfo.rev6914
  $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
  running on DL80-Gen9 Tue Nov  4 01:29:33 2014

  This section contains SUT (System Under Test) info as seen by
  some common utilities.  To remove or add to this section, see:
    http://www.spec.org/cpu2006/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
        2 "physical id"s (chips)
        40 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 5
        siblings  : 10
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
     cache size : 12800 KB

  From /proc/meminfo
     MemTotal:       131731752 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

  uname -a:
     Linux DL80-Gen9 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
```

Continued on next page

Platform Notes (Continued)

```
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Nov 3 12:37

   SPEC is set to: /cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda4      xfs   368G   11G  357G   3% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS HP P95 08/26/2014
     Memory:
      8x HP 752369-081 16 GB 2 rank 2133 MHz
      8x UNKNOWN NOT AVAILABLE

   (End of data from sysinfo program)
  Regarding the sysinfo display about the memory installed, the correct amount of
  memory is 128 GB and the dmidecode description should have one line reading as:
   8x HP 752369-081 16 GB 2 rank 2133 MHz
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

  Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
  memory using RedHat EL 7.0
```

Base Compiler Invocation

C benchmarks:
```
     icc   -m64
```

C++ benchmarks:
```
     icpc  -m64
```

Fortran benchmarks:
```
     ifort -m64
```

Benchmarks using both Fortran and C:
```
     icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Dec 15 14:30:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.