SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

HA8000-bd (Intel Core i3-4150T)

SPECfp®2006 = 57.0

SPECfp_base2006 = 56.1

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Sep-2014
Hardware Availability: Oct-2014
Software Availability: Feb-2013

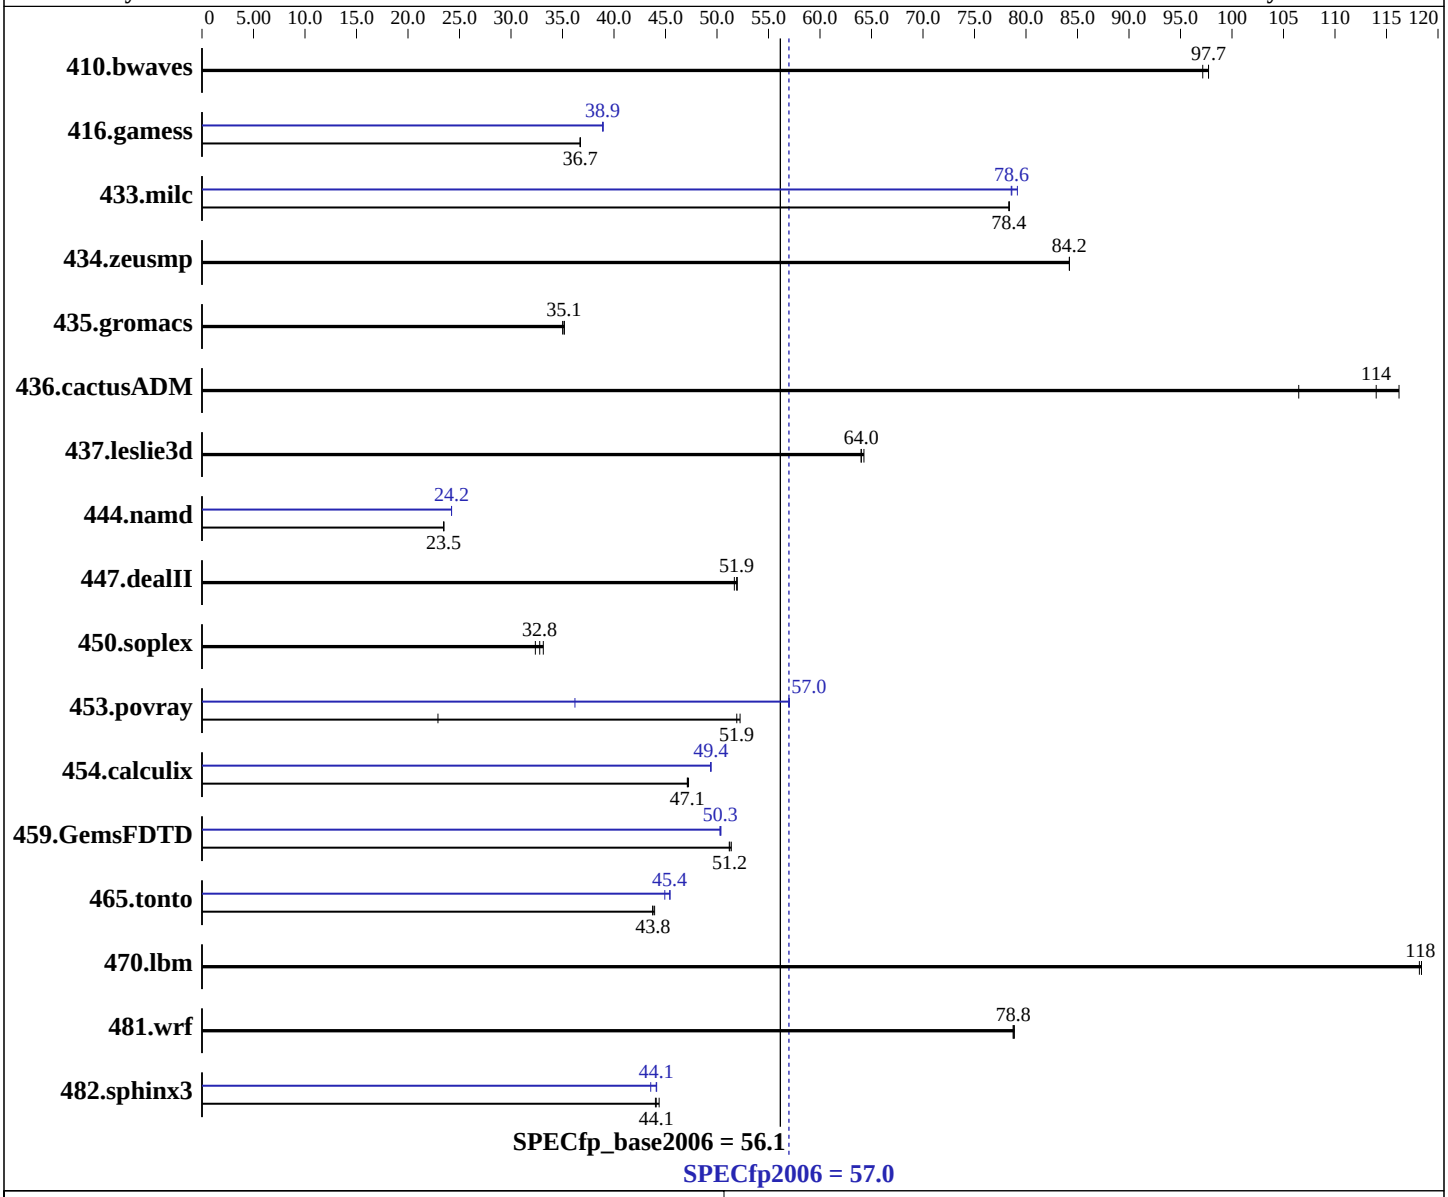

Hardware

CPU Name:	Intel Core i3-4150T
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

HA8000-bd (Intel Core i3-4150T)

SPECfp2006 = 57.0

SPECfp_base2006 = 56.1

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Sep-2014
Hardware Availability: Oct-2014
Software Availability: Feb-2013

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x 1000 GB SATA, 7200RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	140	97.2	**139**	**97.7**	139	97.7	140	97.2	**139**	**97.7**	139	97.7
416.gamess	533	36.7	**533**	**36.7**	533	36.7	**503**	**38.9**	503	39.0	503	38.9
433.milc	**117**	**78.4**	117	78.4	117	78.3	**117**	**78.6**	117	78.6	116	79.2
434.zeusmp	**108**	**84.2**	108	84.2	108	84.2	**108**	**84.2**	108	84.2	108	84.2
435.gromacs	**203**	**35.1**	203	35.2	204	35.0	**203**	**35.1**	203	35.2	204	35.0
436.cactusADM	112	106	**105**	**114**	103	116	112	106	**105**	**114**	103	116
437.leslie3d	147	64.0	**147**	**64.0**	146	64.3	147	64.0	**147**	**64.0**	146	64.3
444.namd	**342**	**23.5**	342	23.5	342	23.5	**331**	**24.2**	331	24.2	331	24.2
447.dealII	221	51.7	220	52.0	**220**	**51.9**	221	51.7	220	52.0	**220**	**51.9**
450.soplex	258	32.4	252	33.1	**254**	**32.8**	258	32.4	252	33.1	**254**	**32.8**
453.povray	**102**	**51.9**	102	52.2	232	22.9	**93.4**	**57.0**	147	36.2	93.3	57.0
454.calculix	175	47.2	175	47.1	**175**	**47.1**	167	49.4	167	49.4	**167**	**49.4**
459.GemsFDTD	**207**	**51.2**	206	51.4	207	51.2	211	50.4	**211**	**50.3**	211	50.3
465.tonto	225	43.7	**225**	**43.8**	224	43.9	217	45.4	219	44.9	**217**	**45.4**
470.lbm	**116**	**118**	116	118	116	118	**116**	**118**	116	118	116	118
481.wrf	142	78.8	142	78.9	**142**	**78.8**	142	78.8	142	78.9	**142**	**78.8**
482.sphinx3	439	44.4	443	44.0	**442**	**44.1**	442	44.1	447	43.6	**442**	**44.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/user/cpu2006/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Sep 10 02:28:51 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Core(TM) i3-4150T CPU @ 3.00GHz
```

Continued on next page

Platform Notes (Continued)

```
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 2
      siblings  : 4
      physical 0: cores 0 1
   cache size : 3072 KB

From /proc/meminfo
   MemTotal:       32827836 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
   EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 8 19:49

SPEC is set to: /home/user/cpu2006/cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/VolGroup-lv_home
                  ext4     20G   16G  3.9G  80% /home

Additional information from dmidecode:
  BIOS American Megatrends Inc. P2_03 09/04/2014
  Memory:
   4x   8 GB
   4x 1323 SMD3L-N8G28HA-16K 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/user/cpu2006/cpu2006/libs/32:/home/user/cpu2006/cpu2006/libs/64:/home/user/cpu2006/cpu2006/sh"
OMP_NUM_THREADS = "2"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
```

Continued on next page

General Notes (Continued)

```
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html
http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml
http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 16 13:09:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 December 2014.