SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288A V2 (Intel Xeon E5-2658 v2)

SPECfp®_rate2006 = 568

SPECfp_rate_base2006 = 554

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

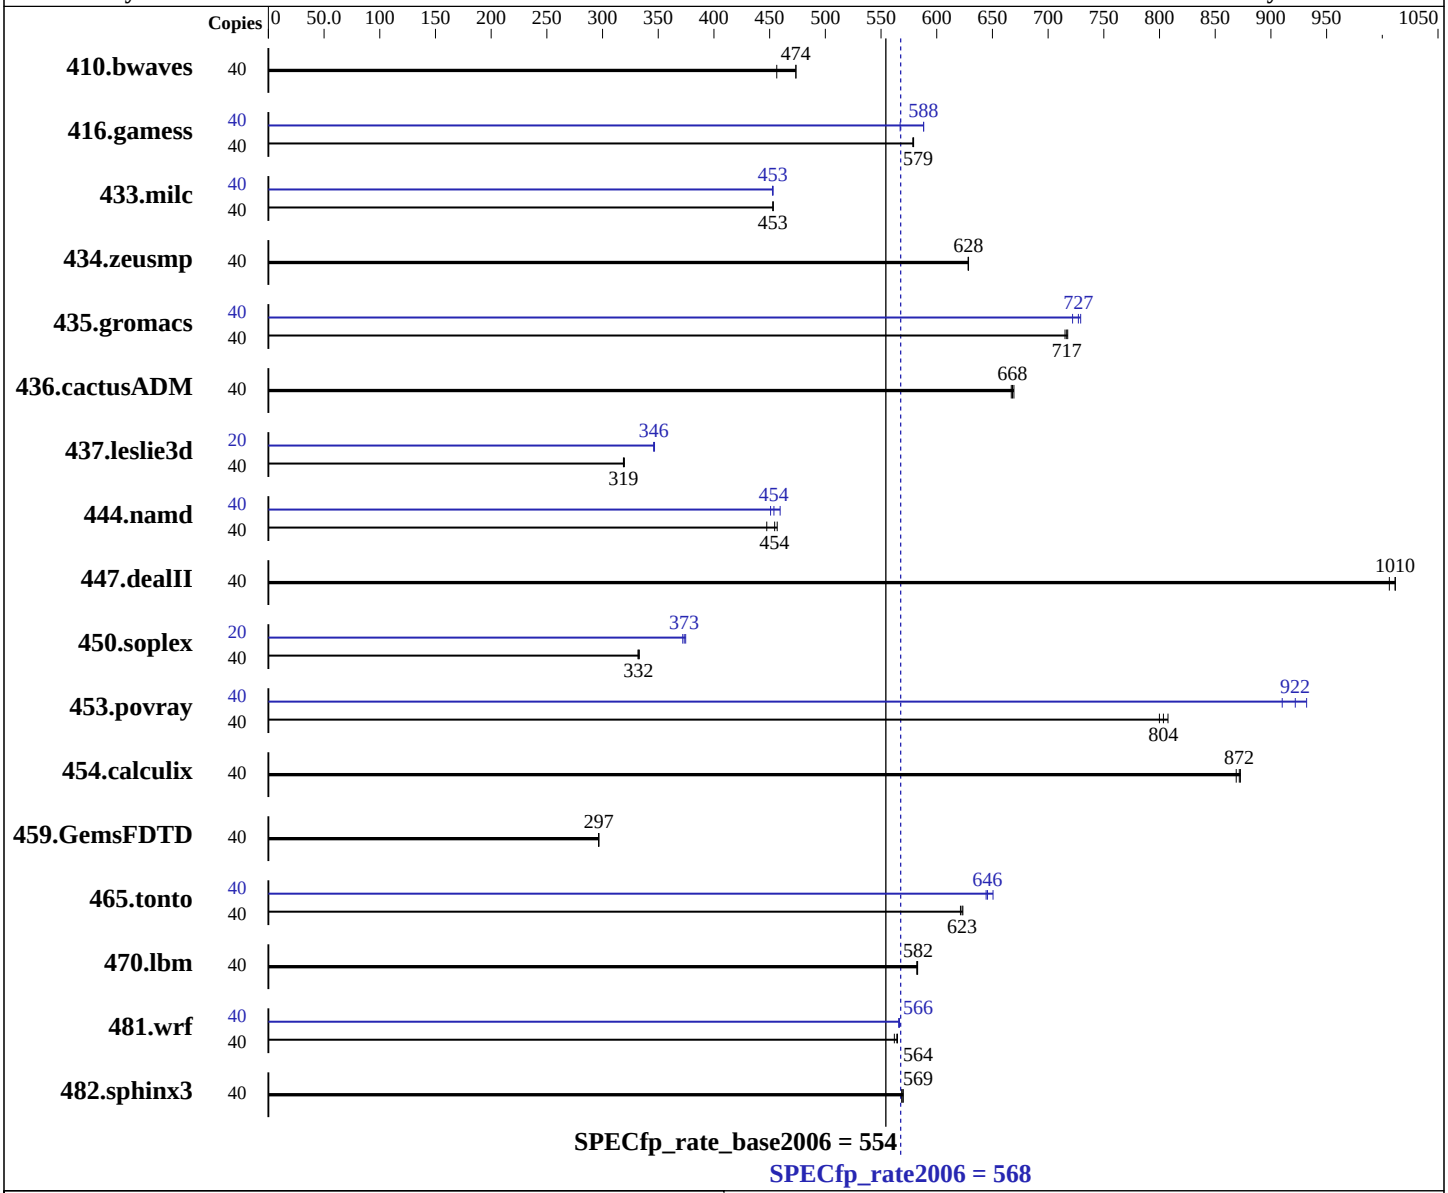

Hardware

CPU Name:	Intel Xeon E5-2658 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288A V2 (Intel Xeon E5-2658 v2)

SPECfp_rate2006 = 568

SPECfp_rate_base2006 = 554

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1148	474	**1148**	**474**	1191	456	40	1148	474	**1148**	**474**	1191	456
416.gamess	40	1352	579	1354	579	**1352**	**579**	40	1381	567	**1331**	**588**	1331	588
433.milc	40	811	453	810	453	**811**	**453**	40	811	453	**811**	**453**	811	453
434.zeusmp	40	579	628	**579**	**628**	579	629	40	579	628	**579**	**628**	579	629
435.gromacs	40	399	715	398	718	**399**	**717**	40	392	729	**393**	**727**	396	722
436.cactusADM	40	714	669	**716**	**668**	717	667	40	714	669	**716**	**668**	717	667
437.leslie3d	40	**1179**	**319**	1180	319	1176	320	20	**543**	**346**	542	347	543	346
444.namd	40	717	447	**706**	**454**	702	457	40	**707**	**454**	698	459	712	451
447.dealII	40	**452**	**1010**	452	1010	455	1010	40	**452**	**1010**	452	1010	455	1010
450.soplex	40	1002	333	**1004**	**332**	1005	332	20	448	372	445	375	**447**	**373**
453.povray	40	**265**	**804**	263	808	266	800	40	**231**	**922**	234	910	228	932
454.calculix	40	378	873	**379**	**872**	380	869	40	378	873	**379**	**872**	380	869
459.GemsFDTD	40	1431	297	1431	297	**1431**	**297**	40	1431	297	1431	297	**1431**	**297**
465.tonto	40	634	621	631	623	**632**	**623**	40	611	644	**610**	**646**	605	651
470.lbm	40	943	583	**944**	**582**	944	582	40	943	583	**944**	**582**	944	582
481.wrf	40	**792**	**564**	791	565	795	562	40	789	567	789	566	**789**	**566**
482.sphinx3	40	1368	570	1371	569	**1370**	**569**	40	1368	570	1371	569	**1370**	**569**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Baseboard Management Controller used to adjust the fan speed to 100%
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost Mon Sep 15 16:36:53 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2658 v2 @ 2.40GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       132103760 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 15 03:31

SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4  439G   81G  336G  20% /

Additional information from dmidecode:
  BIOS Insyde Corp. RMIBV388 08/09/2014
  Memory:
   8x Samsung M393B2G70QH0-CMA 16 GB 1866 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 The Huawei RH2288A V2 and Huawei RH1288A V2
 are electronically equivalent.
 The results have been measured on a Huawei RH2288A V2 model
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Peak Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:11:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.