SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECfp®_rate2006 = 949

SPECfp_rate_base2006 = 921

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Dec-2014
Hardware Availability: Nov-2014
Software Availability: Sep-2014

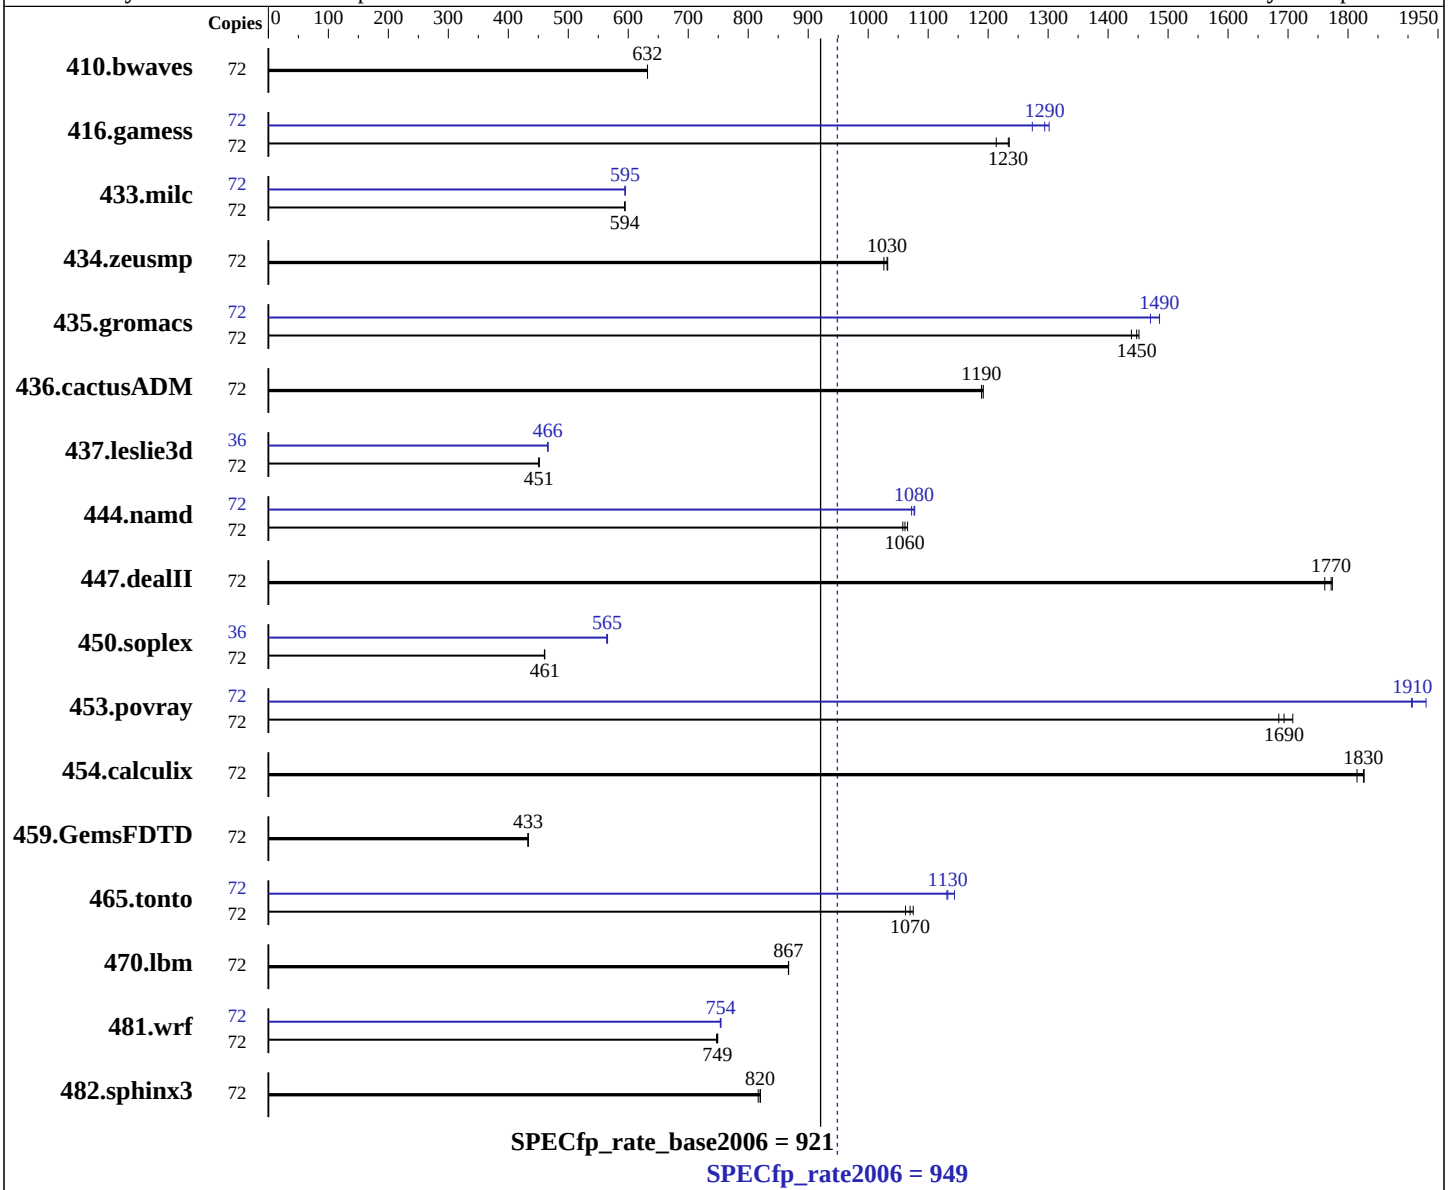

Hardware

CPU Name:	Intel Xeon E5-2699 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo NeXtScale nx360 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECfp_rate2006 = 949

SPECfp_rate_base2006 = 921

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Dec-2014
Hardware Availability: Nov-2014
Software Availability: Sep-2014

L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	1548	632	1548	632	**1548**	**632**	72	1548	632	1548	632	**1548**	**632**
416.gamess	72	**1143**	**1230**	1162	1210	1141	1240	72	1083	1300	**1089**	**1290**	1107	1270
433.milc	72	1112	594	1112	594	**1112**	**594**	72	**1111**	**595**	1111	595	1112	595
434.zeusmp	72	**635**	**1030**	635	1030	638	1030	72	**635**	**1030**	635	1030	638	1030
435.gromacs	72	357	1440	**355**	**1450**	354	1450	72	346	1490	**346**	**1490**	350	1470
436.cactusADM	72	**724**	**1190**	722	1190	724	1190	72	**724**	**1190**	722	1190	724	1190
437.leslie3d	72	1502	451	**1500**	**451**	1499	452	36	726	466	**726**	**466**	727	466
444.namd	72	542	1070	546	1060	**544**	**1060**	72	536	1080	538	1070	**536**	**1080**
447.dealII	72	464	1770	468	1760	**465**	**1770**	72	464	1770	468	1760	**465**	**1770**
450.soplex	72	1303	461	1305	460	**1304**	**461**	36	**531**	**565**	531	565	532	564
453.povray	72	227	1680	**226**	**1690**	224	1710	72	198	1930	201	1910	**201**	**1910**
454.calculix	72	327	1810	325	1830	**325**	**1830**	72	327	1810	325	1830	**325**	**1830**
459.GemsFDTD	72	**1764**	**433**	1763	433	1765	433	72	**1764**	**433**	1763	433	1765	433
465.tonto	72	659	1080	**662**	**1070**	667	1060	72	619	1140	**625**	**1130**	626	1130
470.lbm	72	1141	867	**1141**	**867**	1141	867	72	1141	867	**1141**	**867**	1141	867
481.wrf	72	**1074**	**749**	1076	747	1074	749	72	**1066**	**754**	1067	753	1066	754
482.sphinx3	72	**1712**	**820**	1718	817	1711	820	72	**1712**	**820**	1718	817	1711	820

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS setting:
Operating Mode set to "Efficiency-Favor Performance"
COD Preference set to Enable
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /root/SPECCpu2014Sep01/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on nx360M5-01 Mon Dec  8 15:15:36 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
      2 "physical id"s (chips)
      72 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 23040 KB

From /proc/meminfo
   MemTotal:       264134236 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux nx360M5-01 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 8 15:12

SPEC is set to: /root/SPECCpu2014Sep01
   Filesystem                Type  Size  Used Avail Use% Mounted on
   /dev/mapper/VolGroup-lv_root ext4  454G   82G  350G  19% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS IBM -[THE103F-1.03]- 11/25/2014
  Memory:
```

Continued on next page

Platform Notes (Continued)

```
      10x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
      6x Hynix HMA42GR7MFR4N-TFT 16 GB 2 rank 2133 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/SPECCpu2014Sep01/libs/32:/root/SPECCpu2014Sep01/libs/64:/root/SPECCpu2014Sep01/sh"
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.20141230.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.20141230.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:13:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.