SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp®_rate2006 = 6900

SPECfp_rate_base2006 = 6770

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Dec-2014
Hardware Availability: Dec-2014
Software Availability: Nov-2014

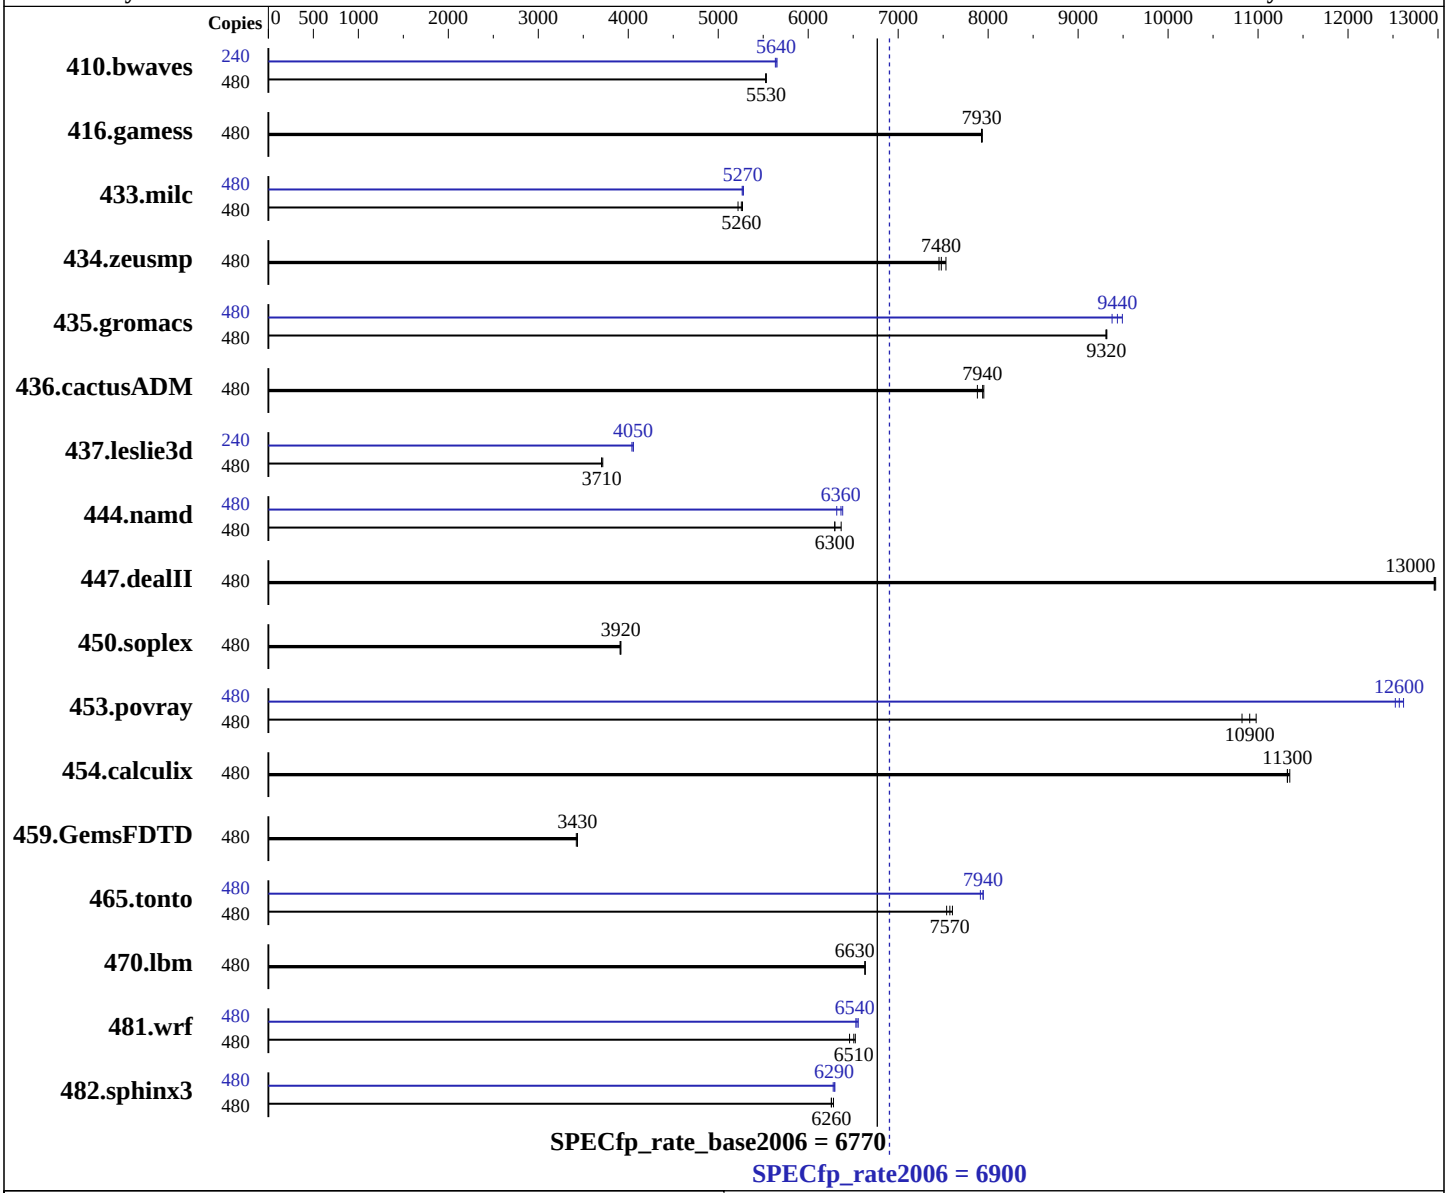

Hardware

CPU Name:	Intel Xeon E7-8890 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	240 cores, 16 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	4-32 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP3, Kernel 3.0.101-0.46-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate2006 = 6900

SPECfp_rate_base2006 = 6770

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Dec-2014
Hardware Availability: Dec-2014
Software Availability: Nov-2014

L3 Cache: 37.5 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (256 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem: 2 TB tmpfs
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SGI Foundation Software 2.11, Build 711rp42.sles11sp3-1412152100

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	480	**1179**	**5530**	1180	5530	1179	5530	240	579	5630	577	5650	**578**	**5640**
416.gamess	480	**1185**	**7930**	1186	7930	1184	7940	480	**1185**	**7930**	1186	7930	1184	7940
433.milc	480	836	5270	844	5220	**838**	**5260**	480	**835**	**5270**	837	5270	835	5280
434.zeusmp	480	580	7530	**584**	**7480**	586	7450	480	580	7530	**584**	**7480**	586	7450
435.gromacs	480	**368**	**9320**	368	9320	368	9310	480	365	9380	**363**	**9440**	361	9490
436.cactusADM	480	721	7950	**723**	**7940**	728	7880	480	721	7950	**723**	**7940**	728	7880
437.leslie3d	480	1219	3700	1214	3720	**1218**	**3710**	240	**556**	**4050**	556	4060	558	4040
444.namd	480	605	6370	**611**	**6300**	612	6290	480	603	6380	609	6320	**605**	**6360**
447.dealII	480	**424**	**13000**	423	13000	424	13000	480	**424**	**13000**	423	13000	424	13000
450.soplex	480	**1022**	**3920**	1022	3920	1024	3910	480	**1022**	**3920**	1022	3920	1024	3910
453.povray	480	**234**	**10900**	236	10800	233	11000	480	**203**	**12600**	204	12500	202	12600
454.calculix	480	**350**	**11300**	349	11400	350	11300	480	**350**	**11300**	349	11400	350	11300
459.GemsFDTD	480	**1483**	**3430**	1488	3420	1483	3430	480	**1483**	**3430**	1488	3420	1483	3430
465.tonto	480	621	7600	**624**	**7570**	627	7540	480	597	7910	**595**	**7940**	595	7940
470.lbm	480	**994**	**6630**	995	6630	994	6630	480	**994**	**6630**	995	6630	994	6630
481.wrf	480	830	6460	822	6520	**824**	**6510**	480	821	6530	818	6560	**820**	**6540**
482.sphinx3	480	1495	6260	**1495**	**6260**	1489	6280	480	1486	6300	1490	6280	**1487**	**6290**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem set up with:
  mkdir -p /mnt/shm
  mount -t tmpfs -o size=2048g,rw tmpfs /mnt/shm/

Turbo mode activated with:
```

Continued on next page

Operating System Notes (Continued)

```
modprobe acpi_cpufreq
cpupower frequency-set -u 3400MHz -d 3400MHz -g performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/mnt/shm/cpu2006-1.2/libs/32:/mnt/shm/cpu2006-1.2/libs/64:/mnt/shm/cpu2006-1.2/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -xAVX -prof-gen(pass 1) -ipo -O3 -no-prec-div -opt-mem-layout-trans=3 -prof-use(pass 2) -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.html
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.xml
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:29:49 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.