# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp®_rate2006 = 852

SPECfp_rate_base2006 = 827

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014
**Hardware Availability:** Sep-2014
**Software Availability:** Jan-2014

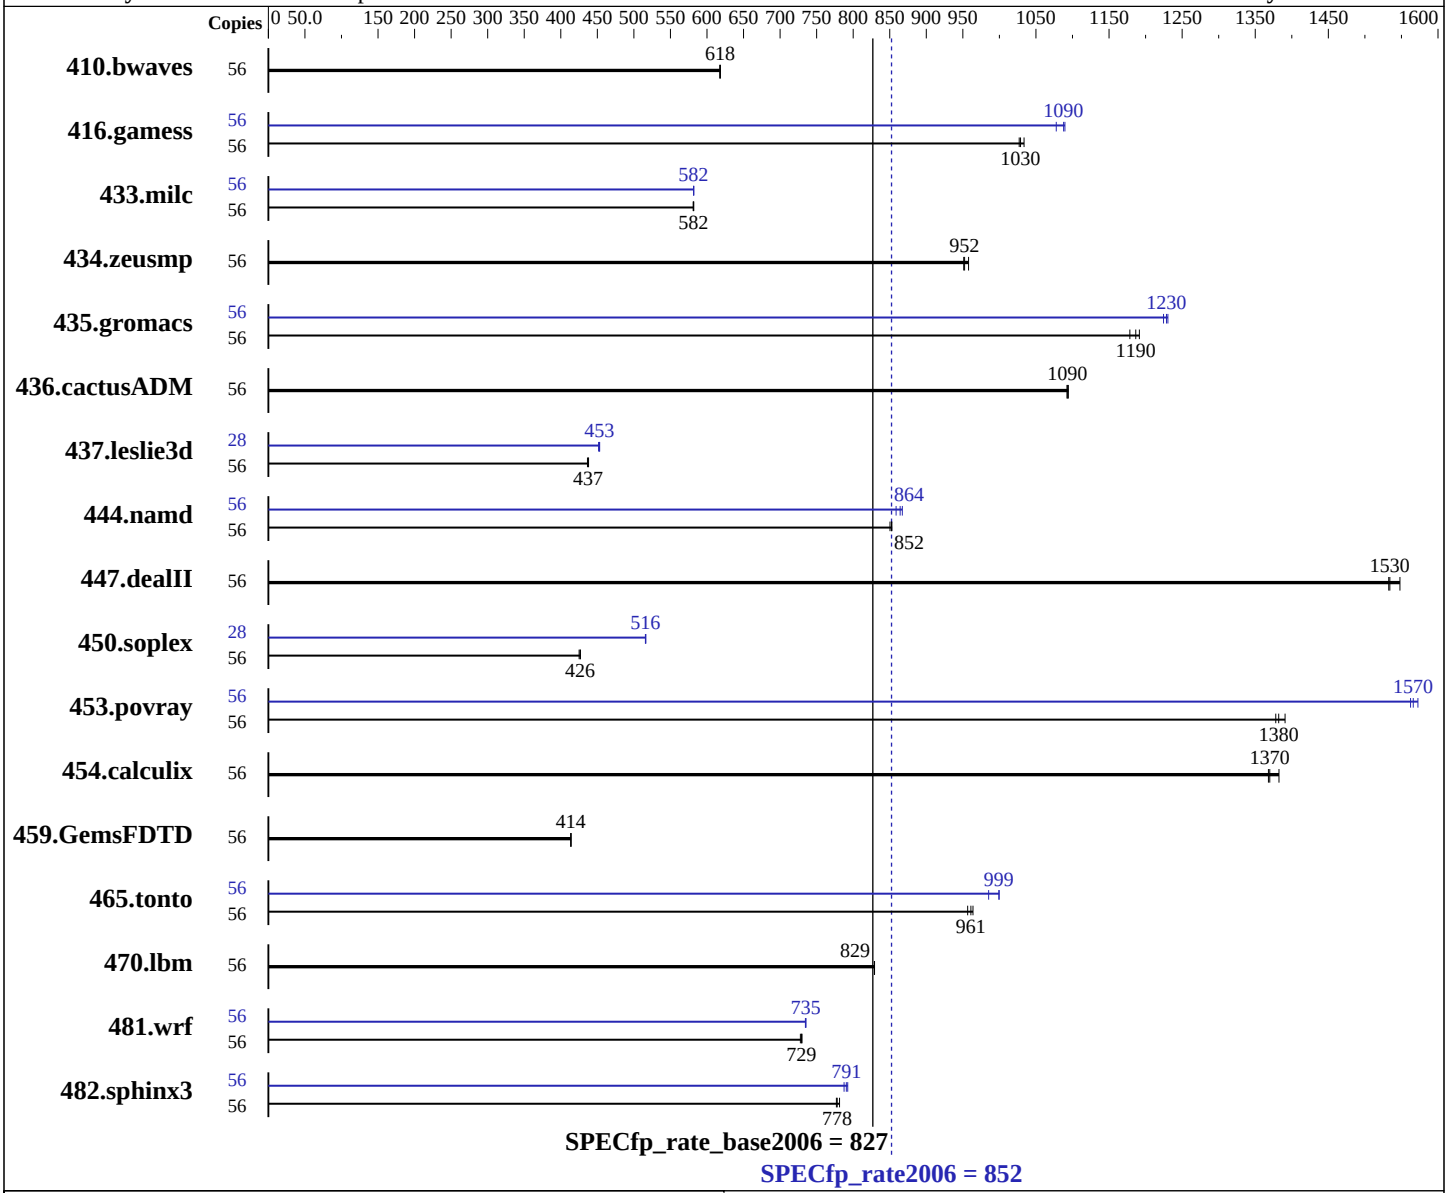


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2697 v3 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.60 GHz |
| CPU MHz: | 2600 |
| FPU: | Integrated |
| CPU(s) enabled: | 28 cores, 2 chips, 14 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1,2 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |

Continued on next page

## Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.5 (Santiago)<br>2.6.32-431.el6.x86_64 |
| Compiler: | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;<br>Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux |
| Auto Parallel: | No |
| File System: | ext4 |

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 852

SPECfp_rate_base2006 = 827

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014
**Hardware Availability:** Sep-2014
**Software Availability:** Jan-2014

| | |
|---|---|
| L3 Cache: | 35 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R) |
| Disk Subsystem: | 1 x 240 GB SATA SSD |
| Other Hardware: | None |

| | |
|---|---|
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | None |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 56 | 1232 | 618 | **1232** | **618** | 1231 | 618 | 56 | 1232 | 618 | **1232** | **618** | 1231 | 618 |
| 416.gamess | 56 | 1068 | 1030 | **1066** | **1030** | 1061 | 1030 | 56 | 1006 | 1090 | **1008** | **1090** | 1017 | 1080 |
| 433.milc | 56 | 885 | 581 | 884 | 582 | **884** | **582** | 56 | 884 | 582 | **884** | **582** | 883 | 582 |
| 434.zeusmp | 56 | 532 | 958 | 536 | 951 | **535** | **952** | 56 | 532 | 958 | 536 | 951 | **535** | **952** |
| 435.gromacs | 56 | **337** | **1190** | 336 | 1190 | 339 | 1180 | 56 | 327 | 1220 | 325 | 1230 | **325** | **1230** |
| 436.cactusADM | 56 | 612 | 1090 | **612** | **1090** | 613 | 1090 | 56 | 612 | 1090 | **612** | **1090** | 613 | 1090 |
| 437.leslie3d | 56 | **1203** | **437** | 1206 | 437 | 1202 | 438 | 28 | 583 | 452 | **581** | **453** | 581 | 453 |
| 444.namd | 56 | 527 | 853 | **527** | **852** | 528 | 850 | 56 | **520** | **864** | 523 | 859 | 518 | 867 |
| 447.dealII | 56 | 418 | 1530 | **418** | **1530** | 414 | 1550 | 56 | 418 | 1530 | **418** | **1530** | 414 | 1550 |
| 450.soplex | 56 | **1095** | **426** | 1094 | 427 | 1099 | 425 | 28 | 453 | 516 | **453** | **516** | 452 | 516 |
| 453.povray | 56 | 216 | 1380 | 214 | 1390 | **216** | **1380** | 56 | **190** | **1570** | 191 | 1560 | 189 | 1570 |
| 454.calculix | 56 | 338 | 1370 | **337** | **1370** | 334 | 1380 | 56 | 338 | 1370 | **337** | **1370** | 334 | 1380 |
| 459.GemsFDTD | 56 | 1435 | 414 | **1436** | **414** | 1436 | 414 | 56 | 1435 | 414 | **1436** | **414** | 1436 | 414 |
| 465.tonto | 56 | 572 | 964 | 576 | 957 | **573** | **961** | 56 | **551** | **999** | 551 | 1000 | 559 | 985 |
| 470.lbm | 56 | **928** | **829** | 928 | 829 | 928 | 829 | 56 | **928** | **829** | 928 | 829 | 928 | 829 |
| 481.wrf | 56 | 860 | 728 | **858** | **729** | 857 | 730 | 56 | **851** | **735** | 851 | 735 | 851 | 735 |
| 482.sphinx3 | 56 | **1403** | **778** | 1405 | 777 | 1397 | 781 | 56 | **1380** | **791** | 1377 | 793 | 1386 | 788 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS configuration:
Cluster On Die set to Enabled
Early Snoop set to Disabled
```

Continued on next page

## Platform Notes (Continued)

```
Performance Profile set to Custom
C1E Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
Thermal Profile set to High Fan Speed
Memory Power Savings set to Disabled
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on RD650 Thu Oct 23 10:07:39 2014

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
       2 "physical id"s (chips)
       56 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 14
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 17920 KB

 From /proc/meminfo
    MemTotal:       264410416 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.5 (Santiago)

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux RD650 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Oct 22 22:57

 SPEC is set to: /usr/cpu2006
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      ext4  217G   63G  143G  31% /

 Additional information from dmidecode:
   BIOS LENOVO PB2TS110 10/06/2014
```

Continued on next page

## Platform Notes (Continued)

```
    Memory:
     16x   16 GB
     16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2133 MHz 2 rank
     8x NO DIMM NO DIMM

  (End of data from sysinfo program)
RD650 support 4 channels and 12 DIMMs per processor, total 8 channels and
24 DIMMs. 16 DIMM slots installed with 16 GB DIMM for this run.
```

## General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

## Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
   435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
   437.leslie3d: -DSPEC_CPU_LP64
```

Continued on next page

## Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Continued on next page

# Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD650-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD650-revB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:32:34 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.