SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp®_rate2006 = 568

SPECfp_rate_base2006 = 554

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2015
Hardware Availability: Sep-2014
Software Availability: Jan-2014

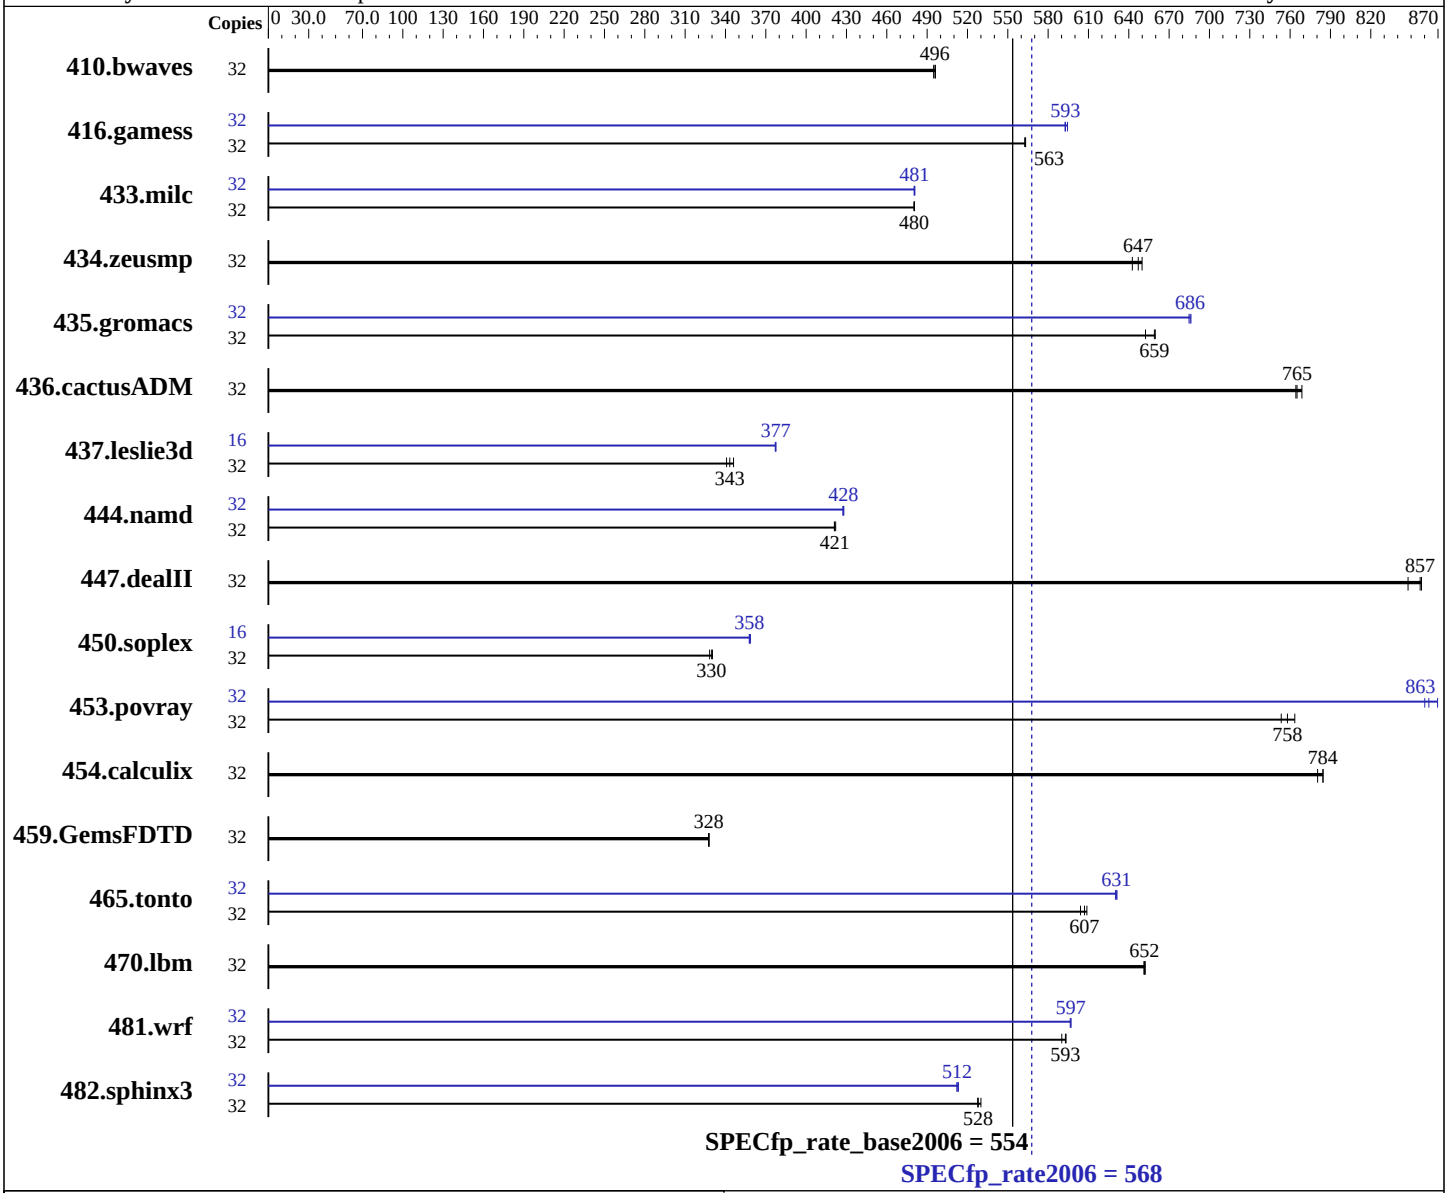

Hardware

CPU Name:	Intel Xeon E5-2630 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp_rate2006 = 568

SPECfp_rate_base2006 = 554

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2015
Hardware Availability: Sep-2014
Software Availability: Jan-2014

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 240 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	876	496	**877**	**496**	879	495	32	876	496	**877**	**496**	879	495
416.gamess	32	1112	563	1114	563	**1113**	**563**	32	**1057**	**593**	1054	594	1057	593
433.milc	32	612	480	**611**	**480**	611	481	32	611	481	**611**	**481**	612	480
434.zeusmp	32	**450**	**647**	448	650	453	643	32	**450**	**647**	448	650	453	643
435.gromacs	32	346	660	**347**	**659**	350	652	32	333	686	**333**	**686**	334	685
436.cactusADM	32	497	769	500	764	**500**	**765**	32	497	769	500	764	**500**	**765**
437.leslie3d	32	**876**	**343**	883	341	869	346	16	398	377	399	377	**398**	**377**
444.namd	32	**609**	**421**	608	422	610	421	32	**600**	**428**	601	427	600	428
447.dealII	32	**427**	**857**	432	848	427	858	32	**427**	**857**	432	848	427	858
450.soplex	32	**809**	**330**	813	328	808	330	16	372	359	**373**	**358**	373	358
453.povray	32	**225**	**758**	223	763	226	753	32	198	860	**197**	**863**	196	870
454.calculix	32	338	780	**337**	**784**	337	784	32	338	780	**337**	**784**	337	784
459.GemsFDTD	32	1037	327	**1036**	**328**	1036	328	32	1037	327	**1036**	**328**	1036	328
465.tonto	32	521	604	**519**	**607**	517	609	32	**499**	**631**	499	631	500	630
470.lbm	32	675	651	674	652	**675**	**652**	32	675	651	674	652	**675**	**652**
481.wrf	32	**603**	**593**	606	590	602	593	32	599	597	599	596	**599**	**597**
482.sphinx3	32	1177	530	**1181**	**528**	1182	528	32	1218	512	1215	513	**1217**	**512**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Cluster On Die set to Auto
Early Snoop set to Auto
```

Continued on next page

Platform Notes (Continued)

```
Performance Profile set to Custom
C1E Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
Thermal Profile set to High Fan Speed
Memory Power Savings set to Disabled
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on RD550 Mon Jan  5 23:05:14 2015

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2630 v3 @ 2.40GHz
       2 "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 1 2 3 4 5 6 7
       physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 KB

 From /proc/meminfo
    MemTotal:       264413604 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.5 (Santiago)

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux RD550 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Jan 5 23:03

 SPEC is set to: /usr/cpu2006
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      ext4  217G   68G  138G  33% /

 Additional information from dmidecode:
   BIOS LENOVO PB2TS110 10/06/2014
```

Continued on next page

Platform Notes (Continued)

```
    Memory:
     16x   16 GB
     16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 1866 MHz 2 rank
     8x NO DIMM NO DIMM

  (End of data from sysinfo program)
RD650 support 4 channels and 12 DIMMs per processor, total 8 channels and
24 DIMMs. 16 DIMM slots installed with 16 GB DIMM for this run.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
   435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
   437.leslie3d: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-HSW-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-HSW-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 10 18:33:53 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 February 2015.