



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2015

Hardware Availability: Jun-2015

Software Availability: Mar-2015

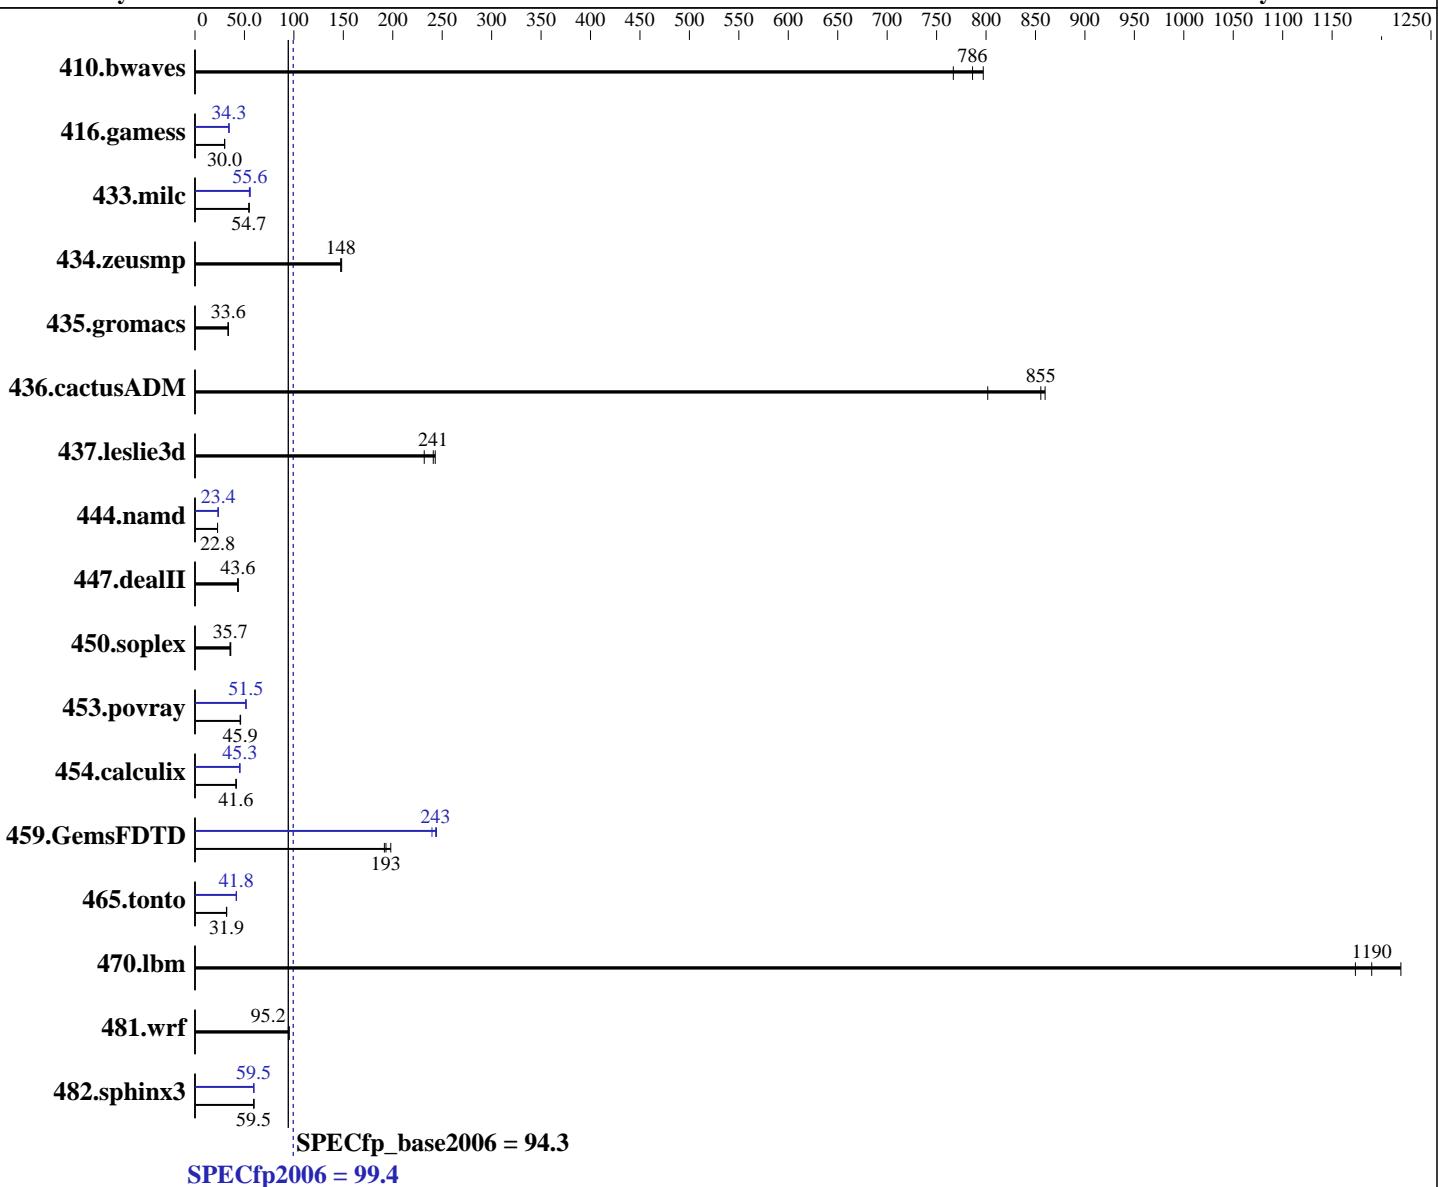

## Hardware

CPU Name: Intel Xeon E7-4830 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 Compiler: 3.10.0-229.el7.x86\_64  
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Mar-2015

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
 Disk Subsystem: 1 x 200 GB SAS6 SSD  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	17.7	767	17.0	797	<u>17.3</u>	<u>786</u>	17.7	767	17.0	797	<u>17.3</u>	<u>786</u>
416.gamess	<b>653</b>	<b>30.0</b>	655	29.9	653	30.0	<b>571</b>	<b>34.3</b>	570	34.4	571	34.3
433.milc	168	54.7	168	54.5	<b>168</b>	<b>54.7</b>	<b>165</b>	<b>55.6</b>	165	55.7	167	55.0
434.zeusmp	<b>61.7</b>	<b>148</b>	61.7	148	61.4	148	<b>61.7</b>	<b>148</b>	61.7	148	61.4	148
435.gromacs	213	33.5	<b>212</b>	<b>33.6</b>	212	33.6	<b>213</b>	33.5	<b>212</b>	<b>33.6</b>	212	33.6
436.cactusADM	13.9	860	14.9	802	<b>14.0</b>	<b>855</b>	13.9	860	14.9	802	<b>14.0</b>	<b>855</b>
437.leslie3d	38.7	243	<b>39.0</b>	<b>241</b>	40.5	232	<b>38.7</b>	243	<b>39.0</b>	<b>241</b>	40.5	232
444.namd	352	22.8	<b>352</b>	<b>22.8</b>	352	22.8	<b>343</b>	23.4	342	23.4	<b>342</b>	<b>23.4</b>
447.dealII	<b>262</b>	<b>43.6</b>	265	43.1	262	43.7	<b>262</b>	<b>43.6</b>	265	43.1	262	43.7
450.soplex	<b>234</b>	<b>35.7</b>	235	35.5	230	36.2	<b>234</b>	<b>35.7</b>	235	35.5	230	36.2
453.povray	116	45.7	115	46.1	<b>116</b>	<b>45.9</b>	103	51.6	<b>103</b>	<b>51.5</b>	103	51.5
454.calculix	<b>198</b>	<b>41.6</b>	198	41.6	199	41.5	<b>182</b>	<b>45.3</b>	182	45.4	183	45.2
459.GemsFDTD	55.4	192	53.6	198	<b>54.9</b>	<b>193</b>	43.4	244	<b>43.6</b>	<b>243</b>	44.3	240
465.tonto	<b>309</b>	<b>31.9</b>	310	31.8	306	32.1	<b>236</b>	41.8	<b>236</b>	<b>41.8</b>	234	42.0
470.lbm	11.7	1170	<b>11.5</b>	<b>1190</b>	11.3	1220	<b>11.7</b>	1170	<b>11.5</b>	<b>1190</b>	11.3	1220
481.wrf	117	95.2	118	94.4	<b>117</b>	<b>95.2</b>	117	95.2	118	94.4	<b>117</b>	<b>95.2</b>
482.sphinx3	<b>328</b>	<b>59.5</b>	327	59.6	328	59.4	<b>328</b>	<b>59.5</b>	328	59.3	328	59.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
 Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost enabled  
 Energy Efficient Turbo disabled  
 C1E disabled  
 C States disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Mar-2015

## Platform Notes (Continued)

Collaborative CPU Performance Control disabled

Memory Patrol Scrub disabled

Memory Refresh Rate set to 1x

Uncore Frequency set to Maximum

Energy Efficient Policy set to Performance

Monitor/MWait enabled

Sysinfo program

```
/root/Desktop/Performance/ic15.0_Aug29_2014/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 #$
e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed Apr 8 10:00:29 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4830 v3 @ 2.10GHz
        4 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      528089244 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Mar-2015

## Platform Notes (Continued)

EST 2015 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Apr 8 10:00 last=5

SPEC is set to: /root/Desktop/Performance/ic15.0\_Aug29\_2014  
Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 ext4 183G 10G 164G 6% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.1 [MRC\_096] 03/27/2015

Memory:

32x 00AD00B300AD Not Specified 16 GB 2 rank 2133 MHz, configured at 1333 MHz  
64x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/Desktop/Performance/ic15.0\_Aug29\_2014/lib32:/root/Desktop/Performance/ic15.0\_Aug29\_2014/lib64:/root/Desktop/Performance/ic15.0\_Aug29\_2014/sh"

OMP\_NUM\_THREADS = "48"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Mar-2015

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Mar-2015

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 99.4**

PowerEdge R930 (Intel Xeon E7-4830 v3, 2.10 GHz)

**SPECfp\_base2006 = 94.3**

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Mar-2015

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 5 15:15:05 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 May 2015.