SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4820 v3, 1.90 GHz

SPECfp®_rate2006 = 516

SPECfp_rate_base2006 = 504

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Mar-2015

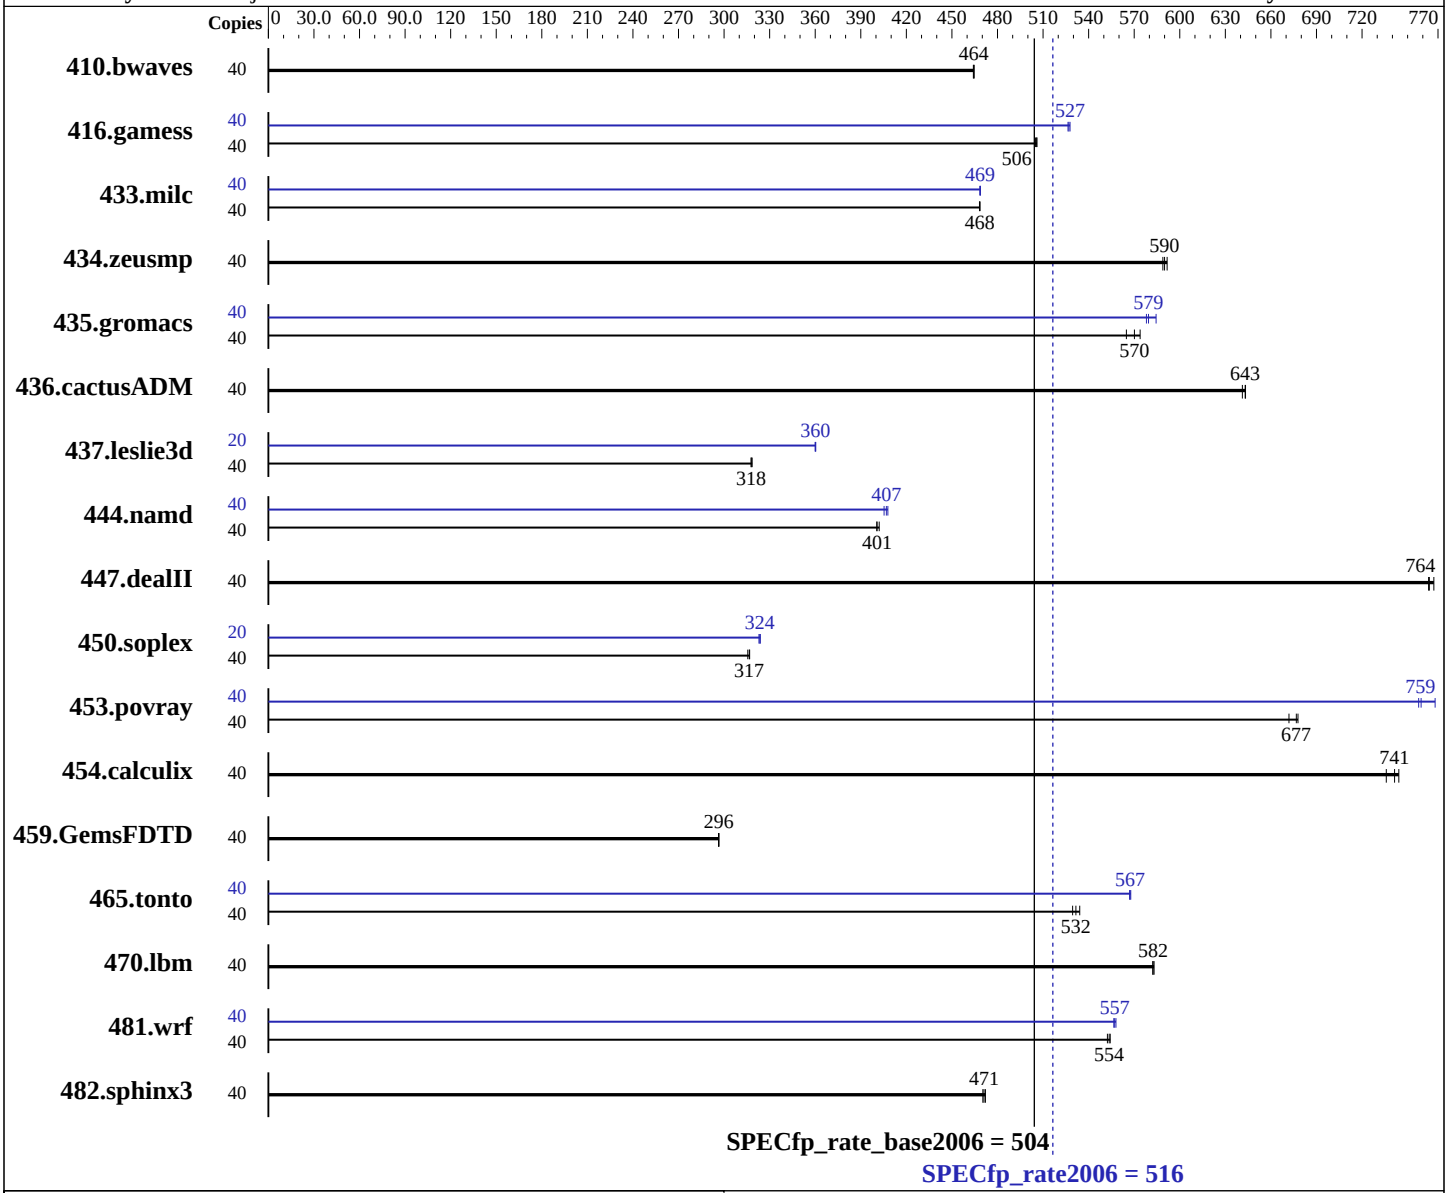

Hardware

CPU Name:	Intel Xeon E7-4820 v3
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M2, Intel Xeon E7-4820 v3, 1.90 GHz

SPECfp_rate2006 = 516

SPECfp_rate_base2006 = 504

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Mar-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem: 1 x SATA, 600 GB, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1171	464	**1170**	**464**	1170	465	40	1171	464	**1170**	**464**	1170	465
416.gamess	40	**1549**	**506**	1551	505	1548	506	40	1488	526	1484	528	**1486**	**527**
433.milc	40	**784**	**468**	784	468	784	468	40	**784**	**469**	783	469	784	468
434.zeusmp	40	618	589	615	592	**617**	**590**	40	618	589	615	592	**617**	**590**
435.gromacs	40	498	574	**501**	**570**	506	565	40	489	584	494	578	**493**	**579**
436.cactusADM	40	**743**	**643**	743	643	745	641	40	**743**	**643**	743	643	745	641
437.leslie3d	40	1181	318	**1183**	**318**	1183	318	20	522	360	**522**	**360**	522	360
444.namd	40	801	401	**801**	**401**	798	402	40	791	405	**789**	**407**	787	408
447.dealII	40	599	764	596	767	**599**	**764**	40	599	764	596	767	**599**	**764**
450.soplex	40	1053	317	1057	316	**1054**	**317**	20	516	323	**516**	**324**	515	324
453.povray	40	314	678	317	672	**314**	**677**	40	**280**	**759**	277	768	281	757
454.calculix	40	448	736	443	744	**445**	**741**	40	448	736	443	744	**445**	**741**
459.GemsFDTD	40	**1432**	**296**	1432	296	1431	297	40	**1432**	**296**	1432	296	1431	297
465.tonto	40	743	529	737	534	**740**	**532**	40	694	567	**694**	**567**	693	568
470.lbm	40	943	583	**944**	**582**	944	582	40	943	583	**944**	**582**	944	582
481.wrf	40	809	552	**807**	**554**	806	554	40	803	557	**802**	**557**	801	558
482.sphinx3	40	**1655**	**471**	1651	472	1657	470	40	**1655**	**471**	1651	472	1657	470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Energy Performance = Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
     454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:45:22 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.