



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 485

Express5800/B120f (Intel Xeon E5-2690 v3)

SPECint_rate_base2006 = 460

CPU2006 license: 9006


Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Apr-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

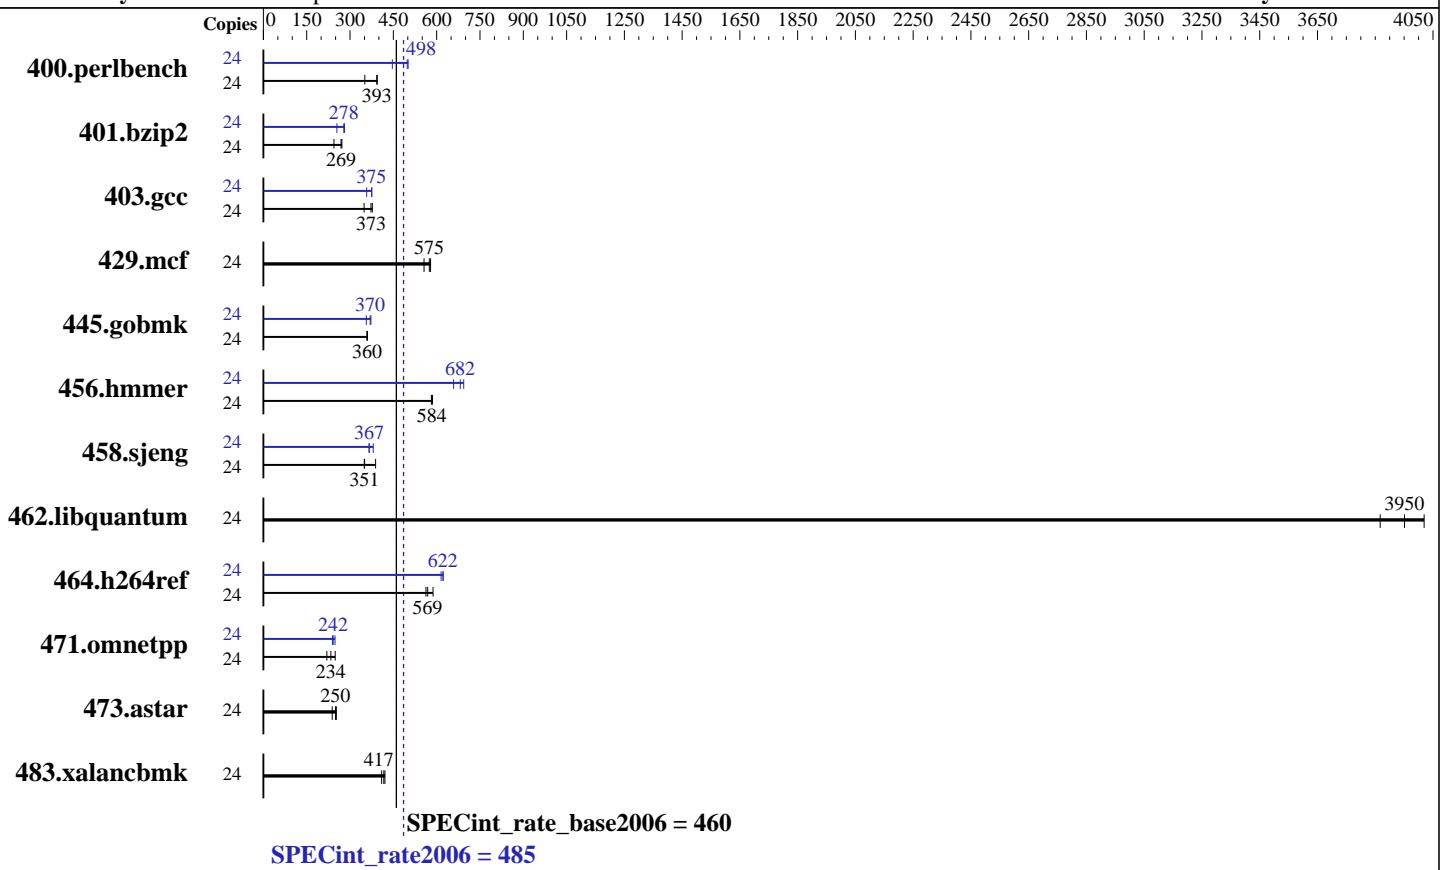

Hardware

CPU Name:	Intel Xeon E5-2690 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	12 cores, 1 chip, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (3 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 300 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler:	Kernel 2.6.32-431.20.3.el6.x86_64
Auto Parallel:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
File System:	No
System State:	ext4
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 485

Express5800/B120f (Intel Xeon E5-2690 v3)

SPECint_rate_base2006 = 460

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Apr-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	595	394	597	393	668	351	24	471	498	468	501	525	447
401.bzip2	24	862	269	852	272	948	244	24	825	281	832	278	910	255
403.gcc	24	554	349	512	377	518	373	24	540	358	515	375	515	375
429.mcf	24	393	556	381	575	378	579	24	393	556	381	575	378	579
445.gobmk	24	699	360	700	360	702	359	24	681	370	676	372	706	356
456.hammer	24	384	584	385	582	382	585	24	328	682	340	659	323	694
458.sjeng	24	747	389	828	351	831	349	24	794	366	792	367	763	380
462.libquantum	24	129	3870	126	3950	124	4020	24	129	3870	126	3950	124	4020
464.h264ref	24	934	569	904	587	944	563	24	853	623	854	622	863	615
471.omnetpp	24	683	220	642	234	603	249	24	627	239	620	242	605	248
473.astar	24	667	253	674	250	707	238	24	667	253	674	250	707	238
483.xalancbmk	24	404	409	393	421	397	417	24	404	409	393	421	397	417

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Processor C6 Report: Enabled

Energy Performance: Performance

Patrol Scrub: Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f (Intel Xeon E5-2690 v3)

SPECint_rate2006 = 485

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2014

Hardware Availability: Apr-2015

Software Availability: Jul-2014

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f (Intel Xeon E5-2690 v3)

SPECint_rate2006 = 485

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2014

Hardware Availability: Apr-2015

Software Availability: Jul-2014

Peak Compiler Invocation (Continued)

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
456.hmmmer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes  
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias
```

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f (Intel Xeon E5-2690 v3)

SPECint_rate2006 = 485

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Apr-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

Peak Optimization Flags (Continued)

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:46:37 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.