



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®\_rate2006 = 298**

Express5800/R120f-1E (Intel Xeon E5-2630 v3)

**SPECfp\_rate\_base2006 = 289**

**CPU2006 license:** 9006


**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2015

**Hardware Availability:** Jan-2015

**Software Availability:** Jul-2014

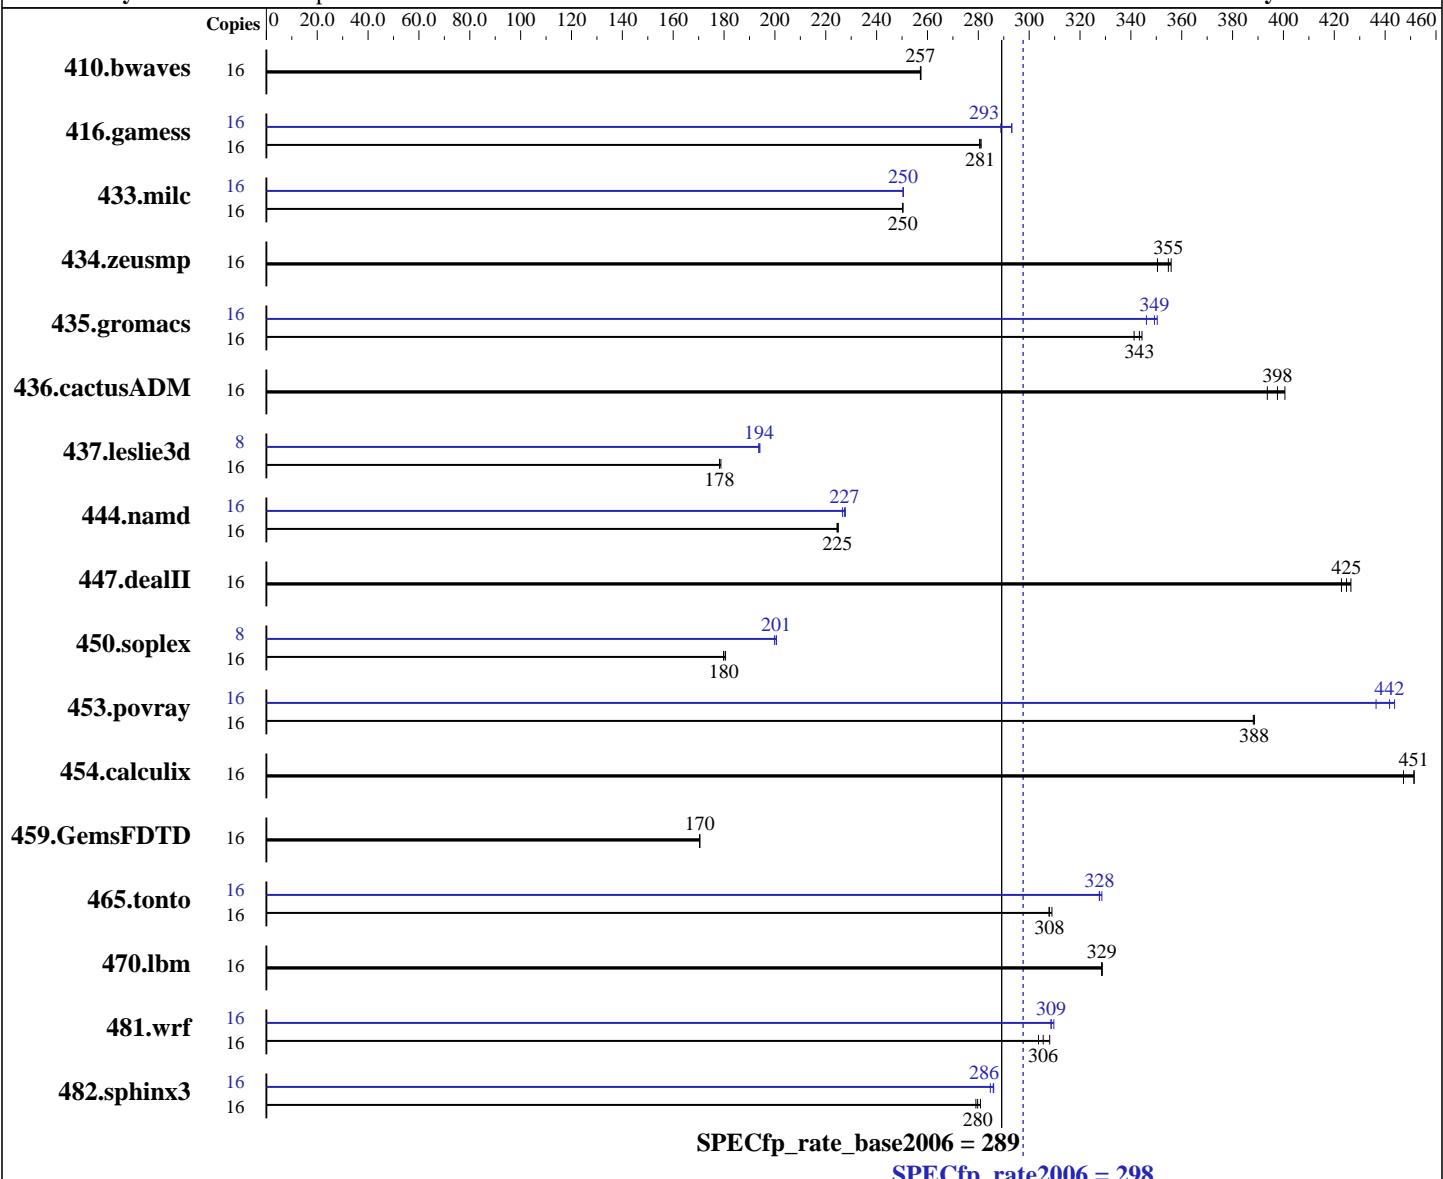

## Hardware

CPU Name: Intel Xeon E5-2630 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: Kernel 2.6.32-431.20.3.el6.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120f-1E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 298**

**SPECfp\_rate\_base2006 = 289**

**CPU2006 license:** 9006

**Test date:** May-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>845</b>	<b>257</b>	845	257	845	257	16	<b>845</b>	<b>257</b>	845	257	845	257
416.gamess	16	<b>1116</b>	<b>281</b>	1117	280	1114	281	16	<b>1069</b>	<b>293</b>	1085	289	1068	293
433.milc	16	<b>587</b>	<b>250</b>	587	250	587	250	16	<b>587</b>	<b>250</b>	586	251	<b>586</b>	<b>250</b>
434.zeusmp	16	<b>410</b>	<b>355</b>	409	356	415	350	16	<b>410</b>	<b>355</b>	409	356	415	350
435.gromacs	16	332	344	335	341	<b>333</b>	<b>343</b>	16	<b>327</b>	<b>349</b>	330	346	326	350
436.cactusADM	16	486	394	<b>481</b>	<b>398</b>	477	401	16	486	394	<b>481</b>	<b>398</b>	477	401
437.leslie3d	16	844	178	<b>844</b>	<b>178</b>	841	179	8	<b>388</b>	<b>194</b>	388	194	387	194
444.namd	16	<b>571</b>	<b>225</b>	570	225	572	224	16	566	227	563	228	<b>564</b>	<b>227</b>
447.dealII	16	433	423	429	427	<b>431</b>	<b>425</b>	16	433	423	429	427	<b>431</b>	<b>425</b>
450.soplex	16	739	181	742	180	<b>742</b>	<b>180</b>	8	333	201	<b>333</b>	<b>201</b>	334	200
453.povray	16	219	388	219	389	<b>219</b>	<b>388</b>	16	<b>193</b>	<b>442</b>	195	436	192	444
454.calculix	16	292	451	295	447	<b>292</b>	<b>451</b>	16	292	451	295	447	<b>292</b>	<b>451</b>
459.GemsFDTD	16	997	170	<b>996</b>	<b>170</b>	996	170	16	997	170	<b>996</b>	<b>170</b>	996	170
465.tonto	16	510	309	511	308	<b>511</b>	<b>308</b>	16	479	329	<b>480</b>	<b>328</b>	481	328
470.lbm	16	669	329	<b>669</b>	<b>329</b>	669	329	16	669	329	<b>669</b>	<b>329</b>	669	329
481.wrf	16	580	308	589	304	<b>585</b>	<b>306</b>	16	<b>579</b>	<b>309</b>	577	310	579	309
482.sphinx3	16	<b>1115</b>	<b>280</b>	1110	281	1118	279	16	1095	285	<b>1091</b>	<b>286</b>	1090	286

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120f-1E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 298**

**SPECfp\_rate\_base2006 = 289**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2015

**Hardware Availability:** Jan-2015

**Software Availability:** Jul-2014

## Platform Notes (Continued)

Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
    434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
    447.dealII: -DSPEC\_CPU\_LP64  
    450.soplex: -DSPEC\_CPU\_LP64  
    453.povray: -DSPEC\_CPU\_LP64  
    454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
    481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 298**

**SPECfp\_rate\_base2006 = 289**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2015

**Hardware Availability:** Jan-2015

**Software Availability:** Jul-2014

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 298**

**SPECfp\_rate\_base2006 = 289**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2015

**Hardware Availability:** Jan-2015

**Software Availability:** Jul-2014

## Peak Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
          -O3(pass 2) -no-prec-div(pass 2)  
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
          -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
             -unroll2
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
          -O3(pass 2) -no-prec-div(pass 2)  
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
          -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
             -O3(pass 2) -no-prec-div(pass 2)  
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
             -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
             -O3(pass 2) -no-prec-div(pass 2)  
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
             -ansi-alias
```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120f-1E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 298**

**SPECfp\_rate\_base2006 = 289**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2015

**Hardware Availability:** Jan-2015

**Software Availability:** Jul-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:47:10 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.