



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 X5 (Intel Xeon E5-2670 v2, 2.50 GHz)

SPECint_rate2006 = 805

SPECint_rate_base2006 = 779

CPU2006 license: 9008


Test date: May-2015

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Oct-2014

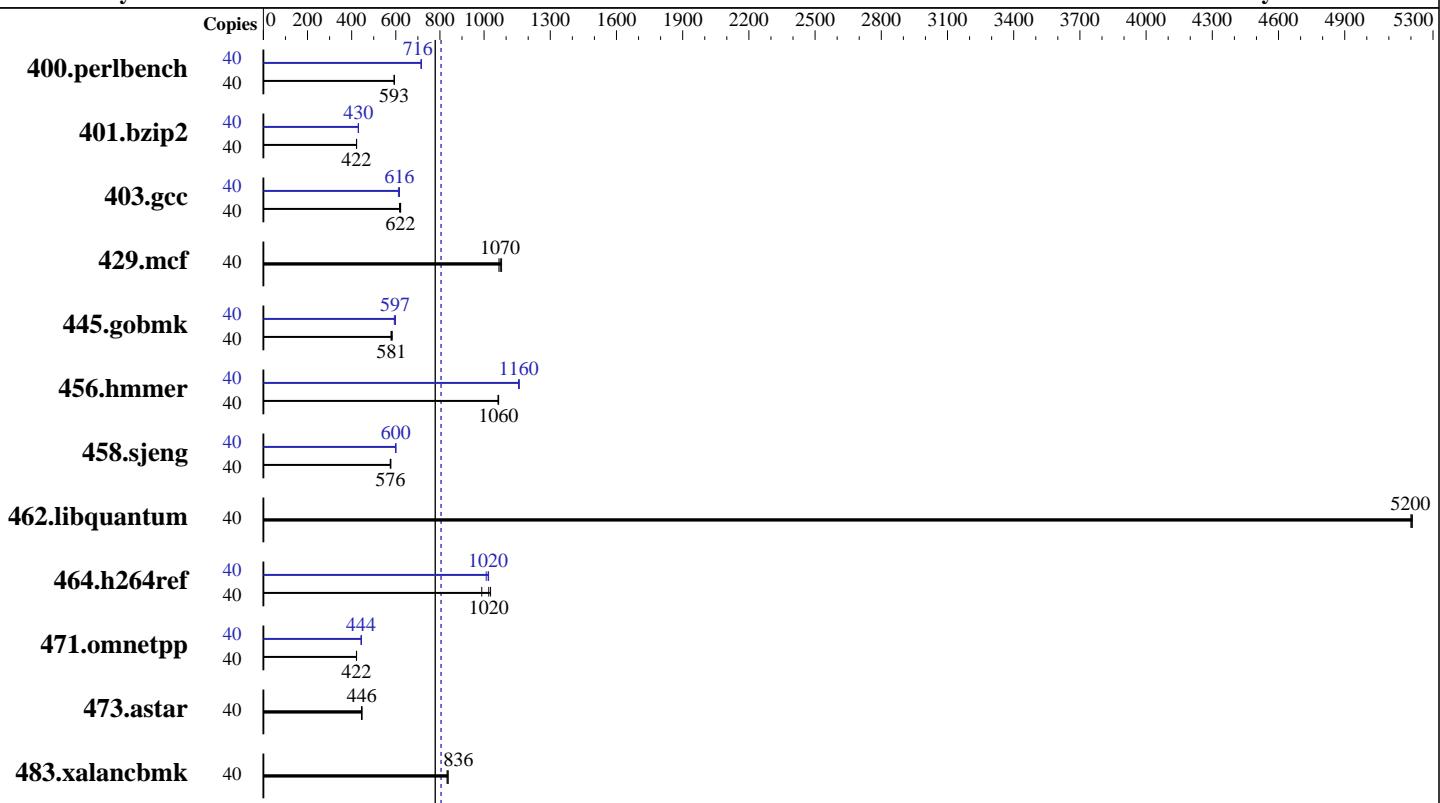

SPECint_rate_base2006 = 779

SPECint_rate2006 = 805

Hardware

CPU Name: Intel Xeon E5-2670 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 Compiler: 2.6.32-431.el6.x86_64
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	805
ACTINA SOLAR 820 X5 (Intel Xeon E5-2670 v2, 2.50 GHz)	SPECint_rate_base2006 =	779

CPU2006 license: 9008

Test date: May-2015

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	659	593	659	593	659	593	40	546	716	546	716	547	714
401.bzip2	40	915	422	914	422	914	422	40	897	430	896	431	897	430
403.gcc	40	522	617	518	622	518	622	40	522	617	522	616	526	612
429.mcf	40	342	1070	338	1080	340	1070	40	342	1070	338	1080	340	1070
445.gobmk	40	719	584	725	578	723	581	40	701	599	707	593	703	597
456.hmmer	40	350	1060	351	1060	350	1070	40	322	1160	323	1160	322	1160
458.sjeng	40	841	575	841	576	838	578	40	809	599	807	600	806	601
462.libquantum	40	159	5210	159	5200	159	5200	40	159	5210	159	5200	159	5200
464.h264ref	40	867	1020	895	990	860	1030	40	867	1020	877	1010	869	1020
471.omnetpp	40	592	422	593	422	592	422	40	563	444	564	444	564	443
473.astar	40	629	446	629	447	632	445	40	629	446	629	447	632	445
483.xalancbmk	40	330	837	332	832	330	836	40	330	837	332	832	330	836

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings

System Acoustic and Performance Configuration = Performance

Select Memory RAS Configuration = Maximum Performance

Intel(R) Turbo Boost Technology = Enabled

Processor C3 = Disabled

Processor C6 = Disabled

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on SUT Thu May 14 16:03:05 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	805
ACTINA SOLAR 820 X5 (Intel Xeon E5-2670 v2, 2.50 GHz)	SPECint_rate_base2006 =	779
CPU2006 license: 9008	Test date:	May-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Oct-2013
Tested by: ACTION S.A.	Software Availability:	Oct-2014

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
  2 "physical id"s (chips)
    40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings   : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

From /proc/meminfo
MemTotal:      264426684 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.6 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux SUT 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
  x86_64 x86_64 GNU/Linux

run-level 3 May 14 16:01

SPEC is set to: /cpu2006.1.2
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sdal      ext4  212G   52G  150G  26% /

Additional information from dmidecode:
  BIOS Intel Corp. SE5C600.86B.02.04.0003.102320141138 10/23/2014
  Memory:
    16x 16 GB
    16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)
```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	805
ACTINA SOLAR 820 X5 (Intel Xeon E5-2670 v2, 2.50 GHz)	SPECint_rate_base2006 =	779
CPU2006 license: 9008	Test date:	May-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Oct-2013
Tested by: ACTION S.A.	Software Availability:	Oct-2014

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Binaries compiled on a system with 2x Xeon E5-2650 v2 chips + 256 GB memory
using RedHat EL 6.4
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	805
ACTINA SOLAR 820 X5 (Intel Xeon E5-2670 v2, 2.50 GHz)	SPECint_rate_base2006 =	779
CPU2006 license: 9008	Test date:	May-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Oct-2013
Tested by: ACTION S.A.	Software Availability:	Oct-2014

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll14 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	805
ACTINA SOLAR 820 X5 (Intel Xeon E5-2670 v2, 2.50 GHz)	SPECint_rate_base2006 =	779
CPU2006 license: 9008	Test date:	May-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Oct-2013
Tested by: ACTION S.A.	Software Availability:	Oct-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/cpu2006.1.2/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:47:25 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.