



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**  
**SPECfp\_rate\_base2006 = 1610**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

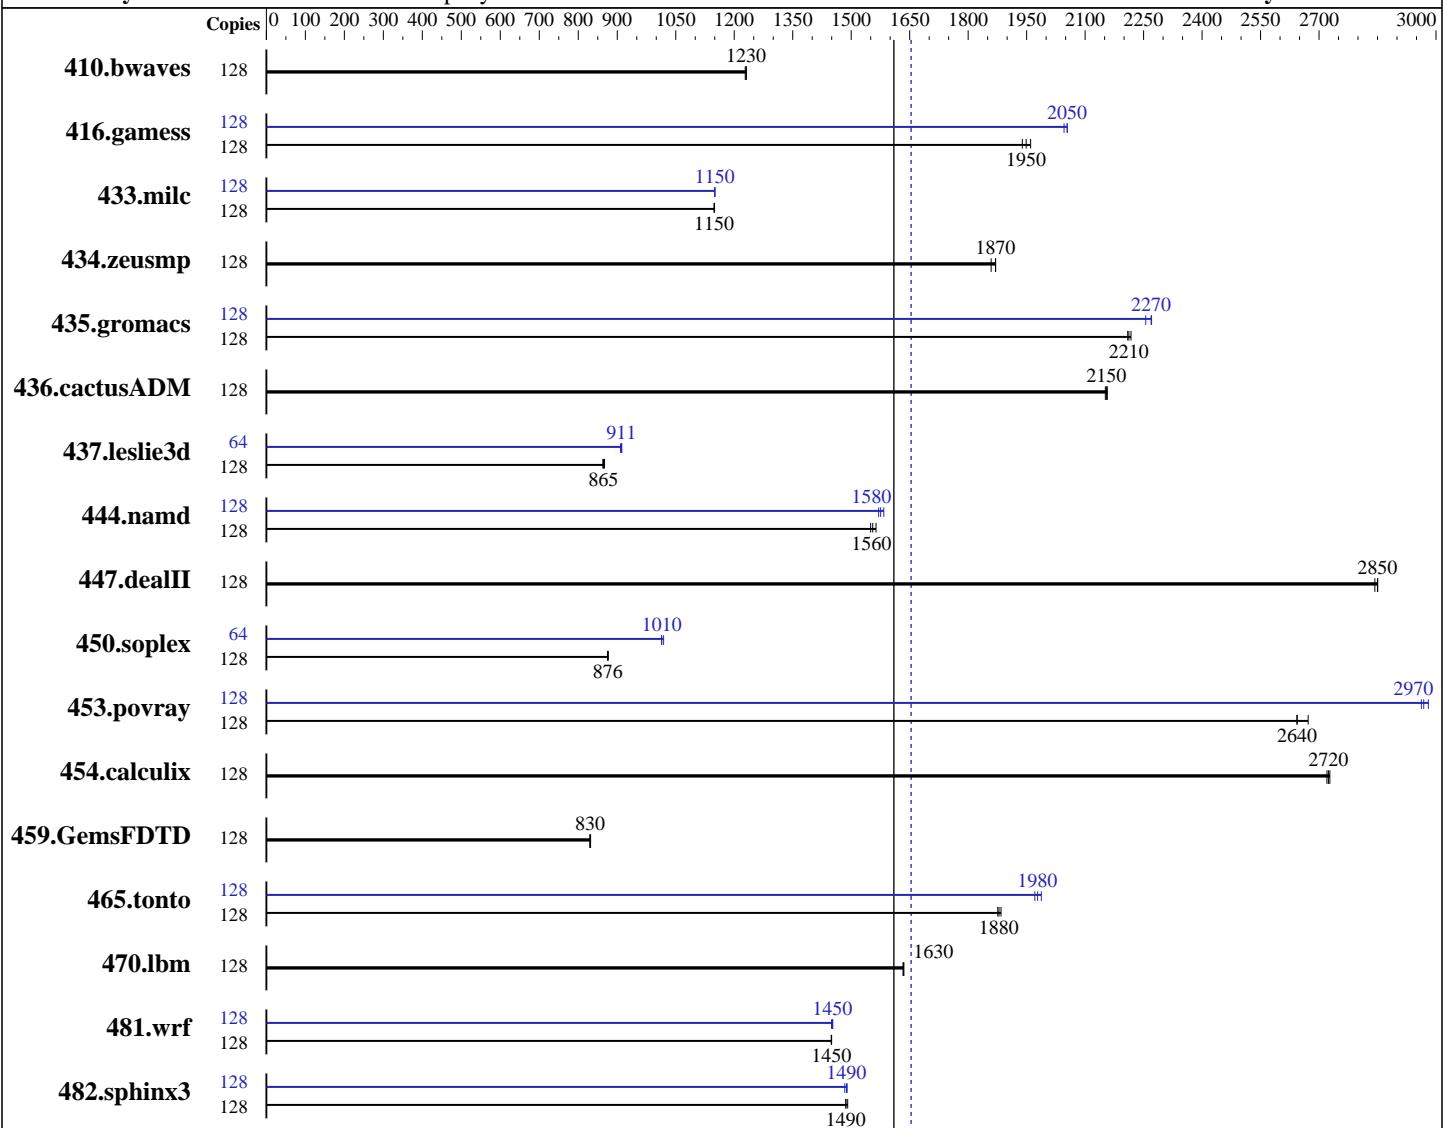

**SPECfp\_rate\_base2006 = 1610**

**SPECfp\_rate2006 = 1650**

### Hardware

CPU Name: Intel Xeon E5-4667 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64)  
Compiler: Kernel 3.12.28-4-default  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1413	1230	1416	1230	<b>1413</b>	<b>1230</b>	128	1413	1230	1416	1230	<b>1413</b>	<b>1230</b>
416.gamess	128	1279	1960	1293	1940	<b>1286</b>	<b>1950</b>	128	1225	2050	1220	2050	<b>1220</b>	<b>2050</b>
433.milc	128	<b>1023</b>	<b>1150</b>	1022	1150	1023	1150	128	<b>1022</b>	<b>1150</b>	1021	1150	1022	1150
434.zeusmp	128	623	1870	627	1860	<b>623</b>	<b>1870</b>	128	623	1870	627	1860	<b>623</b>	<b>1870</b>
435.gromacs	128	414	2210	412	2220	<b>413</b>	<b>2210</b>	128	405	2260	403	2270	<b>403</b>	<b>2270</b>
436.cactusADM	128	711	2150	709	2160	<b>710</b>	<b>2150</b>	128	711	2150	709	2160	<b>710</b>	<b>2150</b>
437.leslie3d	128	1394	863	<b>1392</b>	<b>865</b>	1387	867	64	662	908	660	911	<b>660</b>	<b>911</b>
444.namd	128	656	1560	662	1550	<b>660</b>	<b>1560</b>	128	648	1580	654	1570	<b>652</b>	<b>1580</b>
447.dealII	128	514	2850	<b>514</b>	<b>2850</b>	515	2840	128	514	2850	<b>514</b>	<b>2850</b>	515	2840
450.soplex	128	1220	875	1217	877	<b>1219</b>	<b>876</b>	64	524	1020	<b>526</b>	<b>1010</b>	527	1010
453.povray	128	255	2670	<b>258</b>	<b>2640</b>	258	2640	128	<b>229</b>	<b>2970</b>	230	2960	228	2980
454.calculix	128	<b>388</b>	<b>2720</b>	388	2720	387	2730	128	<b>388</b>	<b>2720</b>	388	2720	387	2730
459.GemsFDTD	128	1633	832	<b>1635</b>	<b>830</b>	1637	830	128	1633	832	<b>1635</b>	<b>830</b>	1637	830
465.tonto	128	<b>670</b>	<b>1880</b>	668	1880	671	1880	128	639	1970	<b>637</b>	<b>1980</b>	634	1990
470.lbm	128	1076	1630	<b>1076</b>	<b>1630</b>	1077	1630	128	<b>1076</b>	<b>1630</b>	<b>1076</b>	<b>1630</b>	1077	1630
481.wrf	128	986	1450	<b>987</b>	<b>1450</b>	987	1450	128	984	1450	<b>985</b>	<b>1450</b>	986	1450
482.sphinx3	128	1673	1490	<b>1678</b>	<b>1490</b>	1679	1490	128	<b>1677</b>	<b>1490</b>	1682	1480	1675	1490

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

## Platform Notes

### BIOS Configuration

Power Profile set to Custom  
Power Regulator set to Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
Energy/Performance Bias set to Maximum Performance  
Collaborative Power Control set to Enabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on dl560gen9jks Sat May 16 02:28:58 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4667 v3 @ 2.00GHz  
 4 "physical id"s (chips)  
 128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 16  
 siblings : 32  
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
 physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
 physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
cache size : 40960 KB

From /proc/meminfo  
MemTotal: 529302784 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
 SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 0  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
NAME="SLES"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

## Platform Notes (Continued)

```
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux dl560gen9jks 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 15 12:29 last=5
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   331G   6.0G  325G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P85 03/05/2015

Memory:
24x HP 752369-081 16 GB 2 rank 2133 MHz
16x UNKNOWN NOT AVAILABLE
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

24x HP 752369-081 16 GB 2 rank 2133 MHz
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

fort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.games: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** May-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
          -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
              -unroll2

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** May-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
           -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
           -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
           -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-prefetch -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4667 v3)

**SPECfp\_rate2006 = 1650**

**SPECfp\_rate\_base2006 = 1610**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:49:08 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.