



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp®2006 = 109

SPECfp_base2006 = 103

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Mar-2015

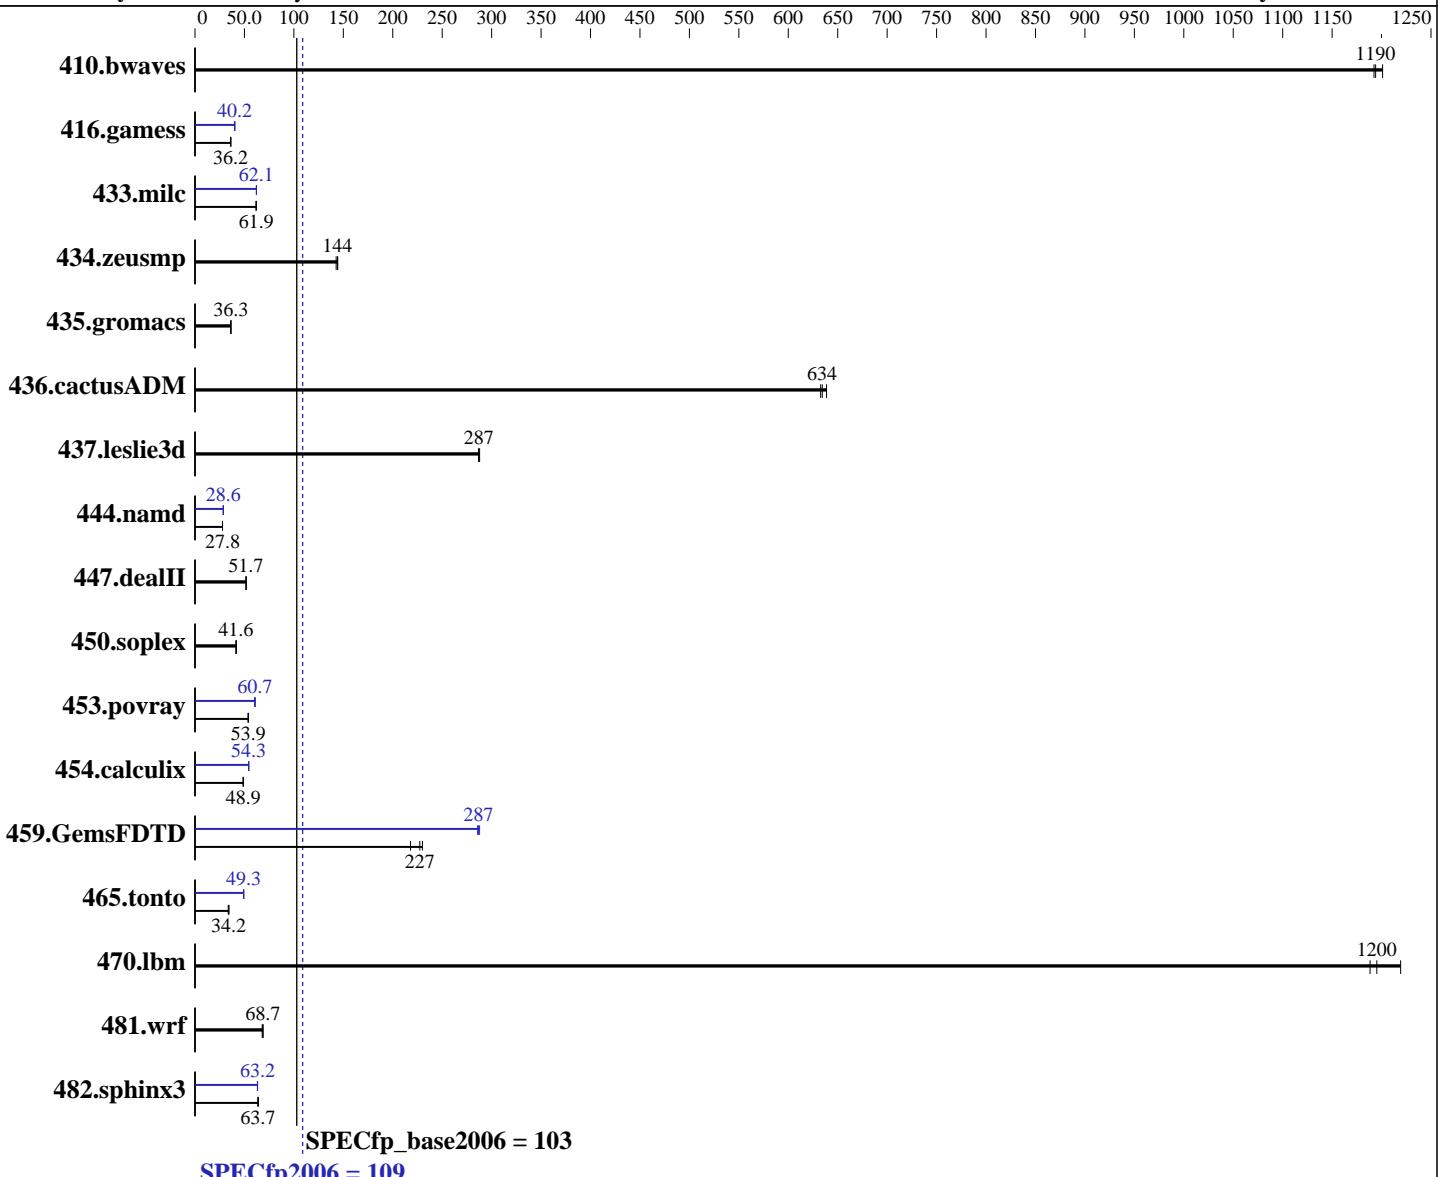

Hardware

CPU Name: Intel Xeon E7-8890 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip
CPU(s) orderable: 2,4 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
Compiler: 3.10.0-229.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp2006 = 109

SPECfp_base2006 = 103

CPU2006 license: 9019

Test date: Jun-2015

Test sponsor: Cisco Systems

Hardware Availability: May-2015

Tested by: Cisco Systems

Software Availability: Mar-2015

L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R,
 running at 1600 MHz)
 Disk Subsystem: 1 x 600 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	11.3	1200	11.4	1190	11.4	1190	11.3	1200	11.4	1190	11.4	1190
416.gamess	541	36.2	542	36.2	543	36.1	487	40.2	488	40.2	487	40.2
433.milc	148	61.8	148	61.9	148	62.0	148	62.2	148	62.1	148	62.0
434.zeusmp	63.7	143	63.1	144	63.1	144	63.7	143	63.1	144	63.1	144
435.gromacs	197	36.3	197	36.3	197	36.2	197	36.3	197	36.3	197	36.2
436.cactusADM	18.7	639	18.8	634	18.9	633	18.7	639	18.8	634	18.9	633
437.leslie3d	32.8	287	32.7	288	32.8	287	32.8	287	32.7	288	32.8	287
444.namd	288	27.8	288	27.8	288	27.8	280	28.6	280	28.6	281	28.6
447.dealII	221	51.7	222	51.6	221	51.7	221	51.7	222	51.6	221	51.7
450.soplex	201	41.6	200	41.7	201	41.6	201	41.6	200	41.7	201	41.6
453.povray	99.2	53.6	98.4	54.0	98.6	53.9	88.3	60.3	87.6	60.7	87.4	60.9
454.calculix	169	48.9	169	48.9	169	48.7	152	54.4	152	54.3	152	54.3
459.GemsFDTD	46.1	230	46.7	227	48.7	218	36.9	288	37.1	286	37.0	287
465.tonto	293	33.6	288	34.2	287	34.3	200	49.3	200	49.3	200	49.1
470.lbm	11.5	1200	11.6	1190	11.3	1220	11.5	1200	11.6	1190	11.3	1220
481.wrf	162	68.8	163	68.7	164	68.0	162	68.8	163	68.7	164	68.0
482.sphinx3	304	64.1	306	63.7	306	63.6	308	63.3	309	63.1	308	63.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Intel Hyper-Threading Technology set to Disabled
 CPU performance set to Enterprise

Power Technology set to Energy-Efficient

Energy Performance BIAS setting set to Balanced Performance

Memory RAS configuration set to Maximum Performance

Memory Power Saving Mode set to Disabled

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Wed Jun 10 01:50:50 2015

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp2006 =

109

SPECfp_base2006 =

103

CPU2006 license: 9019

Test date: Jun-2015

Test sponsor: Cisco Systems

Hardware Availability: May-2015

Tested by: Cisco Systems

Software Availability: Mar-2015

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
        4 "physical id"s (chips)
        72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 18
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:       1056733548 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 9 16:59
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdd1        ext4  230G  13G  206G  6% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp2006 = 109

SPECfp_base2006 = 103

CPU2006 license: 9019

Test date: Jun-2015

Test sponsor: Cisco Systems

Hardware Availability: May-2015

Tested by: Cisco Systems

Software Availability: Mar-2015

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C460M4.2.0.5.0.050520150627 05/05/2015

Memory:

64x 0xCE00 M393A2G40DB0-CPB 16 GB 2 rank 1600 MHz
32x NO DIMM NO DIMM 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

OMP_NUM_THREADS = "36"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp2006 = 109

SPECfp_base2006 = 103

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Mar-2015

Base Portability Flags (Continued)

```
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp2006 =

109

SPECfp_base2006 =

103

CPU2006 license: 9019

Test date: Jun-2015

Test sponsor: Cisco Systems

Hardware Availability: May-2015

Tested by: Cisco Systems

Software Availability: Mar-2015

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp2006 = 109

SPECfp_base2006 = 103

CPU2006 license: 9019

Test date: Jun-2015

Test sponsor: Cisco Systems

Hardware Availability: May-2015

Tested by: Cisco Systems

Software Availability: Mar-2015

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 8 11:07:25 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 July 2015.