



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**HITACHI**

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp®\_rate2006 = 3920**

**SPECfp\_rate\_base2006 = 3810**

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Mar-2015

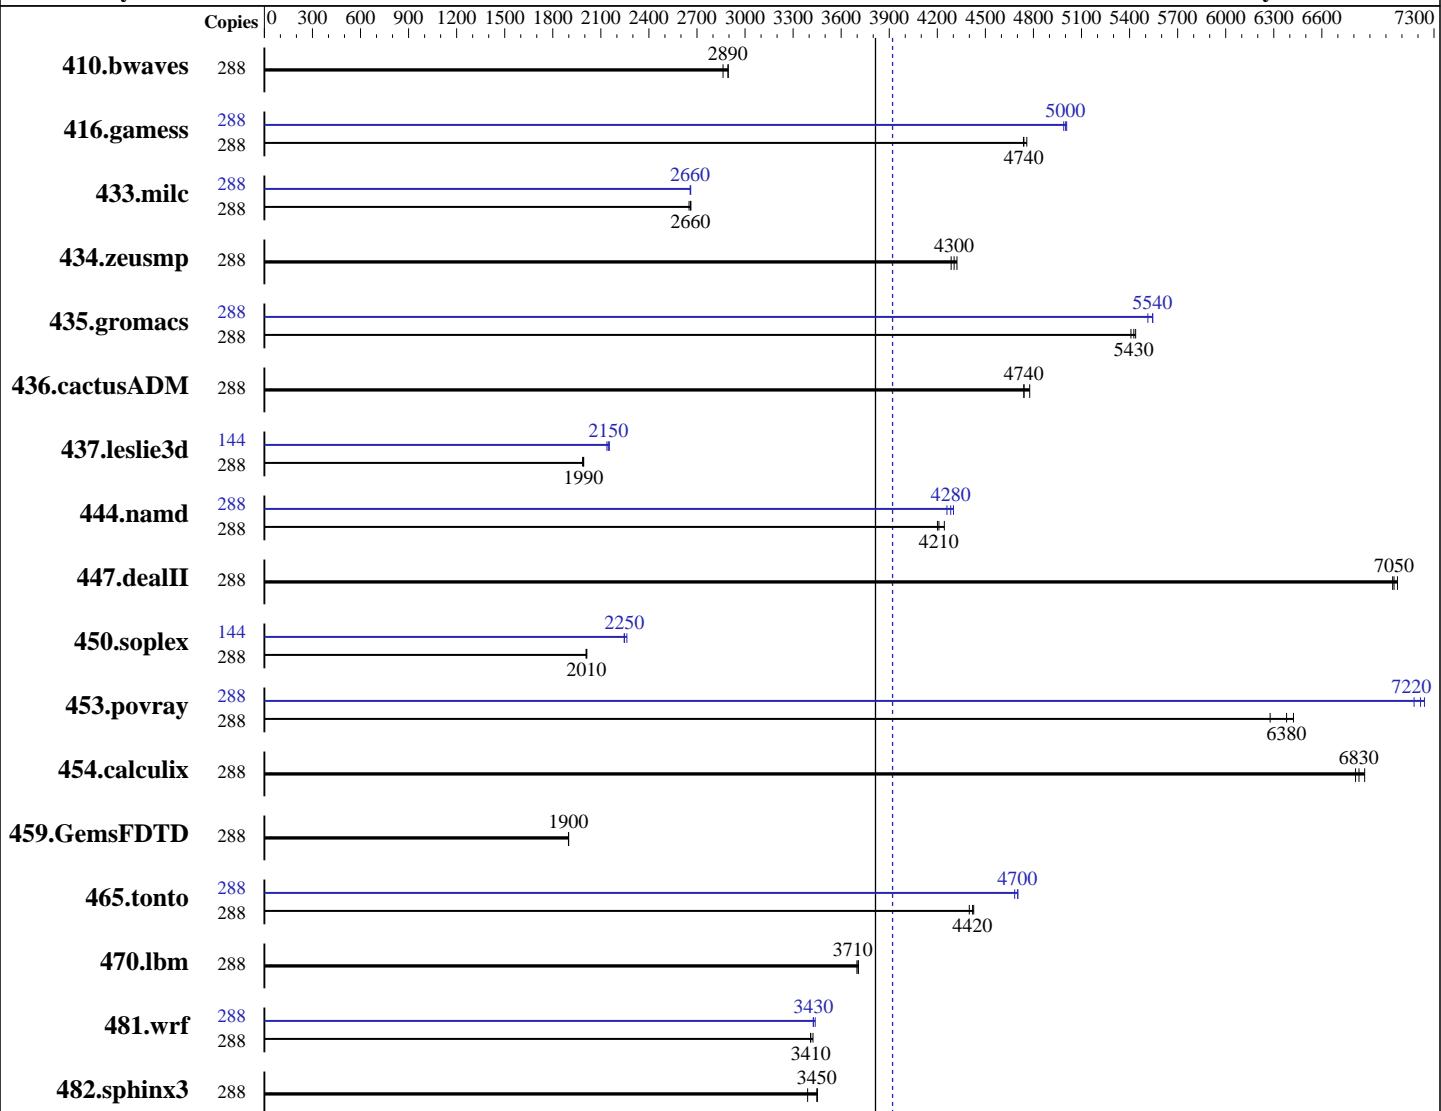

**SPECfp\_rate\_base2006 = 3810**

**SPECfp\_rate2006 = 3920**

## Hardware

CPU Name: Intel Xeon E7-8890 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4,8 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
Compiler: 3.10.0-229.el7.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**HITACHI**

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

CPU2006 license: 35

Test date: Jul-2015

Test sponsor: HITACHI

Hardware Availability: Jun-2015

Tested by: HITACHI

Software Availability: Mar-2015

L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	2 x 300 GB SAS, 15000 RPM, RAID1
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	none

## Results Table

Benchmark	Base							Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	
410.bwaves	288	1352	2900	<u>1353</u>	<u>2890</u>	1367	2860	288	1352	2900	<u>1353</u>	<u>2890</u>	1367	2860	
416.gamess	288	<u>1190</u>	<u>4740</u>	1190	4740	1185	4760	288	1126	5010	<u>1128</u>	<u>5000</u>	1130	4990	
433.milc	288	993	2660	<u>994</u>	<u>2660</u>	998	2650	288	994	2660	<u>994</u>	<u>2660</u>	994	2660	
434.zeusmp	288	<u>609</u>	<u>4300</u>	606	4320	611	4290	288	<u>609</u>	<u>4300</u>	606	4320	611	4290	
435.gromacs	288	378	5440	380	5410	<u>379</u>	<u>5430</u>	288	<u>371</u>	<u>5540</u>	373	5510	371	5550	
436.cactusADM	288	<u>726</u>	<u>4740</u>	720	4780	726	4740	288	<u>726</u>	<u>4740</u>	720	4780	726	4740	
437.leslie3d	288	1359	1990	1363	1990	<u>1359</u>	<u>1990</u>	288	<u>144</u>	<u>631</u>	<u>2150</u>	629	2150	633	2140
444.namd	288	544	4240	<u>549</u>	<u>4210</u>	550	4200	288	542	4260	537	4300	<u>539</u>	<u>4280</u>	
447.dealII	288	468	7040	466	7070	<u>467</u>	<u>7050</u>	288	468	7040	466	7070	<u>467</u>	<u>7050</u>	
450.soplex	288	1193	2010	1196	2010	<u>1195</u>	<u>2010</u>	288	144	531	2260	<u>534</u>	<u>2250</u>	535	2250
453.povray	288	239	6420	244	6280	<u>240</u>	<u>6380</u>	288	212	7240	<u>212</u>	<u>7220</u>	214	7180	
454.calculix	288	346	6870	<u>348</u>	<u>6830</u>	349	6810	288	346	6870	<u>348</u>	<u>6830</u>	349	6810	
459.GemsFDTD	288	1610	1900	1609	1900	<u>1609</u>	<u>1900</u>	288	1610	1900	1609	1900	<u>1609</u>	<u>1900</u>	
465.tonto	288	<u>641</u>	<u>4420</u>	640	4430	644	4400	288	<u>603</u>	<u>4700</u>	605	4680	603	4700	
470.lbm	288	<u>1068</u>	<u>3710</u>	1070	3700	1068	3710	288	<u>1068</u>	<u>3710</u>	1070	3700	1068	3710	
481.wrf	288	944	3410	<u>943</u>	<u>3410</u>	940	3420	288	<u>939</u>	<u>3430</u>	936	3440	939	3430	
482.sphinx3	288	1626	3450	1655	3390	<u>1628</u>	<u>3450</u>	288	1626	3450	1655	3390	<u>1628</u>	<u>3450</u>	

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

C-State = Disable

C1 Enhanced Mode = Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

CPU2006 license: 35

Test date: Jul-2015

Test sponsor: HITACHI

Hardware Availability: Jun-2015

Tested by: HITACHI

Software Availability: Mar-2015

## Platform Notes (Continued)

```
EnergyEfficientTurbo = Disable
ProcessorPerformanceStates = Disable
UncoreFrequencyScaling = Disable
Platform Controlled Type = Maximum Performance
Memory Power Management = Disable
Patrol Scrub = Disable
```

```
Sysinfo program /home/spec/speccpu2006/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Sat Jul 11 03:09:44 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
        8 "physical id"s (chips)
        288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 36
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      2112874400 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Mar-2015

## Platform Notes (Continued)

```
uname -a:  
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38  
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 11 01:50
```

```
SPEC is set to: /home/spec/speccpu2006/cpu2006  
Filesystem           Type  Size  Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs   364G   13G  352G   4% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HITACHI 09-14 07/09/2015

Memory:

```
64x NO DIMM Unknown  
1x Samsung M39.A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
127x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/spec/speccpu2006/cpu2006/libs/32:/home/spec/speccpu2006/cpu2006/libs/64:/home/spec/speccpu2006/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

BladeSymphony BS520X, BladeSymphony BS2500 and Hitachi Compute Blade 520X are electronically equivalent. The results have been measured on a Hitachi Compute Blade 520X.

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Mar-2015

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Mar-2015

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Mar-2015

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
           -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
           -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
           -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-prefetch -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3920**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Jul-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Mar-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.20150729.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.20150729.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 29 12:11:11 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 July 2015.