SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp®_rate2006 = 470

SPECfp_rate_base2006 = 455

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

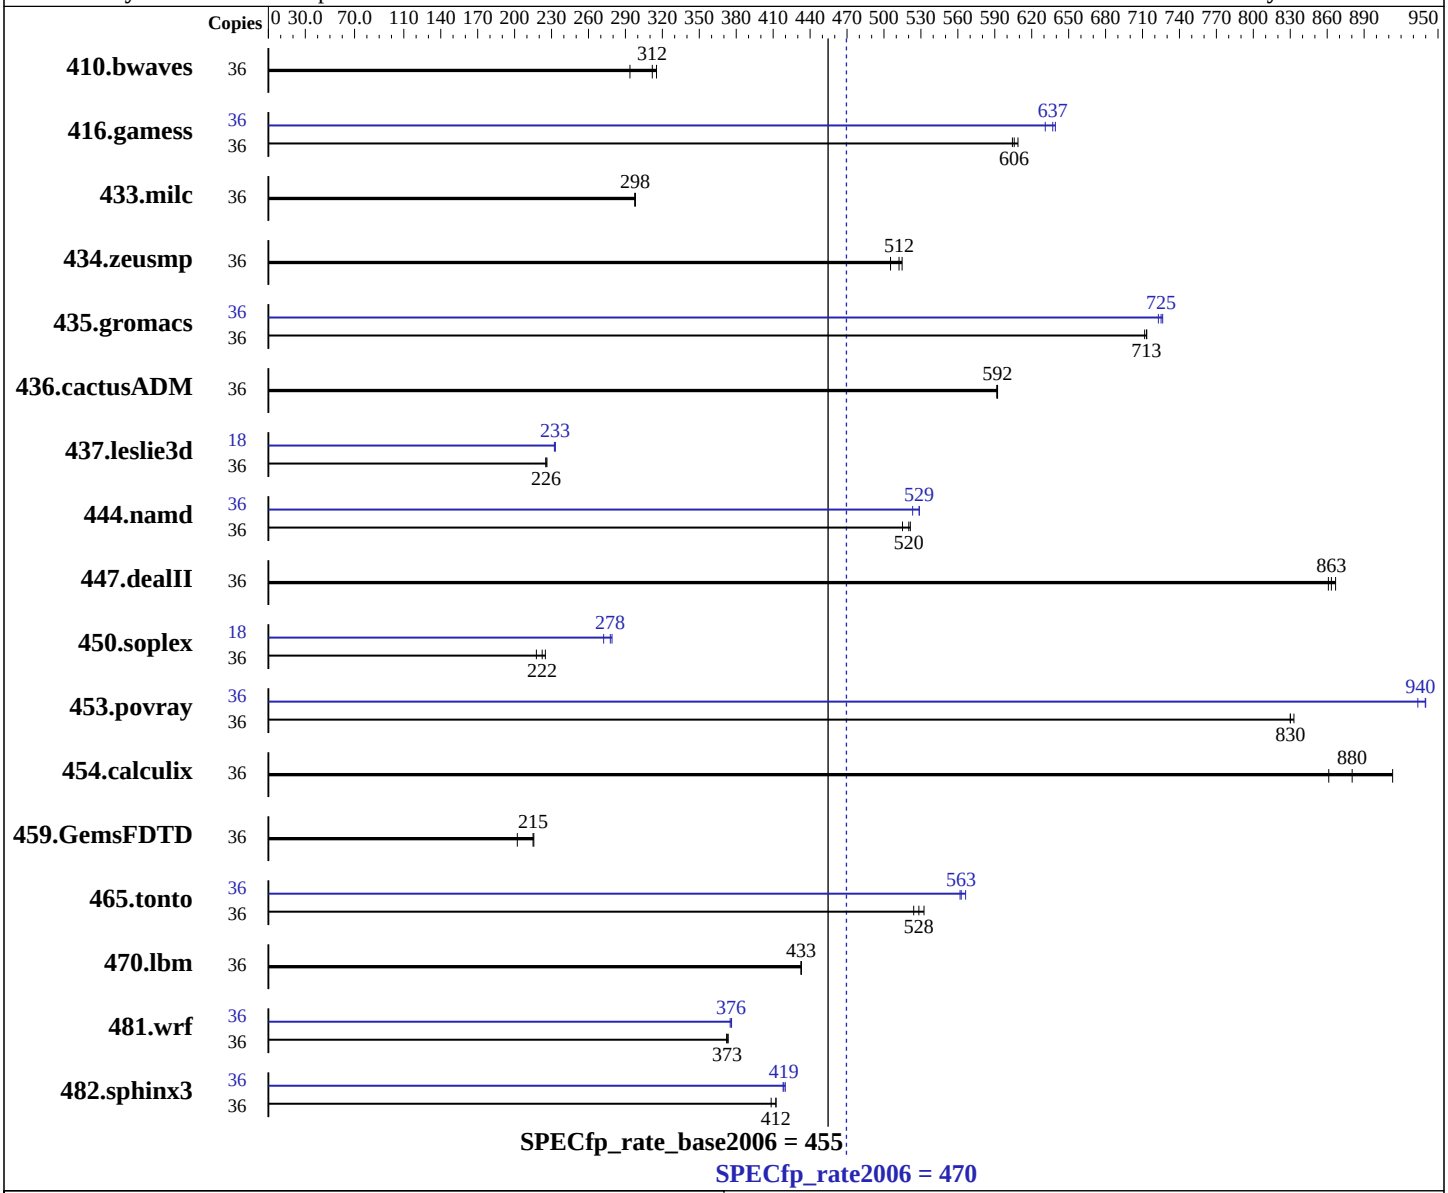

Hardware

CPU Name:	Intel Xeon E5-2699 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	18 cores, 1 chip, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.6 (Santiago) Kernel 2.6.32-504.el6.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 455

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: NEC Storage M100 via Fibre Channel (See additional details below)
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	36	1552	315	**1569**	**312**	1666	294	36	1552	315	**1569**	**312**	1666	294
416.gamess	36	**1164**	**606**	1166	604	1158	609	36	1103	639	1117	631	**1106**	**637**
433.milc	36	1110	298	1109	298	**1110**	**298**	36	1110	298	1109	298	**1110**	**298**
434.zeusmp	36	**640**	**512**	636	515	648	505	36	**640**	**512**	636	515	648	505
435.gromacs	36	360	713	**360**	**713**	361	712	36	356	723	**354**	**725**	354	726
436.cactusADM	36	726	592	727	592	**726**	**592**	36	726	592	727	592	**726**	**592**
437.leslie3d	36	**1500**	**226**	1502	225	1496	226	18	**726**	**233**	728	232	726	233
444.namd	36	554	521	561	515	**555**	**520**	36	546	529	552	523	**546**	**529**
447.dealII	36	478	861	475	867	**477**	**863**	36	478	861	475	867	**477**	**863**
450.soplex	36	1335	225	**1350**	**222**	1379	218	18	551	272	538	279	**541**	**278**
453.povray	36	231	830	**231**	**830**	230	833	36	204	940	**204**	**940**	205	934
454.calculix	36	325	913	345	861	**337**	**880**	36	325	913	345	861	**337**	**880**
459.GemsFDTD	36	1772	216	**1777**	**215**	1889	202	36	1772	216	**1777**	**215**	1889	202
465.tonto	36	665	533	676	524	**670**	**528**	36	631	562	**629**	**563**	626	566
470.lbm	36	**1143**	**433**	1143	433	1143	433	36	**1143**	**433**	1143	433	1143	433
481.wrf	36	1077	374	1081	372	**1079**	**373**	36	1072	375	1069	376	**1070**	**376**
482.sphinx3	36	1702	412	**1702**	**412**	1718	408	36	1671	420	**1676**	**419**	1678	418

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Performance Preferred
 Patrol Scrub: Disabled
 Cluster on Die: Enabled

Storage Configuration for Disk Subsystem:
 NEC Storage M100 has 4 x 600 GB 10000 RPM SAS disks under RAID-10 configuration
 mounted over 8Gbps Fibre Channel interface with these options
 "defaults" in the /etc/fstab.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 25 17:53:05 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 August 2015.