



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp®_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jul-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

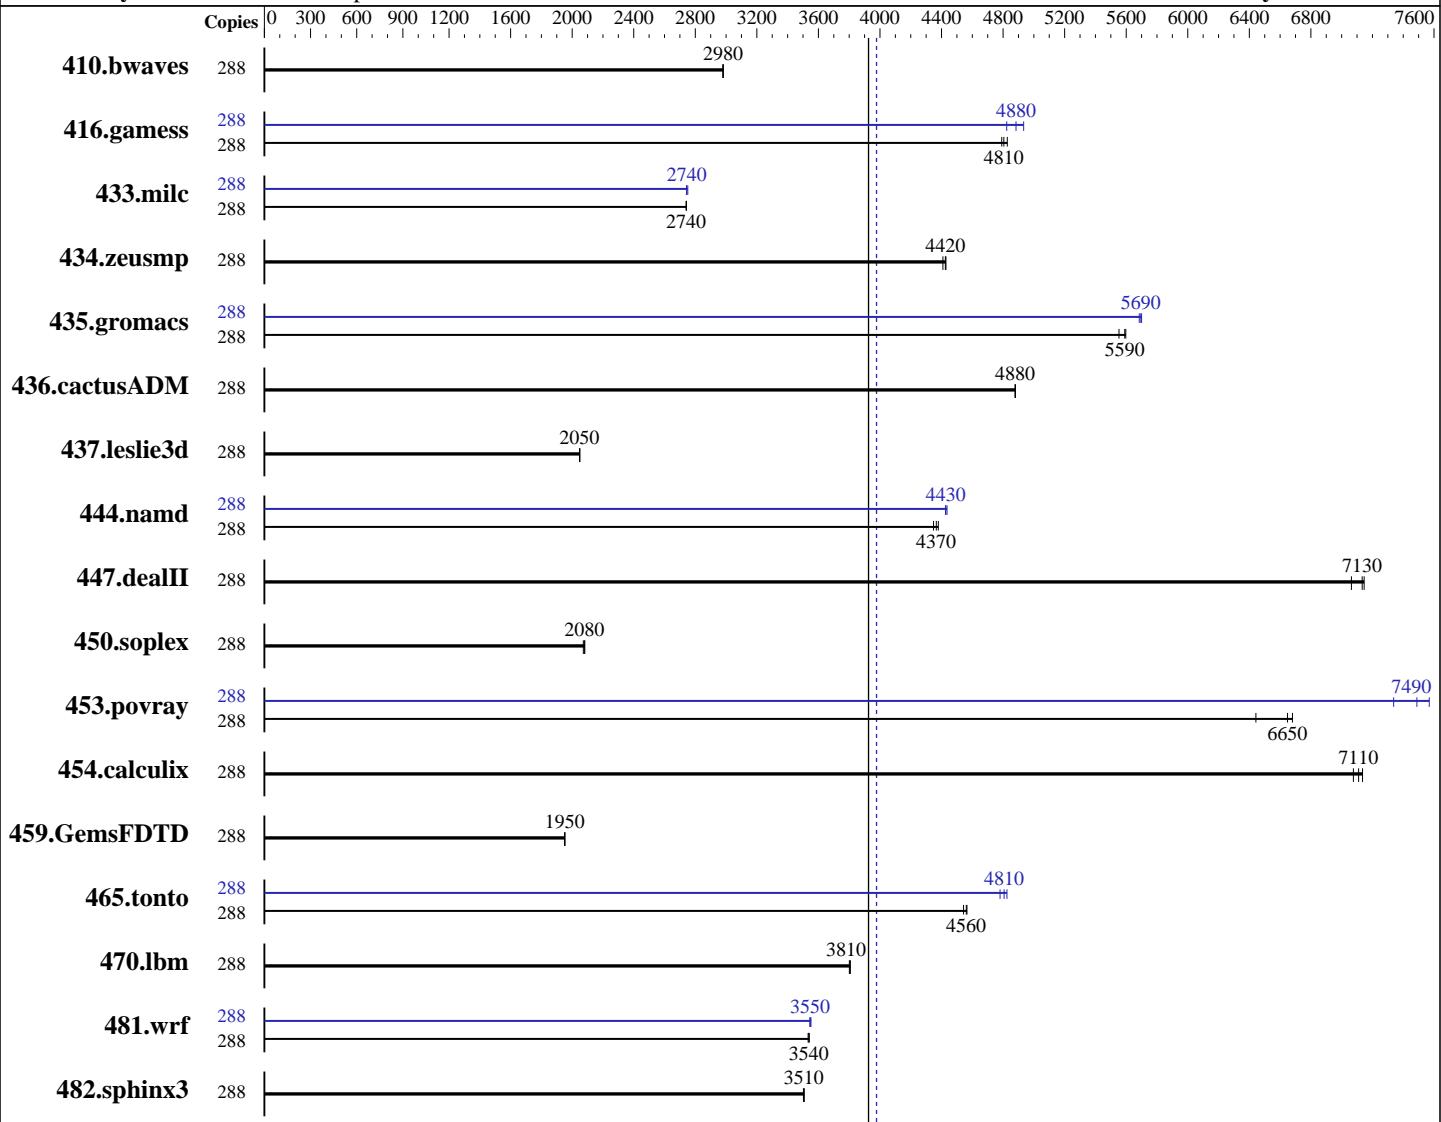

Hardware

CPU Name: Intel Xeon E7-8890 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 4,6,8 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linus Enterprise Server 12 (x86_64)
3.12.28-4-default
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE
for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran
Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	288	1314	2980	<u>1313</u>	<u>2980</u>	1313	2980	288	1314	2980	<u>1313</u>	<u>2980</u>	1313	2980
416.gamess	288	<u>1174</u>	<u>4810</u>	1177	4790	1168	4830	288	<u>1143</u>	4930	1169	4820	<u>1155</u>	<u>4880</u>
433.milc	288	965	2740	964	2740	<u>964</u>	<u>2740</u>	288	<u>963</u>	<u>2740</u>	961	2750	964	2740
434.zeusmp	288	592	4430	<u>592</u>	<u>4420</u>	594	4410	288	592	4430	<u>592</u>	<u>4420</u>	594	4410
435.gromacs	288	<u>368</u>	<u>5590</u>	370	5550	367	5600	288	361	5700	362	5680	<u>361</u>	<u>5690</u>
436.cactusADM	288	706	4880	<u>705</u>	<u>4880</u>	705	4880	288	706	4880	<u>705</u>	<u>4880</u>	705	4880
437.leslie3d	288	<u>1322</u>	<u>2050</u>	1321	2050	1322	2050	288	<u>1322</u>	<u>2050</u>	1321	2050	1322	2050
444.namd	288	<u>529</u>	<u>4370</u>	527	4380	531	4350	288	<u>521</u>	4440	<u>522</u>	<u>4430</u>	522	4430
447.dealII	288	461	7150	<u>462</u>	<u>7130</u>	466	7060	288	461	7150	<u>462</u>	<u>7130</u>	466	7060
450.soplex	288	<u>1155</u>	<u>2080</u>	1154	2080	1159	2070	288	<u>1155</u>	<u>2080</u>	1154	2080	1159	2070
453.povray	288	<u>230</u>	<u>6650</u>	229	6680	238	6440	288	209	7340	202	7570	<u>205</u>	<u>7490</u>
454.calculix	288	<u>334</u>	<u>7110</u>	336	7080	333	7140	288	<u>334</u>	<u>7110</u>	336	7080	333	7140
459.GemsFDTD	288	1566	1950	<u>1565</u>	<u>1950</u>	1565	1950	288	1566	1950	<u>1565</u>	<u>1950</u>	1565	1950
465.tonto	288	624	4540	621	4570	<u>621</u>	<u>4560</u>	288	593	4780	<u>590</u>	<u>4810</u>	587	4830
470.lbm	288	1041	3800	<u>1040</u>	<u>3810</u>	1039	3810	288	1041	3800	<u>1040</u>	<u>3810</u>	1039	3810
481.wrf	288	<u>909</u>	<u>3540</u>	911	3530	909	3540	288	<u>907</u>	<u>3550</u>	908	3540	906	3550
482.sphinx3	288	1600	3510	<u>1601</u>	<u>3510</u>	1602	3500	288	1600	3510	<u>1601</u>	<u>3510</u>	1602	3500

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Custom in BIOS
Cstates disabled in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6914
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-u101 Sat Jul 25 05:06:02 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
        8 "physical id"s (chips)
        288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 36
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      2117565168 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 0
    # This file is deprecated and will be removed in a future service pack or
    # release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

```
Linux linux-u101 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 24 15:59 last=5
```

```
SPEC is set to: /cpu2006.1.2
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	278G	8.0G	270G	3%	/

```
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS IBM -[A9E121SUS-1.00]- 03/13/2015
```

Memory:

114x Hynix HMA42GR7MFR4N-TF	16 GB	2 rank	2133 MHz	configured at 1600 MHz
14x Micron 36ASF2G72PZ-2G1A2	16 GB	2 rank	2133 MHz	configured at 1600 MHz
64x NO DIMM	Unknown			

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jul-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

fort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8890 v3, 2.50 GHz)

SPECfp_rate2006 = 3980

SPECfp_rate_base2006 = 3930

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 14 15:58:28 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 August 2015.