SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECfp®_rate2006 = 406

SPECfp_rate_base2006 = 400

CPU2006 license: 3834
Test sponsor: ZTE
Tested by: ZTE

Test date: Aug-2015
Hardware Availability: Sep-2013
Software Availability: Sep-2014

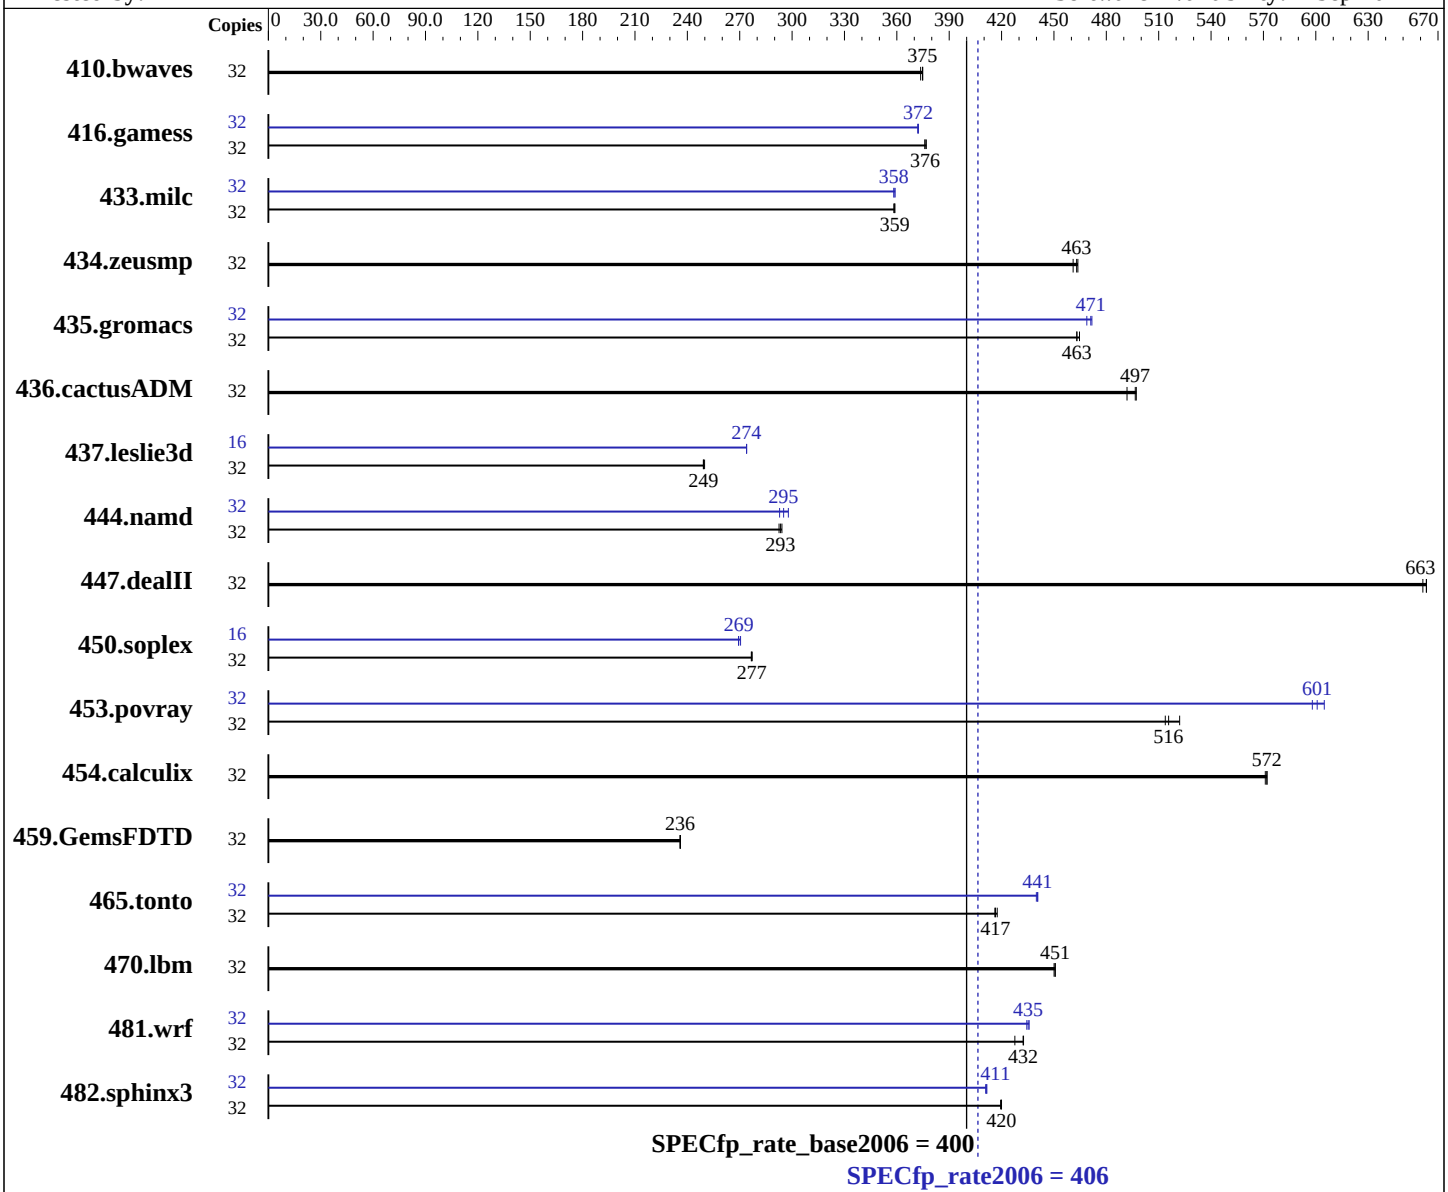

Hardware

CPU Name:	Intel Xeon E5-2628L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0(Maipo) 3.10.0-121.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECfp_rate2006 = 406

SPECfp_rate_base2006 = 400

CPU2006 license: 3834
Test sponsor: ZTE
Tested by: ZTE

Test date: Aug-2015
Hardware Availability: Sep-2013
Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-10600R-9 ECC)
Disk Subsystem: 1 x 300 GB SAS, 10K RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1160	375	**1161**	**375**	1164	374	32	1160	375	**1161**	**375**	1164	374
416.gamess	32	1662	377	**1666**	**376**	1666	376	32	**1684**	**372**	1683	372	1684	372
433.milc	32	819	359	**819**	**359**	820	358	32	**820**	**358**	818	359	820	358
434.zeusmp	32	632	461	**629**	**463**	628	464	32	632	461	**629**	**463**	628	464
435.gromacs	32	**493**	**463**	493	463	492	465	32	**485**	**471**	487	469	484	472
436.cactusADM	32	769	497	**770**	**497**	777	492	32	769	497	**770**	**497**	777	492
437.leslie3d	32	1207	249	1204	250	**1207**	**249**	16	**549**	**274**	549	274	549	274
444.namd	32	877	293	872	294	**875**	**293**	32	876	293	**870**	**295**	862	298
447.dealII	32	554	661	552	663	**552**	**663**	32	554	661	552	663	**552**	**663**
450.soplex	32	963	277	**964**	**277**	965	277	16	496	269	**495**	**269**	493	270
453.povray	32	**330**	**516**	331	514	326	522	32	281	605	**283**	**601**	285	598
454.calculix	32	461	572	462	571	**462**	**572**	32	461	572	462	571	**462**	**572**
459.GemsFDTD	32	**1439**	**236**	1440	236	1438	236	32	**1439**	**236**	1440	236	1438	236
465.tonto	32	757	416	754	418	**756**	**417**	32	**715**	**441**	716	440	714	441
470.lbm	32	975	451	977	450	**976**	**451**	32	975	451	977	450	**976**	**451**
481.wrf	32	**827**	**432**	836	428	826	433	32	820	436	**821**	**435**	823	434
482.sphinx3	32	**1485**	**420**	1487	419	1485	420	32	1518	411	**1516**	**411**	1516	411

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Turbo boost Technology enabled
Virualization Technology disabled
```

Continued on next page

Platform Notes (Continued)

```
Hyper Threading Technology enabled
Sysinfo program /home/speccpu/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ 2b55956e7c0e338e808a36a21505f13a
running on localhost.localdomain Thu Aug  6 23:59:52 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       131796012 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19
   EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 6 08:23

SPEC is set to: /home/speccpu
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   225G   47G  179G  21% /home
Additional information from dmidecode:
```

Continued on next page

Platform Notes (Continued)

```
      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. CORE4.6.5_UBF3.10.49_SVN57833 05/06/2015
    Memory:
     8x Micron 36KSF2G72PZ-1 16 GB 2 rank 1333 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Base Portability Flags (Continued)

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -prof-gen(pass 1) -ipo -O3 -no-prec-div
-opt-mem-layout-trans=3 -prof-use(pass 2) -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 8 22:40:46 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 September 2015.