SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M2, Intel Core i3-6100, 3.70 GHz

SPECfp®_rate2006 = 134

SPECfp_rate_base2006 = 132

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

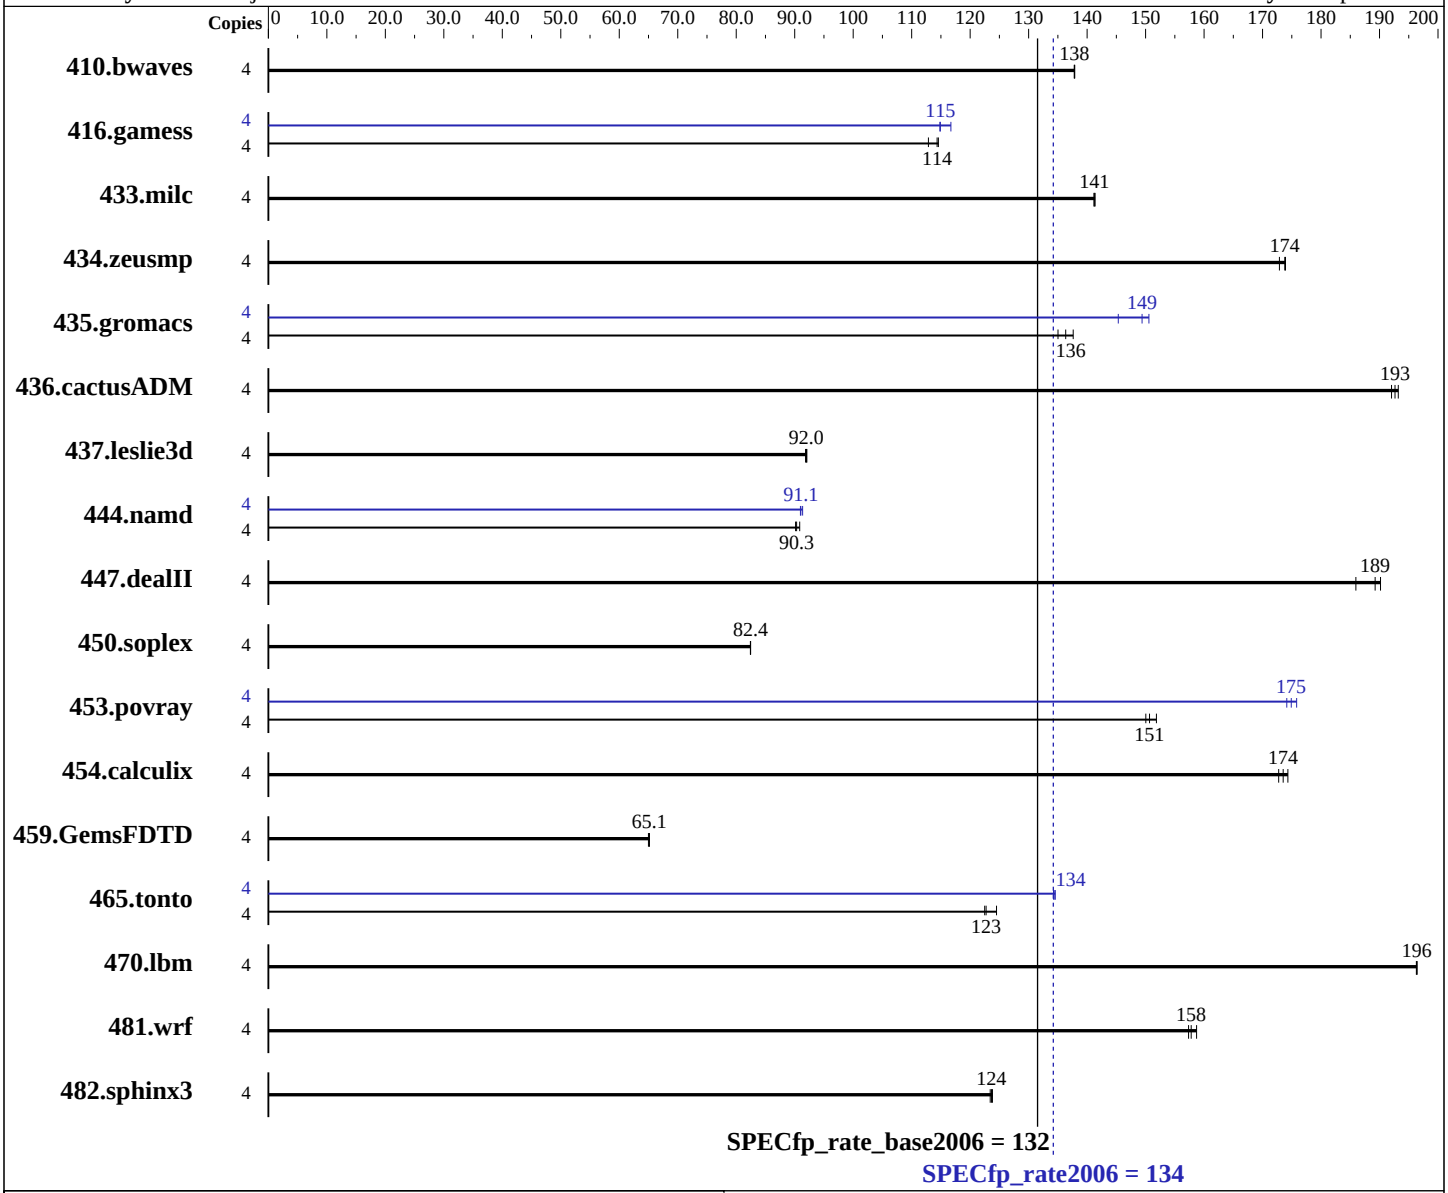

Hardware

CPU Name:	Intel Core i3-6100
CPU Characteristics:	
CPU MHz:	3700
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) Kernel 3.12.48-52.27-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M2, Intel Core i3-6100, 3.70 GHz

SPECfp_rate2006 = 134

SPECfp_rate_base2006 = 132

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	394	138	394	138	**394**	**138**	4	394	138	394	138	**394**	**138**
416.gamess	4	**685**	**114**	684	115	694	113	4	682	115	**682**	**115**	671	117
433.milc	4	**260**	**141**	260	141	260	141	4	**260**	**141**	260	141	260	141
434.zeusmp	4	**209**	**174**	209	174	211	173	4	**209**	**174**	209	174	211	173
435.gromacs	4	212	135	208	138	**209**	**136**	4	190	151	**191**	**149**	197	145
436.cactusADM	4	**248**	**193**	247	193	249	192	4	**248**	**193**	247	193	249	192
437.leslie3d	4	**409**	**92.0**	409	91.9	408	92.1	4	**409**	**92.0**	409	91.9	408	92.1
444.namd	4	356	90.1	**355**	**90.3**	353	90.9	4	351	91.4	**352**	**91.1**	353	91.0
447.dealII	4	246	186	**242**	**189**	241	190	4	246	186	**242**	**189**	241	190
450.soplex	4	405	82.5	**405**	**82.4**	405	82.4	4	405	82.5	**405**	**82.4**	405	82.4
453.povray	4	142	150	140	152	**141**	**151**	4	121	176	**122**	**175**	122	174
454.calculix	4	189	174	191	173	**190**	**174**	4	189	174	191	173	**190**	**174**
459.GemsFDTD	4	**652**	**65.1**	653	65.0	651	65.2	4	**652**	**65.1**	653	65.0	651	65.2
465.tonto	4	**321**	**123**	316	125	321	122	4	293	135	**293**	**134**	293	134
470.lbm	4	280	196	**280**	**196**	280	196	4	280	196	**280**	**196**	280	196
481.wrf	4	**283**	**158**	284	157	282	159	4	**283**	**158**	284	157	282	159
482.sphinx3	4	630	124	**630**	**124**	632	123	4	630	124	**630**	**124**	632	123

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
```

Continued on next page

Platform Notes (Continued)

```
running on RX1330M2 Tue Nov 24 22:29:26 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Core(TM) i3-6100 CPU @ 3.70GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 2
      siblings  : 4
      physical 0: cores 0 1
   cache size : 3072 KB

From /proc/meminfo
   MemTotal:       65905596 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux RX1330M2 3.12.48-52.27-default #1 SMP Mon Oct 5 10:08:10 UTC 2015
   (314f0e3) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Nov 23 17:36

SPEC is set to: /home/SPECcpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   424G  8.0G  416G   2% /home
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.0.0 for D3375-A1x
   10/27/2015
   Memory:
    4x SK Hynix HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 30 19:58:36 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 December 2015.