SPEC® CFP2006 Result

Fujitsu

PRIMERGY TX1320 M2, Intel Celeron G3900, 2.80 GHz

SPECfp®_rate2006 = 91.7

SPECfp_rate_base2006 = 90.9

CPU2006 license:	19	**Test date:**	Dec-2015
Test sponsor:	Fujitsu	**Hardware Availability:**	Feb-2016
Tested by:	Fujitsu	**Software Availability:**	Sep-2015

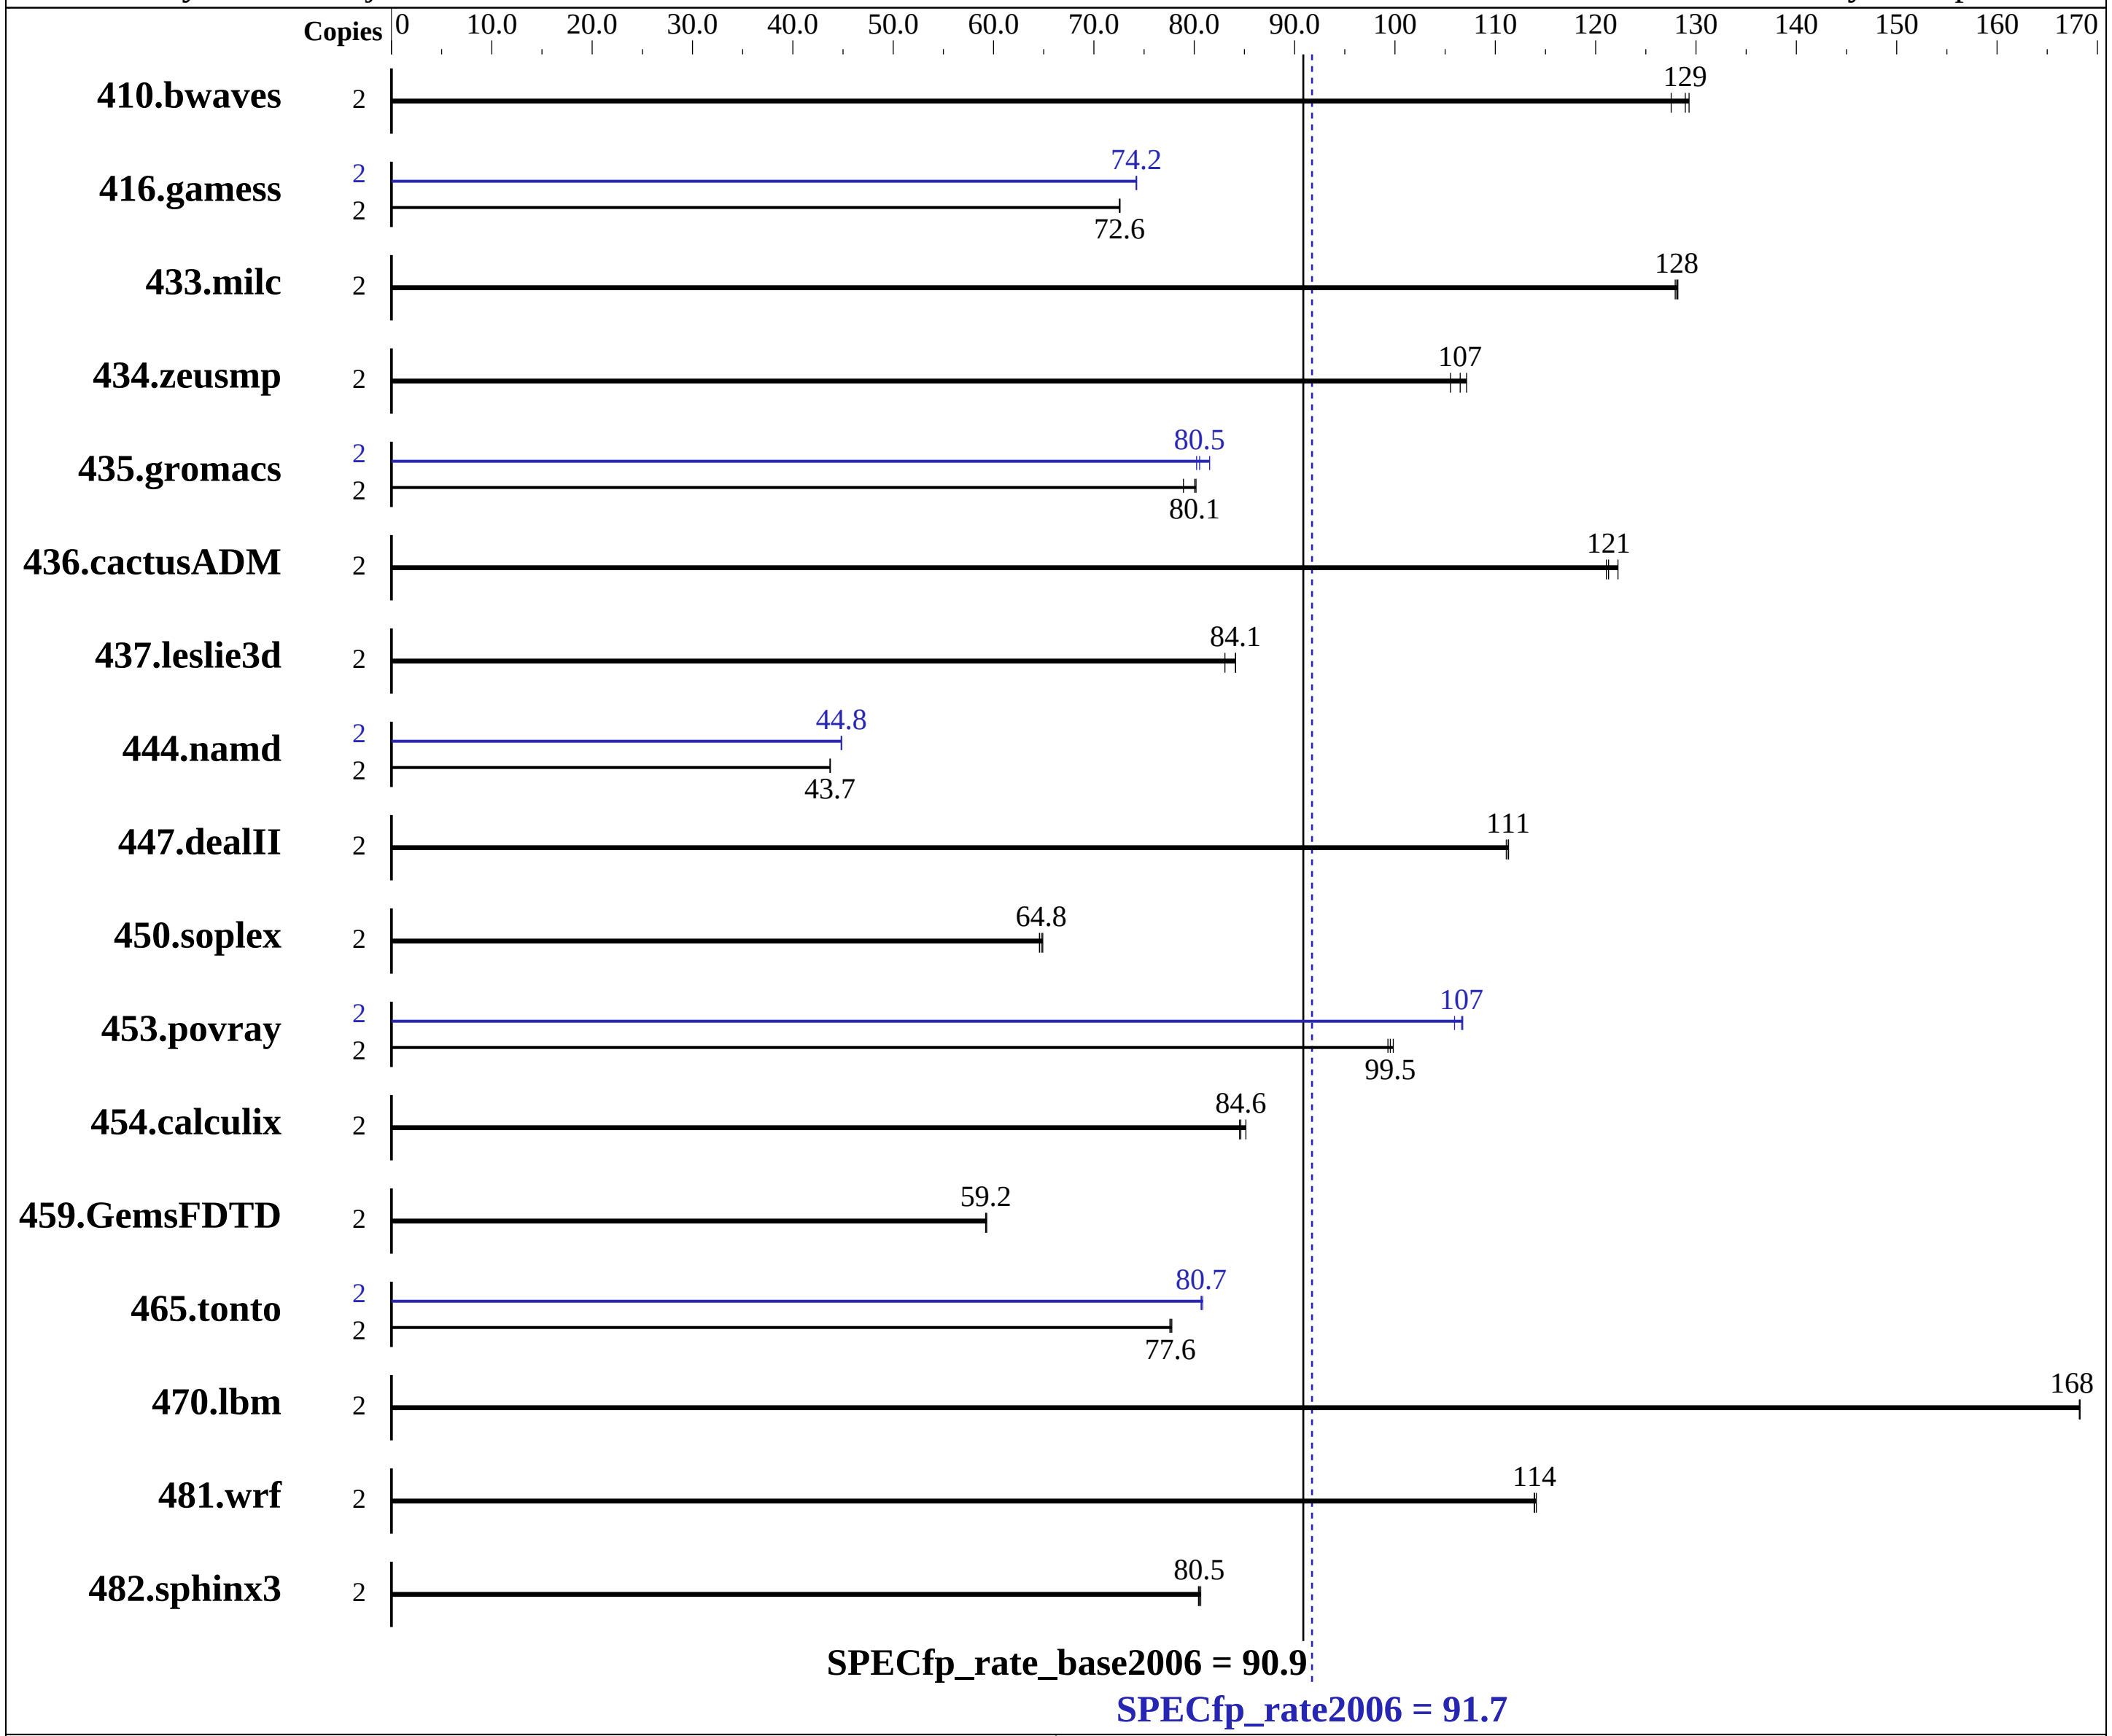

Hardware

CPU Name:	Intel Celeron G3900
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) Kernel 3.12.48-52.27-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Fujitsu

PRIMERGY TX1320 M2, Intel Celeron G3900, 2.80 GHz

SPECfp_rate2006 = 91.7

SPECfp_rate_base2006 = 90.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Dec-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	213	128	**211**	**129**	210	129	2	213	128	**211**	**129**	210	129
416.gamess	2	540	72.5	539	72.6	**540**	**72.6**	2	527	74.3	**528**	**74.2**	528	74.2
433.milc	2	143	128	144	128	**143**	**128**	2	143	128	144	128	**143**	**128**
434.zeusmp	2	172	106	170	107	**171**	**107**	2	172	106	170	107	**171**	**107**
435.gromacs	2	**178**	**80.1**	178	80.2	181	78.9	2	175	81.5	**177**	**80.5**	178	80.2
436.cactusADM	2	196	122	**197**	**121**	197	121	2	196	122	**197**	**121**	197	121
437.leslie3d	2	223	84.1	**224**	**84.1**	226	83.1	2	223	84.1	**224**	**84.1**	226	83.1
444.namd	2	367	43.7	**367**	**43.7**	367	43.7	2	**358**	**44.8**	358	44.9	358	44.8
447.dealII	2	206	111	**206**	**111**	206	111	2	206	111	**206**	**111**	206	111
450.soplex	2	257	64.9	**258**	**64.8**	258	64.6	2	257	64.9	**258**	**64.8**	258	64.6
453.povray	2	107	99.3	**107**	**99.5**	107	99.8	2	100	106	**99.8**	**107**	99.7	107
454.calculix	2	194	85.1	**195**	**84.6**	195	84.5	2	194	85.1	**195**	**84.6**	195	84.5
459.GemsFDTD	2	358	59.2	358	59.3	**358**	**59.2**	2	358	59.2	358	59.3	**358**	**59.2**
465.tonto	2	253	77.8	**254**	**77.6**	254	77.6	2	244	80.7	**244**	**80.7**	243	80.8
470.lbm	2	163	168	163	168	**163**	**168**	2	163	168	163	168	**163**	**168**
481.wrf	2	196	114	**196**	**114**	196	114	2	196	114	**196**	**114**	196	114
482.sphinx3	2	483	80.6	**484**	**80.5**	485	80.4	2	483	80.6	**484**	**80.5**	485	80.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
```

Continued on next page

Platform Notes (Continued)

```
running on TX1320M2 Thu Dec  3 19:38:40 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Celeron(R) CPU G3900 @ 2.80GHz
      1 "physical id"s (chips)
      2 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 2
      siblings  : 2
      physical 0: cores 0 1
   cache size : 2048 KB

From /proc/meminfo
   MemTotal:       65906892 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux TX1320M2 3.12.48-52.27-default #1 SMP Mon Oct 5 10:08:10 UTC 2015
   (314f0e3) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Dec 3 13:22

SPEC is set to: /home/SPECcpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   1.6T  6.3G  1.6T   1% /home
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.1.0 for D3373-A1x
   10/30/2015
   Memory:
    4x SK Hynix HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
    icc -m64

C++ benchmarks:
    icpc -m64

Fortran benchmarks:
    ifort -m64

Benchmarks using both Fortran and C:
    icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Fujitsu

PRIMERGY TX1320 M2, Intel Celeron G3900, 2.80 GHz

SPECfp_rate2006 = 91.7

SPECfp_rate_base2006 = 90.9

CPU2006 license:	19	**Test date:**	Dec-2015
Test sponsor:	Fujitsu	**Hardware Availability:**	Feb-2016
Tested by:	Fujitsu	**Software Availability:**	Sep-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Fujitsu

PRIMERGY TX1320 M2, Intel Celeron G3900, 2.80 GHz

SPECfp_rate2006 = 91.7

SPECfp_rate_base2006 = 90.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu
Test date: Dec-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 26 15:12:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 January 2016.