



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®\_rate2006 = 141**

Express5800/T110h (Intel Core i3-6300)

**SPECfp\_rate\_base2006 = 139**

CPU2006 license: 9006


Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

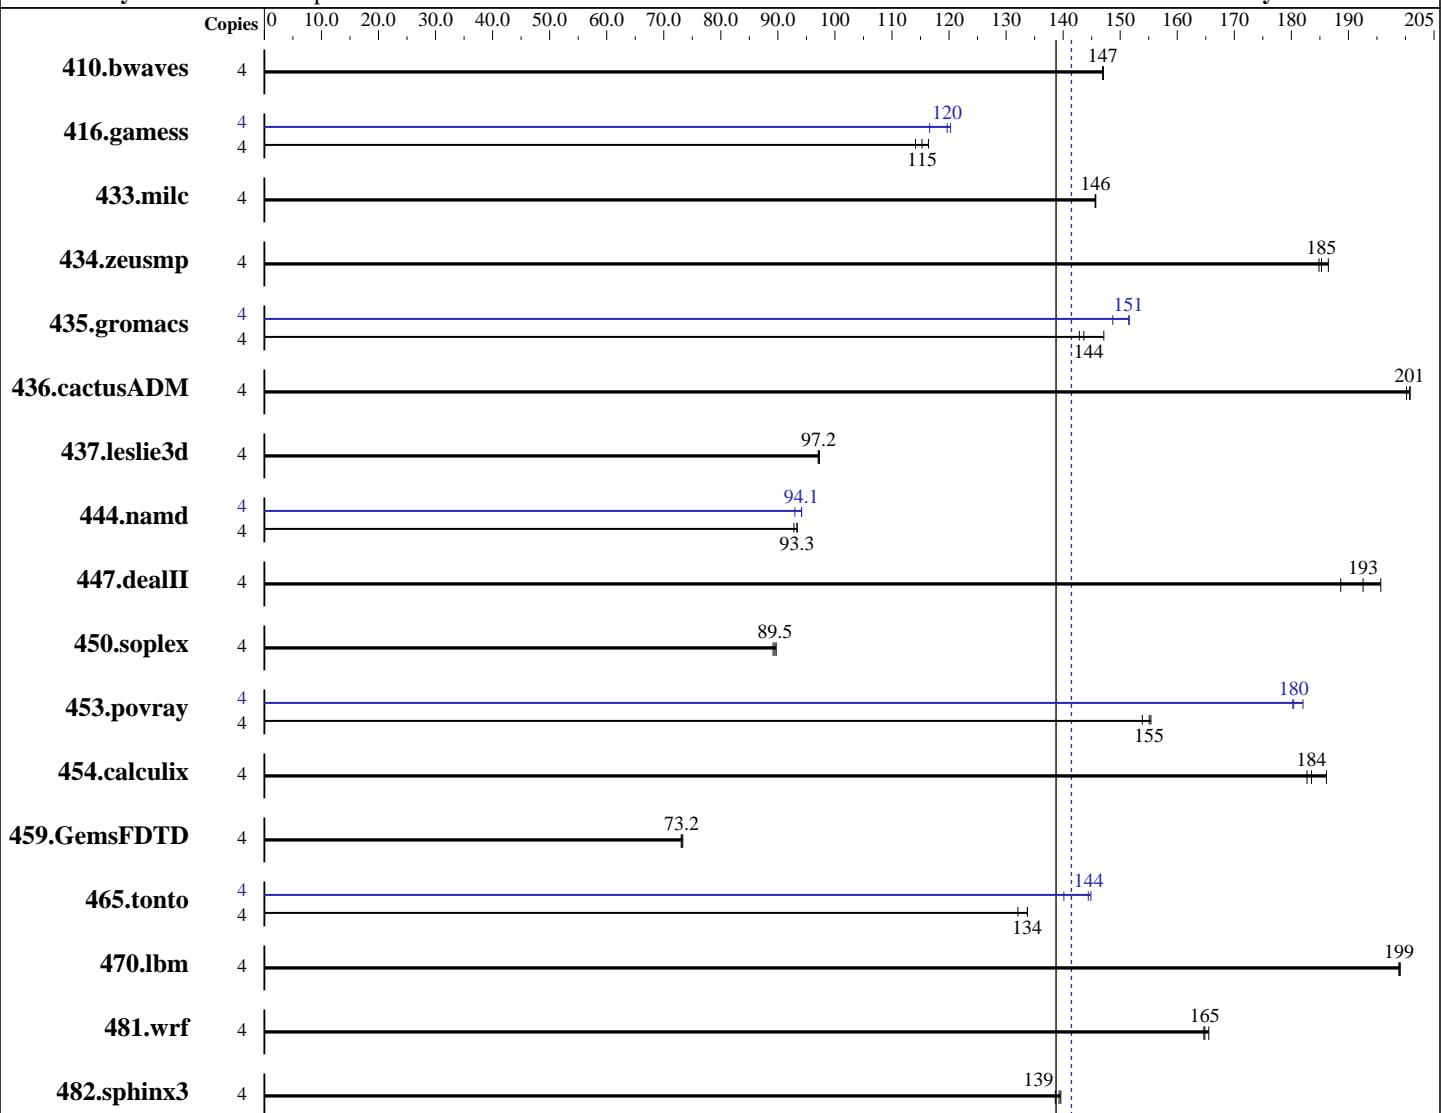

**SPECfp\_rate\_base2006 = 139**

**SPECfp\_rate2006 = 141**

## Hardware

CPU Name: Intel Core i3-6300  
CPU Characteristics:  
CPU MHz: 3800  
FPU: Integrated  
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
Compiler: Kernel 3.10.0-327.el7.x86\_64  
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 141**

Express5800/T110h (Intel Core i3-6300)

**SPECfp\_rate\_base2006 = 139**

**CPU2006 license:** 9006

**Test date:** Dec-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Mar-2016

**Tested by:** NEC Corporation

**Software Availability:** Nov-2015

L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	370	147	370	147	<b>370</b>	<b>147</b>	4	370	147	370	147	<b>370</b>	<b>147</b>
416.gamess	4	673	116	<b>679</b>	<b>115</b>	686	114	4	672	117	<b>654</b>	<b>120</b>	651	120
433.milc	4	252	146	252	146	<b>252</b>	<b>146</b>	4	252	146	252	146	<b>252</b>	<b>146</b>
434.zeusmp	4	195	186	197	185	<b>196</b>	<b>185</b>	4	195	186	197	185	<b>196</b>	<b>185</b>
435.gromacs	4	194	147	<b>199</b>	<b>144</b>	200	143	4	188	152	192	149	<b>189</b>	<b>151</b>
436.cactusADM	4	239	200	238	201	<b>238</b>	<b>201</b>	4	239	200	238	201	<b>238</b>	<b>201</b>
437.leslie3d	4	387	97.1	387	97.3	<b>387</b>	<b>97.2</b>	4	387	97.1	387	97.3	<b>387</b>	<b>97.2</b>
444.namd	4	<b>344</b>	<b>93.3</b>	344	93.4	346	92.8	4	341	94.2	345	93.0	<b>341</b>	<b>94.1</b>
447.dealII	4	234	196	<b>238</b>	<b>193</b>	243	189	4	234	196	<b>238</b>	<b>193</b>	243	189
450.soplex	4	<b>373</b>	<b>89.5</b>	374	89.2	372	89.7	4	<b>373</b>	<b>89.5</b>	374	89.2	372	89.7
453.povray	4	<b>137</b>	<b>155</b>	138	154	137	155	4	117	182	<b>118</b>	<b>180</b>	118	180
454.calculix	4	177	186	181	183	<b>180</b>	<b>184</b>	4	177	186	181	183	<b>180</b>	<b>184</b>
459.GemsFDTD	4	581	73.1	<b>580</b>	<b>73.2</b>	579	73.3	4	581	73.1	<b>580</b>	<b>73.2</b>	579	73.3
465.tonto	4	294	134	<b>294</b>	<b>134</b>	298	132	4	<b>273</b>	<b>144</b>	272	145	281	140
470.lbm	4	276	199	<b>276</b>	<b>199</b>	276	199	4	276	199	<b>276</b>	<b>199</b>	276	199
481.wrf	4	<b>271</b>	<b>165</b>	271	165	270	166	4	<b>271</b>	<b>165</b>	271	165	270	166
482.sphinx3	4	<b>560</b>	<b>139</b>	559	140	562	139	4	<b>560</b>	<b>139</b>	559	140	562	139

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom  
 Energy Performance: Performance



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T110h (Intel Core i3-6300)

**SPECfp\_rate2006 = 141**

**SPECfp\_rate\_base2006 = 139**

**CPU2006 license:** 9006

**Test date:** Dec-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Mar-2016

**Tested by:** NEC Corporation

**Software Availability:** Nov-2015

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110h (Intel Core i3-6300)

**SPECfp\_rate2006 = 141**

**SPECfp\_rate\_base2006 = 139**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Dec-2015

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110h (Intel Core i3-6300)

**SPECfp\_rate2006 = 141**

CPU2006 license: 9006

Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110h (Intel Core i3-6300)

**SPECfp\_rate2006 = 141**

**SPECfp\_rate\_base2006 = 139**

**CPU2006 license:** 9006

**Test date:** Dec-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Mar-2016

**Tested by:** NEC Corporation

**Software Availability:** Nov-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110h-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 9 17:21:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 February 2016.