# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkSever RD550
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECfp®_rate2006 = 1120

SPECfp_rate_base2006 = 1090

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Feb-2016
**Hardware Availability:** Mar-2016
**Software Availability:** Dec-2015

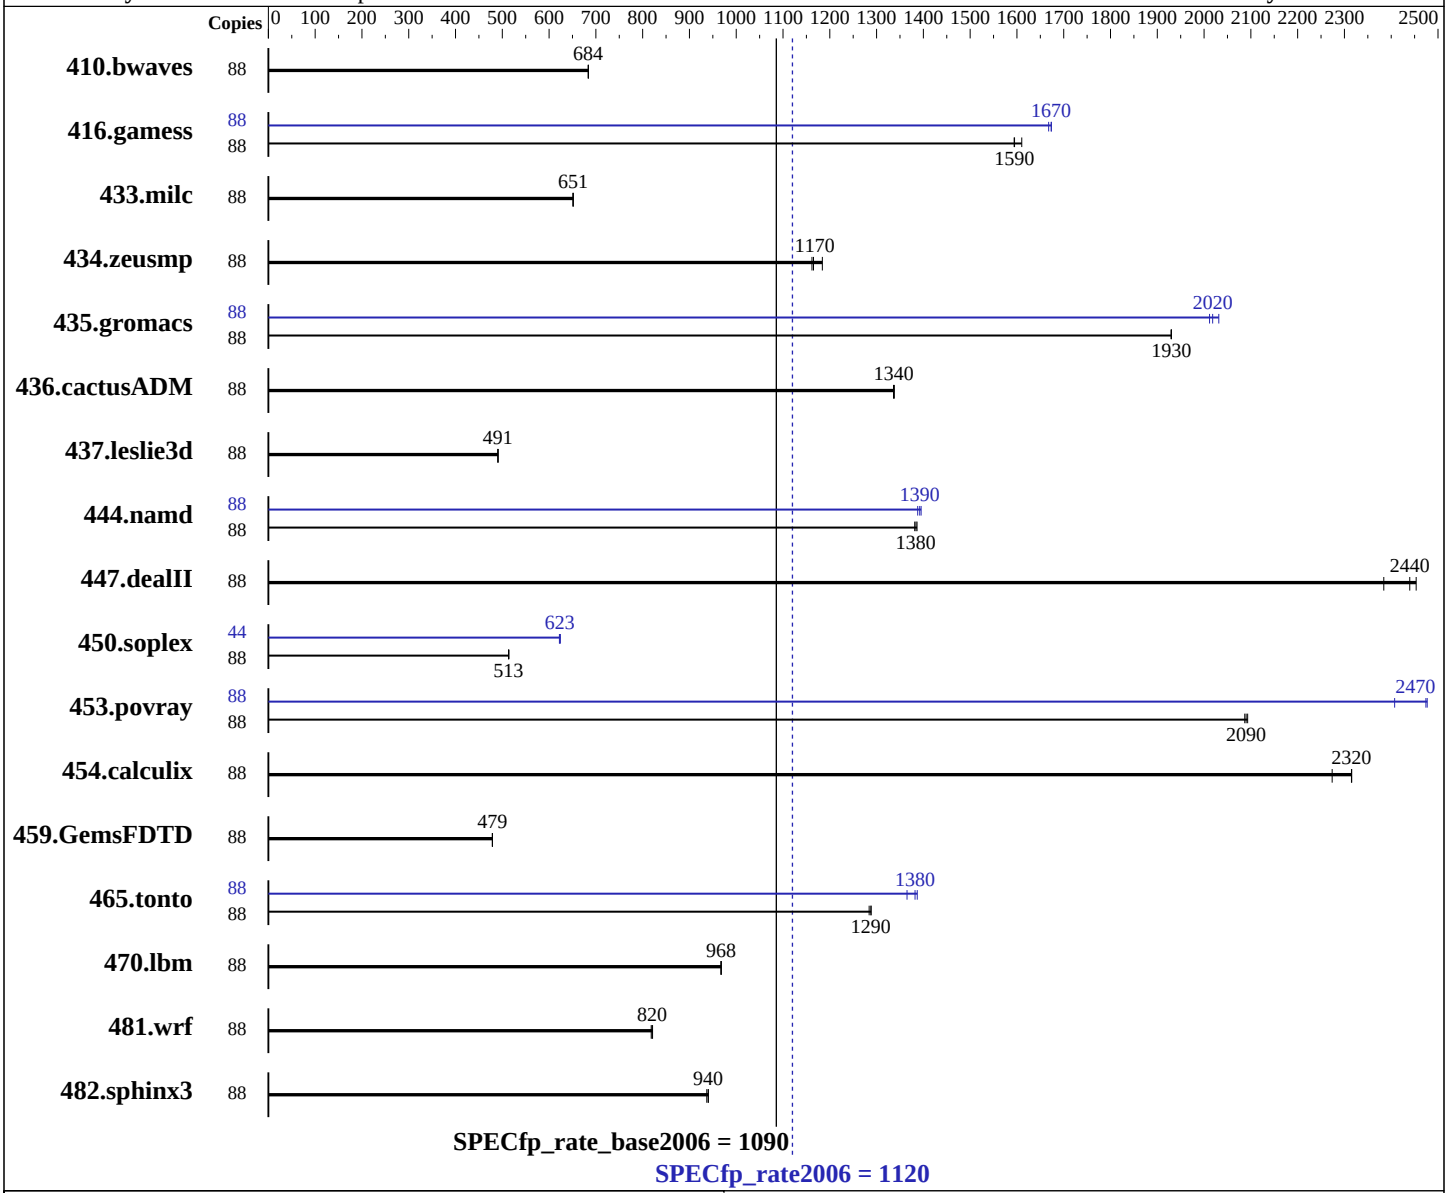


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2699 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.60 GHz |
| CPU MHz: | 2200 |
| FPU: | Integrated |
| CPU(s) enabled: | 44 cores, 2 chips, 22 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |

Continued on next page

## Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 SP1 (x86_64)<br>Kernel 3.12.49-11-default |
| Compiler: | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;<br>Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux |
| Auto Parallel: | No |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkSever RD550
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECfp_rate2006 = 1120

SPECfp_rate_base2006 = 1090

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Feb-2016
**Hardware Availability:** Mar-2016
**Software Availability:** Dec-2015

L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 88 | 1749 | 684 | 1749 | 684 | **1749** | **684** | 88 | 1749 | 684 | 1749 | 684 | **1749** | **684** |
| 416.gamess | 88 | **1080** | **1590** | 1070 | 1610 | 1081 | 1590 | 88 | **1030** | **1670** | 1030 | 1670 | 1033 | 1670 |
| 433.milc | 88 | **1240** | **651** | 1240 | 651 | 1240 | 652 | 88 | **1240** | **651** | 1240 | 651 | 1240 | 652 |
| 434.zeusmp | 88 | 676 | 1180 | **687** | **1170** | 689 | 1160 | 88 | 676 | 1180 | **687** | **1170** | 689 | 1160 |
| 435.gromacs | 88 | 325 | 1930 | 326 | 1930 | **326** | **1930** | 88 | 312 | 2010 | 309 | 2030 | **311** | **2020** |
| 436.cactusADM | 88 | **786** | **1340** | 786 | 1340 | 787 | 1340 | 88 | **786** | **1340** | 786 | 1340 | 787 | 1340 |
| 437.leslie3d | 88 | 1686 | 491 | 1685 | 491 | **1686** | **491** | 88 | 1686 | 491 | 1685 | 491 | **1686** | **491** |
| 444.namd | 88 | 509 | 1390 | 511 | 1380 | **510** | **1380** | 88 | 506 | 1400 | **507** | **1390** | 509 | 1390 |
| 447.dealII | 88 | 410 | 2450 | 422 | 2380 | **413** | **2440** | 88 | 410 | 2450 | 422 | 2380 | **413** | **2440** |
| 450.soplex | 88 | **1430** | **513** | 1430 | 513 | 1427 | 514 | 44 | **589** | **623** | 590 | 622 | 588 | 624 |
| 453.povray | 88 | 224 | 2090 | **224** | **2090** | 224 | 2090 | 88 | **189** | **2470** | 189 | 2480 | 194 | 2410 |
| 454.calculix | 88 | **314** | **2320** | 314 | 2320 | 319 | 2270 | 88 | **314** | **2320** | 314 | 2320 | 319 | 2270 |
| 459.GemsFDTD | 88 | **1950** | **479** | 1950 | 479 | 1950 | 479 | 88 | **1950** | **479** | 1950 | 479 | 1950 | 479 |
| 465.tonto | 88 | **672** | **1290** | 674 | 1280 | 672 | 1290 | 88 | **626** | **1380** | 624 | 1390 | 634 | 1370 |
| 470.lbm | 88 | 1249 | 968 | **1249** | **968** | 1250 | 967 | 88 | 1249 | 968 | **1249** | **968** | 1250 | 967 |
| 481.wrf | 88 | 1201 | 818 | **1198** | **820** | 1197 | 821 | 88 | 1201 | 818 | **1198** | **820** | 1197 | 821 |
| 482.sphinx3 | 88 | 1824 | 940 | **1824** | **940** | 1830 | 937 | 88 | 1824 | 940 | **1824** | **940** | 1830 | 937 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

## Platform Notes

```
BIOS Configuration:
 Cluster On Die set to Enabled
 Early Snoop set to Disabled
 Performance Profile set to Custom
 C1E Support set to Disabled
 Core C3 set to Disabled
 Core C6 set to Disabled
 Thermal Profile set to High Fan Speed
 Memory Power Savings set to Disabled
 Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on RD550_MLK Wed Feb  3 14:14:22 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
       2 "physical id"s (chips)
       88 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 22
       siblings  : 44
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
       28
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
       28
    cache size : 28160 KB

 From /proc/meminfo
    MemTotal:       264548816 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 1
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP1"
       VERSION_ID="12.1"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
       ID="sles"
       ANSI_COLOR="0;32"
```

Continued on next page

## Platform Notes (Continued)

```
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux RD550_MLK 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 3 14:05

SPEC is set to: /home/cpu2006-1.2-ic16.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   690G  7.7G  683G   2% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS LENOVO PB2TS335 01/09/2016
  Memory:
   16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:
icc -m64

Continued on next page

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Apr 6 10:44:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 April 2016.