SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECfp®_rate2006 = 1130

SPECfp_rate_base2006 = 1100

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

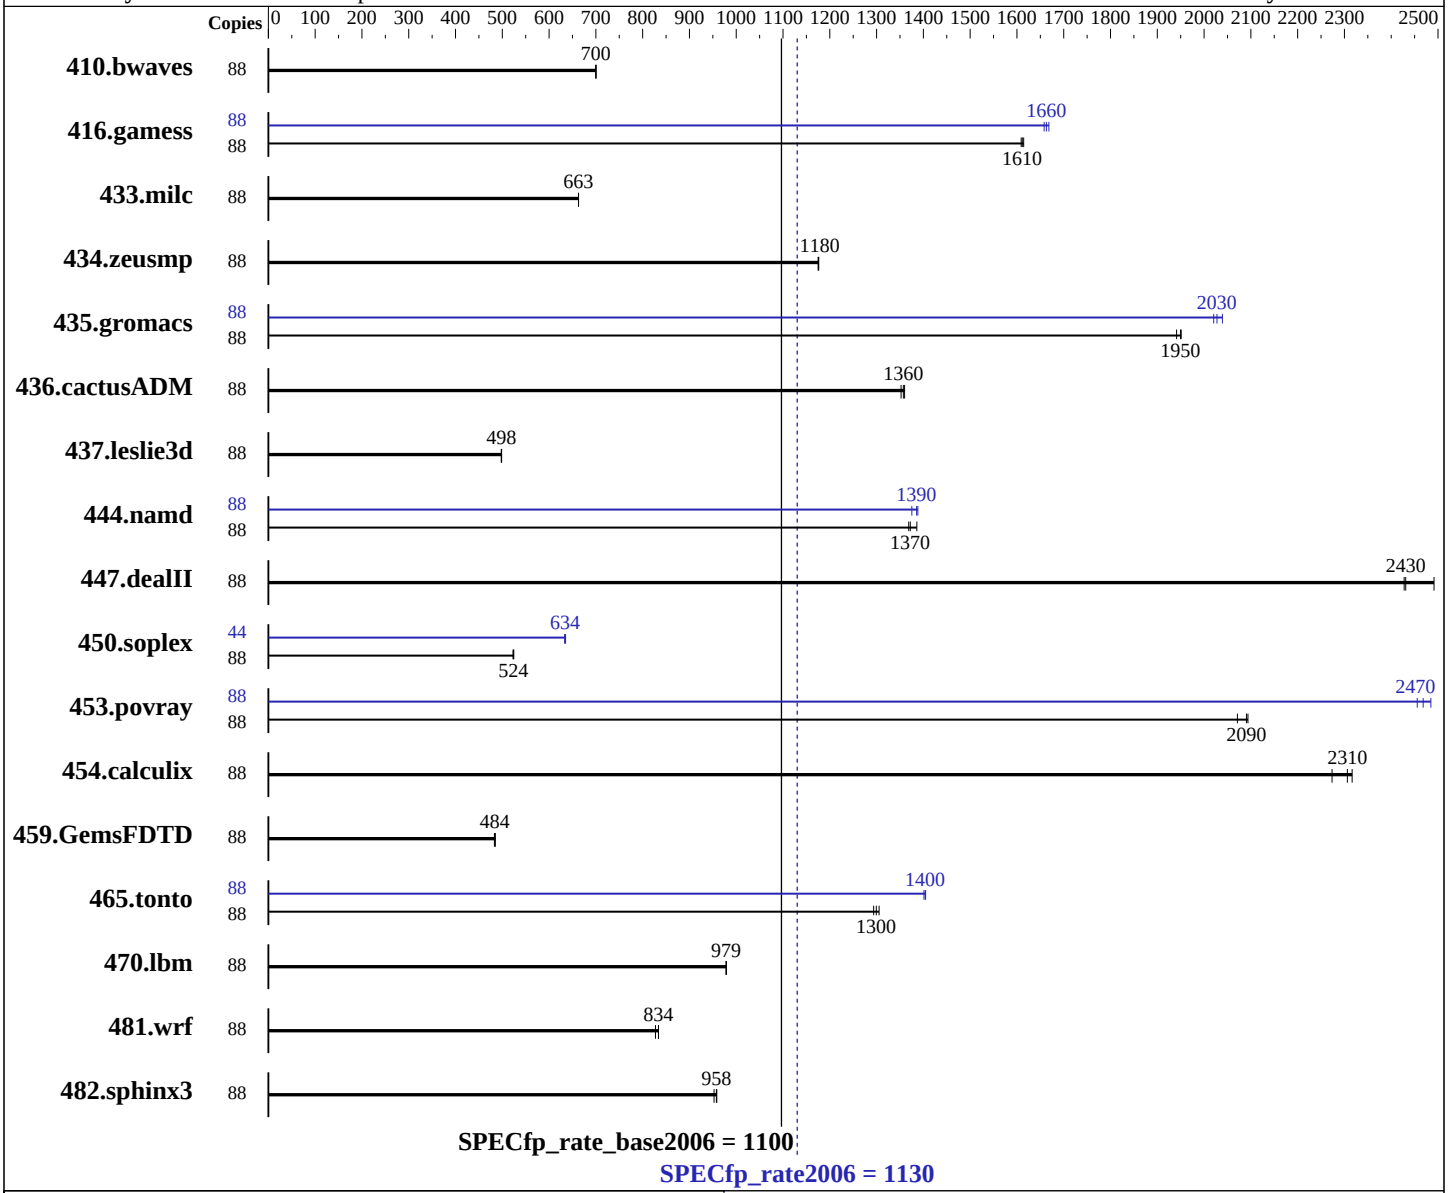

Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3650 M5
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECfp_rate2006 = 1130

SPECfp_rate_base2006 = 1100

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	**1708**	**700**	1708	700	1708	700	88	**1708**	**700**	1708	700	1708	700
416.gamess	88	1071	1610	1067	1610	**1069**	**1610**	88	**1036**	**1660**	1039	1660	1033	1670
433.milc	88	1219	663	1219	663	**1219**	**663**	88	1219	663	1219	663	**1219**	**663**
434.zeusmp	88	681	1180	681	1180	**681**	**1180**	88	681	1180	681	1180	**681**	**1180**
435.gromacs	88	322	1950	324	1940	**322**	**1950**	88	308	2040	311	2020	**310**	**2030**
436.cactusADM	88	**775**	**1360**	773	1360	778	1350	88	**775**	**1360**	773	1360	778	1350
437.leslie3d	88	**1661**	**498**	1659	499	1661	498	88	**1661**	**498**	1659	499	1661	498
444.namd	88	509	1390	**514**	**1370**	516	1370	88	513	1380	**509**	**1390**	508	1390
447.dealII	88	404	2490	**414**	**2430**	415	2430	88	404	2490	**414**	**2430**	415	2430
450.soplex	88	1400	524	**1400**	**524**	1404	523	44	579	633	578	635	**578**	**634**
453.povray	88	224	2090	226	2070	**224**	**2090**	88	191	2460	**190**	**2470**	188	2480
454.calculix	88	319	2270	313	2320	**315**	**2310**	88	319	2270	313	2320	**315**	**2310**
459.GemsFDTD	88	1925	485	**1929**	**484**	1933	483	88	1925	485	**1929**	**484**	1933	483
465.tonto	88	663	1310	**666**	**1300**	669	1290	88	618	1400	616	1400	**617**	**1400**
470.lbm	88	**1235**	**979**	1235	979	1236	979	88	**1235**	**979**	1235	979	1236	979
481.wrf	88	1188	827	**1179**	**834**	1179	834	88	1188	827	**1179**	**834**	1179	834
482.sphinx3	88	**1791**	**958**	1800	953	1789	958	88	**1791**	**958**	1800	953	1789	958

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS Configuration:
 Operating Mode set to "Maximum Performance"
 COD Preference set to Enable
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-q4i7 Sat Jan 23 14:04:40 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
      2 "physical id"s (chips)
      88 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 22
      siblings  : 44
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       263952252 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux linux-q4i7 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Jan 23 14:02

 SPEC is set to: /home/cpu2006-1.2-ic16.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   690G   11G  680G   2% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS LENOVO -[TCE123A-T-1.00]- 01/22/2016
   Memory:
    16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
    8x NO DIMM Unknown

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Apr 6 10:44:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 April 2016.