SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp®_rate2006 = 2030

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

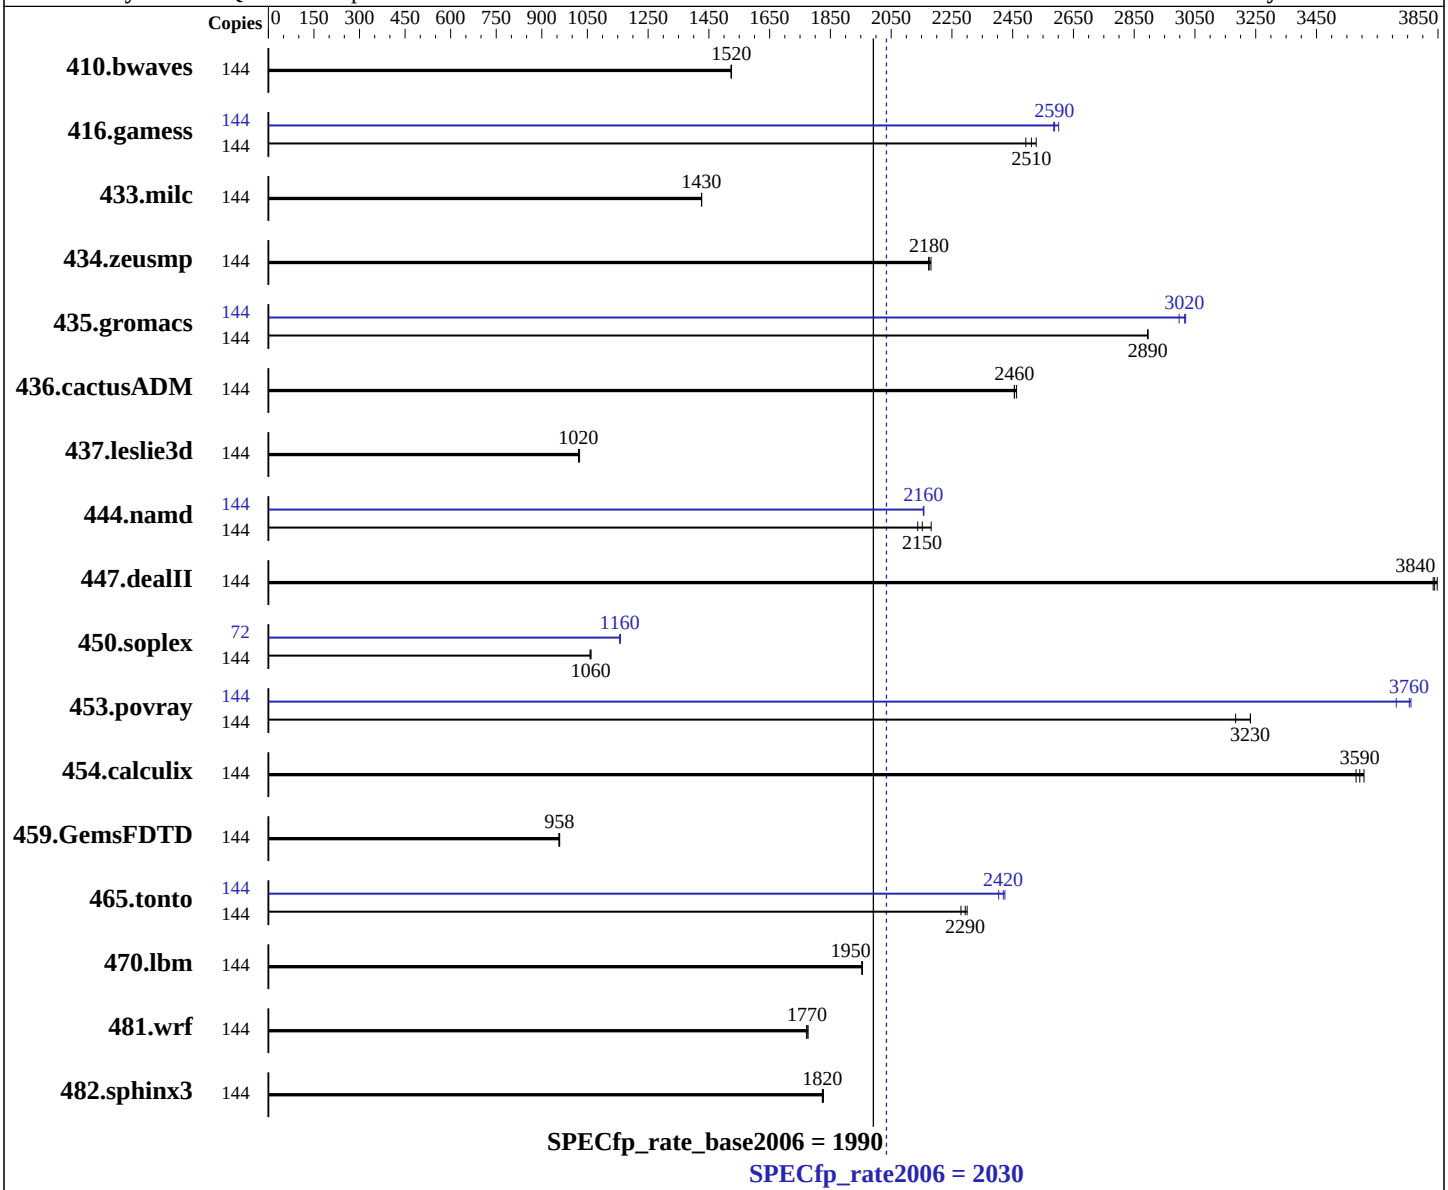

Hardware

CPU Name:	Intel Xeon E7-8890 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	72 cores, 4 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,3,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate2006 = 2030

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 480 GB SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	1285	1520	**1284**	**1520**	1284	1520	144	1285	1520	**1284**	**1520**	1284	1520
416.gamess	144	1131	2490	**1123**	**2510**	1116	2530	144	1084	2600	1091	2580	**1089**	**2590**
433.milc	144	927	1430	**927**	**1430**	927	1430	144	927	1430	**927**	**1430**	927	1430
434.zeusmp	144	**602**	**2180**	601	2180	603	2170	144	**602**	**2180**	601	2180	603	2170
435.gromacs	144	355	2900	**355**	**2890**	355	2890	144	341	3020	**341**	**3020**	343	3000
436.cactusADM	144	**701**	**2460**	699	2460	701	2460	144	**701**	**2460**	699	2460	701	2460
437.leslie3d	144	1321	1020	**1326**	**1020**	1326	1020	144	1321	1020	**1326**	**1020**	1326	1020
444.namd	144	529	2180	**537**	**2150**	540	2140	144	**535**	**2160**	535	2160	536	2160
447.dealII	144	**429**	**3840**	430	3830	428	3850	144	**429**	**3840**	430	3830	428	3850
450.soplex	144	**1132**	**1060**	1131	1060	1134	1060	72	519	1160	**519**	**1160**	518	1160
453.povray	144	241	3180	237	3230	**237**	**3230**	144	204	3760	206	3710	**204**	**3760**
454.calculix	144	329	3610	**331**	**3590**	332	3580	144	329	3610	**331**	**3590**	332	3580
459.GemsFDTD	144	1593	959	1598	956	**1595**	**958**	144	1593	959	1598	956	**1595**	**958**
465.tonto	144	616	2300	622	2280	**618**	**2290**	144	**586**	**2420**	584	2420	589	2400
470.lbm	144	**1012**	**1950**	1012	1960	1013	1950	144	**1012**	**1950**	1012	1960	1013	1950
481.wrf	144	905	1780	908	1770	**907**	**1770**	144	905	1780	908	1770	**907**	**1770**
482.sphinx3	144	1539	1820	1536	1830	**1539**	**1820**	144	1539	1820	1536	1830	**1539**	**1820**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/speccpu-auto-install/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Mar  1 23:21:58 2016
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
      4 "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 46080 KB

From /proc/meminfo
   MemTotal:       528058100 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.1 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.1"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
   EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 1 10:31 last=5

SPEC is set to: /home/speccpu-auto-install
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda5      xfs   393G  128G  265G  33% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. S4L_3B08 10/15/2015
   Memory:
    64x NO DIMM NO DIMM
    32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu-auto-install/libs/32:/home/speccpu-auto-install/libs/64:/home/speccpu-auto-install/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Base Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.xml

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate2006 = 2030

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 5 14:55:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 April 2016.