



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation
DX20a-X (Intel Xeon D-1541)

SPECfp[®]2006 = 70.8

SPECfp_base2006 = 68.6

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

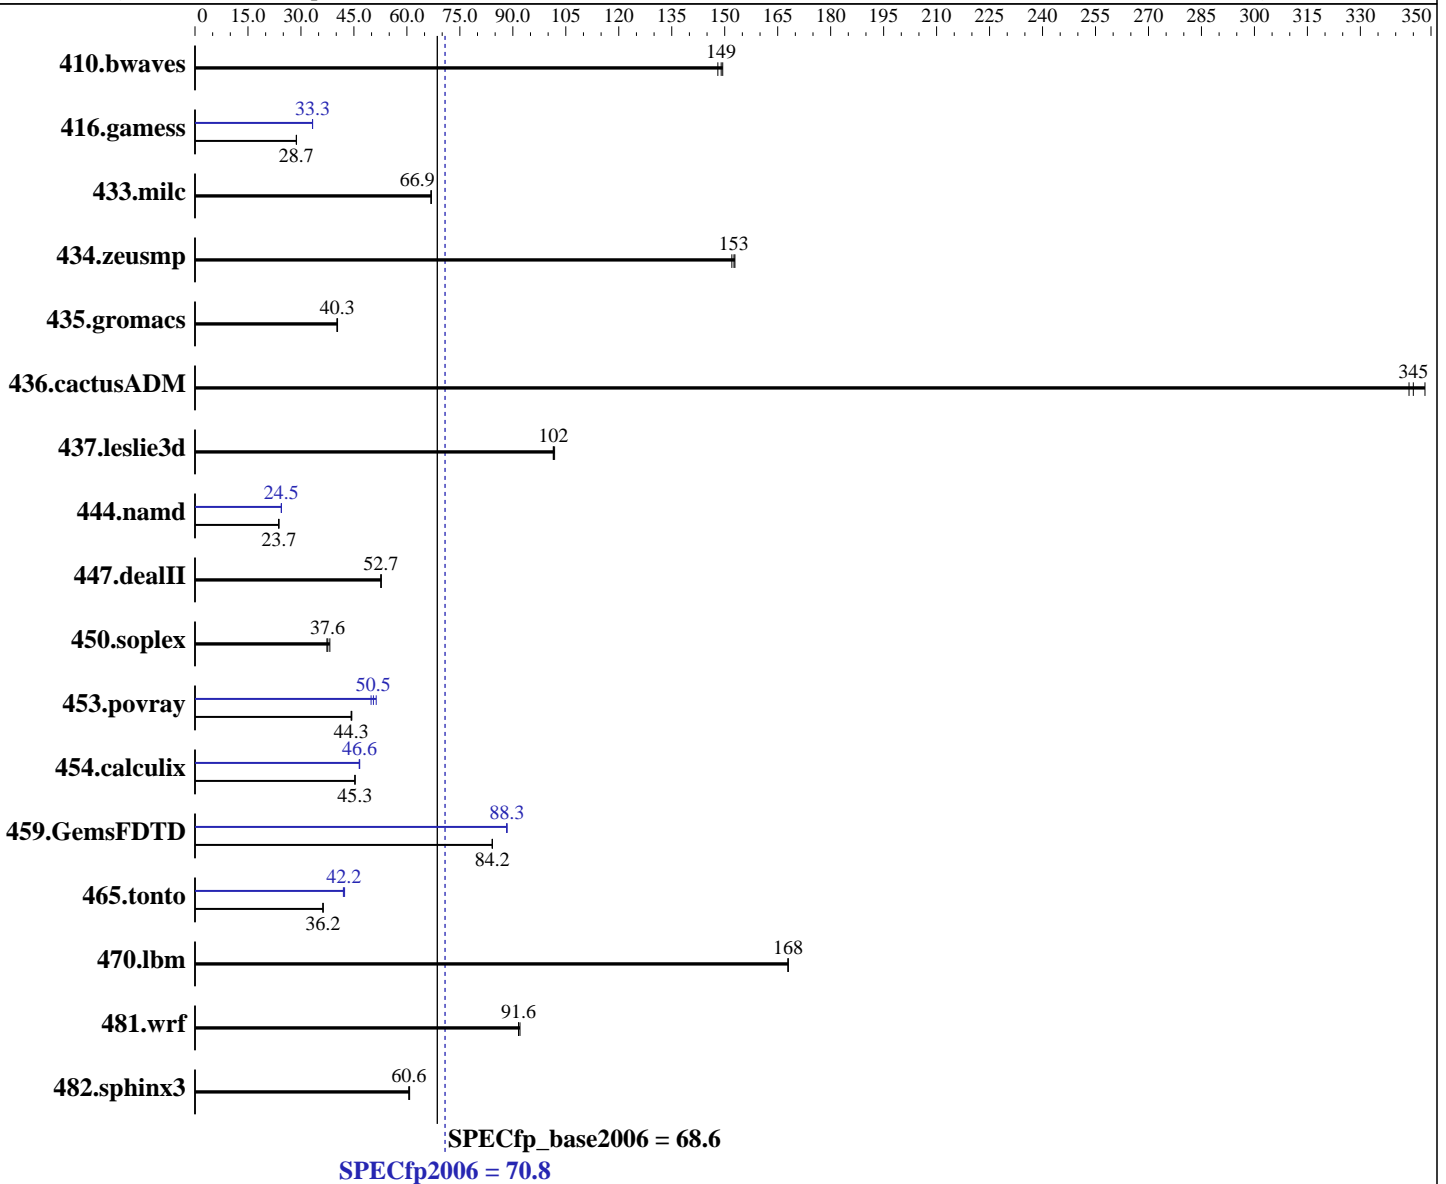

Hardware

CPU Name: Intel Xeon D-1541
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation
DX20a-X (Intel Xeon D-1541)

SPECfp2006 = 70.8
SPECfp_base2006 = 68.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation
Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-T)
Disk Subsystem: 1 x 512 GB SATA, SSD
Other Hardware: None
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	90.9	149	<u>91.2</u>	<u>149</u>	91.8	148	90.9	149	<u>91.2</u>	<u>149</u>	91.8	148
416.gamess	681	28.7	682	28.7	<u>682</u>	<u>28.7</u>	<u>588</u>	<u>33.3</u>	589	33.3	588	33.3
433.milc	<u>137</u>	<u>66.9</u>	137	66.9	137	66.8	<u>137</u>	<u>66.9</u>	137	66.9	137	66.8
434.zeusmp	59.9	152	59.5	153	<u>59.6</u>	<u>153</u>	59.9	152	59.5	153	<u>59.6</u>	<u>153</u>
435.gromacs	177	40.4	<u>177</u>	<u>40.3</u>	178	40.2	177	40.4	<u>177</u>	<u>40.3</u>	178	40.2
436.cactusADM	34.8	344	34.3	348	<u>34.6</u>	<u>345</u>	34.8	344	34.3	348	<u>34.6</u>	<u>345</u>
437.leslie3d	<u>92.6</u>	<u>102</u>	92.3	102	92.7	101	<u>92.6</u>	<u>102</u>	92.3	102	92.7	101
444.namd	337	23.8	<u>338</u>	<u>23.7</u>	339	23.7	328	24.5	<u>328</u>	<u>24.5</u>	328	24.5
447.dealII	217	52.6	<u>217</u>	<u>52.7</u>	217	52.7	217	52.6	<u>217</u>	<u>52.7</u>	217	52.7
450.soplex	<u>222</u>	<u>37.6</u>	218	38.2	223	37.4	<u>222</u>	<u>37.6</u>	218	38.2	223	37.4
453.povray	<u>120</u>	<u>44.3</u>	120	44.2	120	44.4	<u>105</u>	<u>50.5</u>	107	49.9	104	51.3
454.calculix	<u>182</u>	<u>45.3</u>	182	45.3	182	45.3	177	46.5	<u>177</u>	<u>46.6</u>	177	46.6
459.GemsFDTD	126	84.2	<u>126</u>	<u>84.2</u>	126	84.2	120	88.2	<u>120</u>	<u>88.3</u>	120	88.4
465.tonto	271	36.3	<u>271</u>	<u>36.2</u>	271	36.2	234	42.0	<u>233</u>	<u>42.2</u>	232	42.4
470.lbm	81.8	168	<u>81.8</u>	<u>168</u>	81.8	168	81.8	168	<u>81.8</u>	<u>168</u>	81.8	168
481.wrf	<u>122</u>	<u>91.6</u>	121	92.0	122	91.6	<u>122</u>	<u>91.6</u>	121	92.0	122	91.6
482.sphinx3	321	60.8	322	60.5	<u>321</u>	<u>60.6</u>	321	60.8	322	60.5	<u>321</u>	<u>60.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance
Patrol Scrub: Disabled



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	70.8
DX20a-X (Intel Xeon D-1541)	SPECfp_base2006 =	68.6

CPU2006 license: 9006	Test date: Mar-2016
Test sponsor: NEC Corporation	Hardware Availability: Mar-2016
Tested by: NEC Corporation	Software Availability: Nov-2015

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	70.8
DX20a-X (Intel Xeon D-1541)	SPECfp_base2006 =	68.6

CPU2006 license: 9006	Test date: Mar-2016
Test sponsor: NEC Corporation	Hardware Availability: Mar-2016
Tested by: NEC Corporation	Software Availability: Nov-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	70.8
DX20a-X (Intel Xeon D-1541)	SPECfp_base2006 =	68.6

CPU2006 license: 9006	Test date: Mar-2016
Test sponsor: NEC Corporation	Hardware Availability: Mar-2016
Tested by: NEC Corporation	Software Availability: Nov-2015

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
 -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	70.8
DX20a-X (Intel Xeon D-1541)	SPECfp_base2006 =	68.6

CPU2006 license: 9006	Test date: Mar-2016
Test sponsor: NEC Corporation	Hardware Availability: Mar-2016
Tested by: NEC Corporation	Software Availability: Nov-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:13:41 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.